
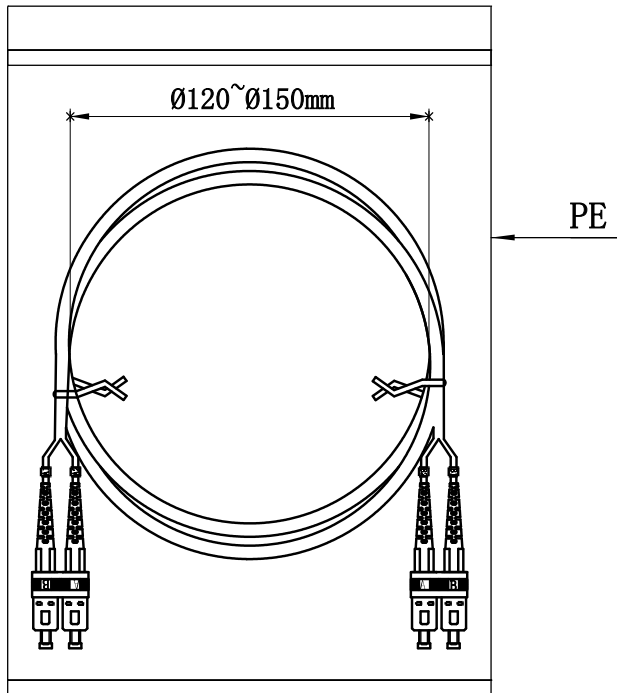


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

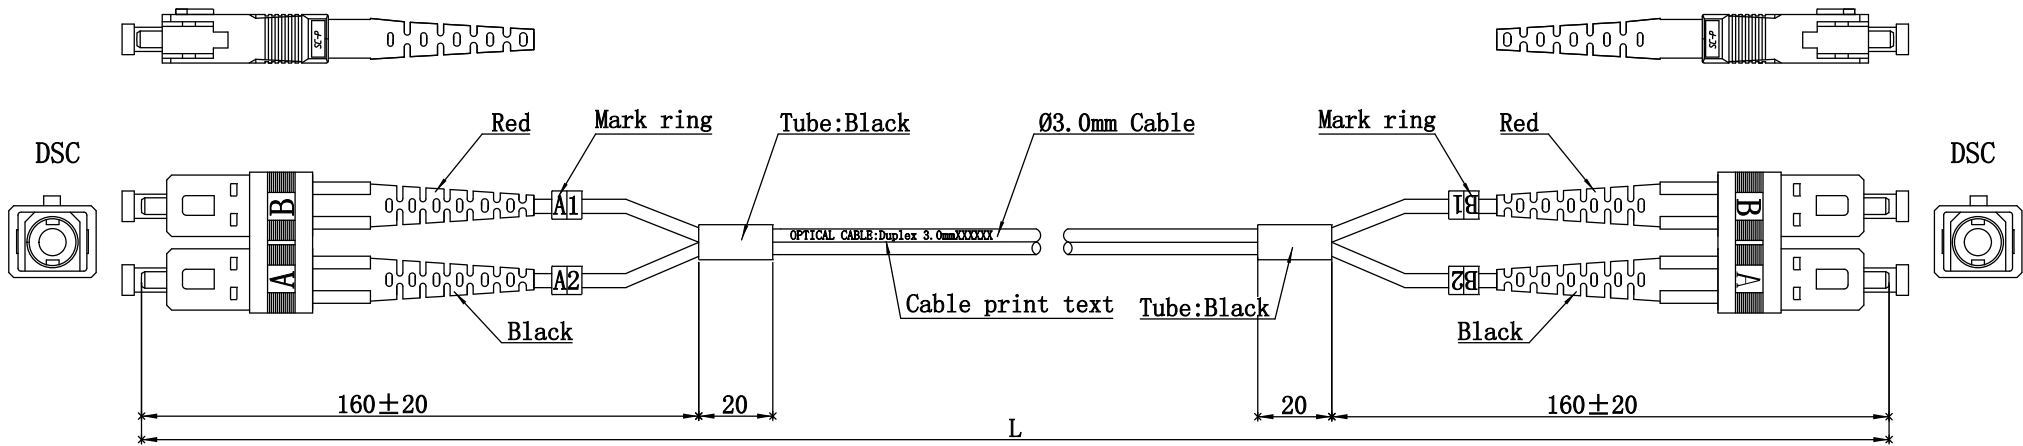

Specifications:

Type	DSC/UPC-DSC/UPC
Fiber Mode	OM3
Core Diameter (um)	50/125
Operating Wavelength (nm)	850/1300
Cable Color	Aqua
Cable Diameter (mm)	Ø3.0
Operating Temperature (° C)	-40~+75
Storage Temperature (° C)	-40~+85
Insertion loss (dB)	≤0.2dB
Return loss (dB)	≥35dB
SC Connector Color (Boot)	Red/Blcak

L ≤ 5m, TOLERANCES: 0 ≤ ΔL ≤ 5cm  
 L > 5m, TOLERANCES: 0 ≤ ΔL ≤ 1%\*L

Remarks:

Length	ITEM NO.
L=1M	102634
L=2M	102635
L=3M	102636
L=5M	102637
L=10M	102638
L=15M	102639



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
①				
②				
③				

Unless specified on the drawing, tolerances are per the follows:  
 .x +1  
 +0.2  
 .xx +0.05

DRAWN BY	DATE: 2015/05/14	DESCRIPTION: SC-SC-DX OM3 Patchcord
CHECKED BY	SHEET 1of1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm