






NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION


Rev.	Rev.Date	Modified By	Brief Description

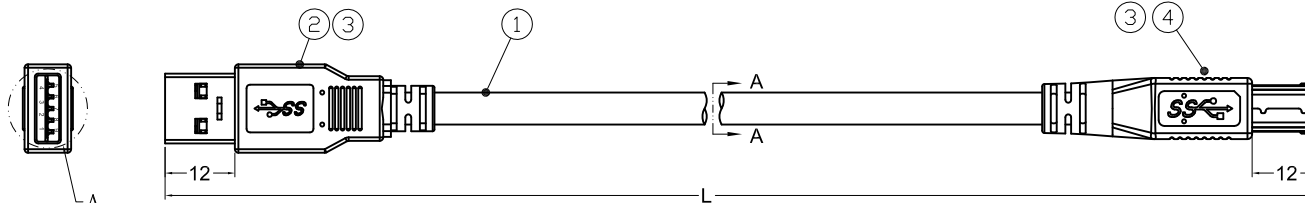

BLACK INK MARKING: USB 3.0 CABLE 28AWG AWM E139315-F5 STYLE 2725 80°C 30V VW-1

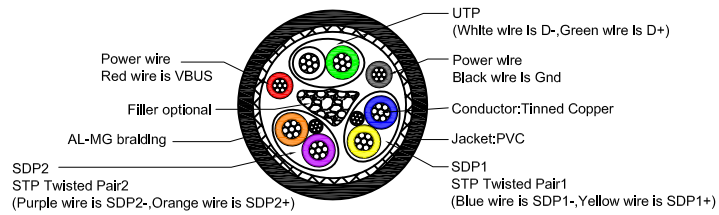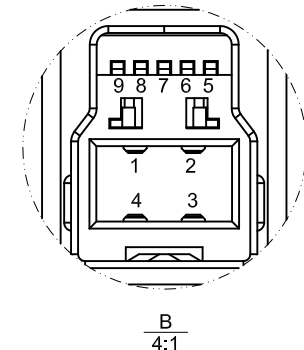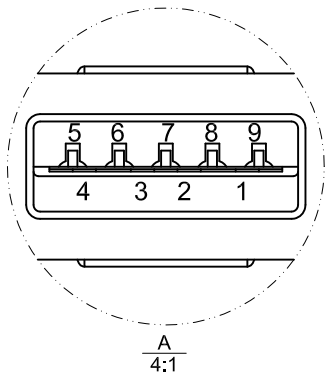

SECTION A-A



RATING TEMPERATURE: -10°C~+80°C  
 RATING VOLTAGE: 30V.  
 INSULATION RESISTANCE: DC/250V 10MΩ MIN.  
 WITHSTAND VOLTAGE: AC/250V 5mA FOR ONE MINUTE.  
 CONDUCTOR RESISTANCE:2Ω MAX.

Standard_A Plug		Wire		Standard_B Plug	
Pin	Signal Name	Wire	Signal Name	Pin	Signal Name
1	VBUS	1	PWR	1	VBUS
2	D-	2	UTP_D-	2	D-
3	D+	3	UTP_D+	3	D+
4	GND	4	GND_PWRrt	4	GND
5	SSRX-	5	SDP1-	5	SSTX-
6	SSRX+	6	SDP1+	6	SSTX+
7	GND_Drain	7、10	SDP1_Drain SDP2_Drain	7	GND_Drain
8	SSTX-	8	SDP2-	8	SSRX-
9	SSTX+	9	SDP2+	9	SSRX+
Shell	Shield	Braid	Shield	Shell	Shield

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
④	USB 3.0 B Male Plug	Terminal:Phos/Brass,Gold plated G/F	1	Pcs
③	Molding	PVC: BLUE	A/R	g
②	USB 3.0 A Male Plug	Terminal:Phos/Brass,Gold plated G/F	1	Pcs
①	USB 3.0 CABLE	USB 3.0 CABLE 3P*28AWG+2C*28AWG	L	mm



<b>DRAWN BY</b>	DATE: 2012/09/17	DESCRIPTION: USB 3.0 A-Male to B-Male
<b>CHECKED BY</b>	SHEET 1of1	ITEM NO. 101703
<b>APPROVED BY</b>	SCALE 1:1	REV.00 UNIT:mm