








NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

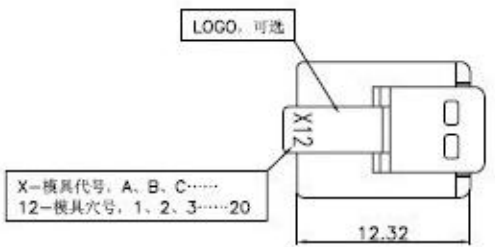

X-模具代号, A, B, C.....
12-模具穴号, 1, 2, 3.....20

SPECIFICATION
 1.ELECTRICAL
 1.INSULATION RESISTANCE:1000MΩ MIN
 2.DIELECTRIC STRENGTH:1000VAC(50-60Hz)1MINUTE
 3.CONTACT RESISTANCE:30mΩ MAX
 2.MECHANICAL
 1.CABLE TO PLUG TENSILE STRENGTH:5.4Kg MIN
 2.DURABILITY:750 CYCLES MIN



6P4CM XX XX XX XX XX C	
6P4CM	C-1000PCS/袋
	五金件+电镀码
	L2-
	01-
	05-UL94V-2,4# 无色透明
	02-UL94V-0,4# 无色透明
	F8-0.8u" 15-15u"
	03-3u" 30-30u"
	06-6u" 50-50u"
01-	
02-	

(mm)		
UTP,	0.80~0.85	F1
	0.85~0.90	F2
	0.90~0.95	F3
	0.95~1.00	F4
	1.00~1.05	F5
UTP,	1.05~1.10	F6
	1.10~1.15	F7
	0.80~0.85	F8
	0.85~0.90	F9
	0.90~0.95	F0
	0.95~1.00	F1
	1.00~1.05	F2
	1.05~1.10	F3
	1.10~1.15	F4

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	Plug Type	RJ11		
②	Cable Type	Stranded Flat Wire		
①	Connector	(6p 4c)		



BestLinkNetware

DRAWN BY	DATE:	DESCRIPTION:
CHECKED BY	SHEET 1 of 1	ITEM NO. 170301
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm