



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

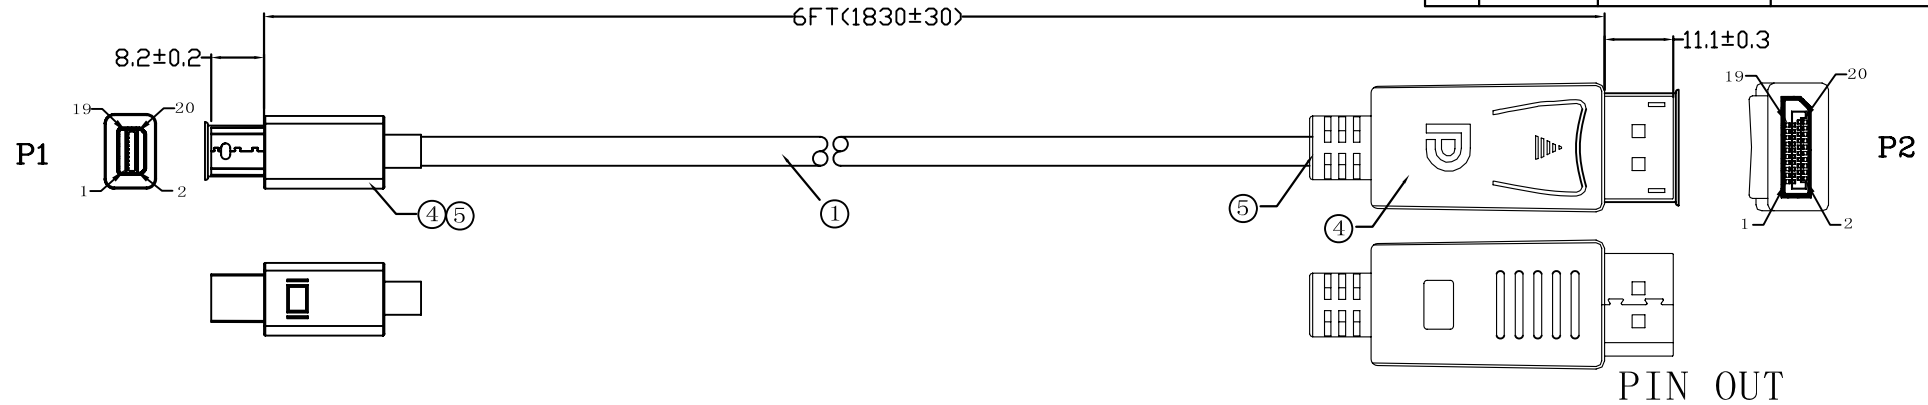

NOTE:


- CABLE: 32AWG (7/0.08T*1P+DAM)*5P+32AWG (7/0.08T)*5C+DAB (85%AL) PVC JACKET: BLACK
OD: 5.5±0.2mm
MARK: DisplayPort Cable Exxxxxx AWM STYLE 20276 80°C 30V VW-1
- CONNECTORS:
DP (M) Plug, CONTACT: GOLD PLATED 3U", SHELL: NICKEL PLATED INSULATION: BLACK.
MINI DP (M) Plug, CONTACT: GOLD PLATED 3U", SHELL: NICKEL PLATED INSULATION: WHITE.
- ELECTUONICAL TEST:
(1). 100% OPEN SHORT & MISS WIRE TEST
(2). INSULATION: DC 300V/0.01s 10Mohm Min
(3). CONTACTOR RESISTANCE: 5 ohm
- ROHS compliant

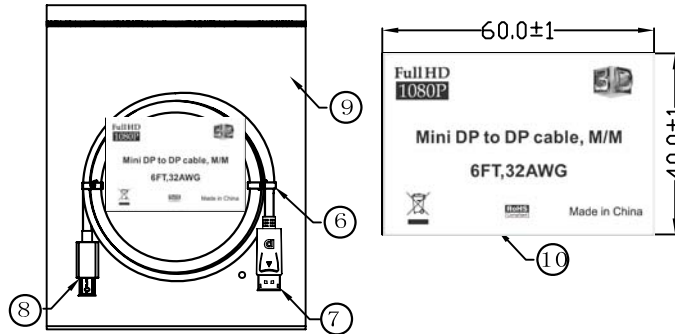

PIN OUT

P1	Wire Color	P2	SIGNAL NAME
1	D.W	11	GND
3		12	ML_Lane 0 (p)
5		10	ML_Lane 0 (n)
7	D.W	8	GND
9		9	ML_Lane 1 (p)
11		7	ML_Lane 1 (n)
13	D.W	5	GND
15		6	ML_Lane 2 (p)
17		4	ML_Lane 2 (n)
19		19	GND
2		18	Hot Plug Detect
4		13	CONFIG 1
6		14	CONFIG 2
8	D.W	2	GND
10		3	ML_Lane 3 (p)
12		1	ML_Lane 3 (n)
14	D.W	16	GND
16		15	AUX_CH (p)
18		17	AUX_CH (n)
20		20	
SHELL	D.W	SHELL	

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑩	Label	HKDP911B/Z-U026, 10FT copperplate paper Size: 60*40mm Lable Customer No. 184011	1	PCS
⑨	PE Bag	SIZE: 180*210*T0.08mm	1	PCS
⑤	CAP	MINI DisplayPor Male Dust Cover	1	PCS
⑦	CAP	DisplayPort Male Dust Cover	1	PCS
⑥	TIE	L=100MM	2	PCS
⑤	PVC	BLACK PVC 45P	0.008	KG
④	PE	PE: LDPE NATURE	0.008	KG
③	DP CONN	DP Male Plug Pin Gold Plated 3U", Shell Nickel Plated Insulation Black ABS Hood	1	SET
②	MINI DP CONN	MINI DP Male Plug Pin Gold Plated 3u", Shell Nickel Plated Insulation White	1	SET
①	CABLE	32AWG (7/0.08T*1P+DAM)*5P+32AWG (7/0.08T)*5C+ADB (16/6/0.12) AL PVC JACKET: BLACK OD: 5.5±0.2mm	1.86	M



BestLinkNetware

DRAWN BY <i>Jane</i>	DATE: 2014.05.28	DESCRIPTION: 6FT Mini DP Male to DP Male Cable
CHECKED BY	SHEET 1 of 1	ITEM NO. 184011
APPROVED BY	SCALE NONE	REV.00 UNIT:mm