
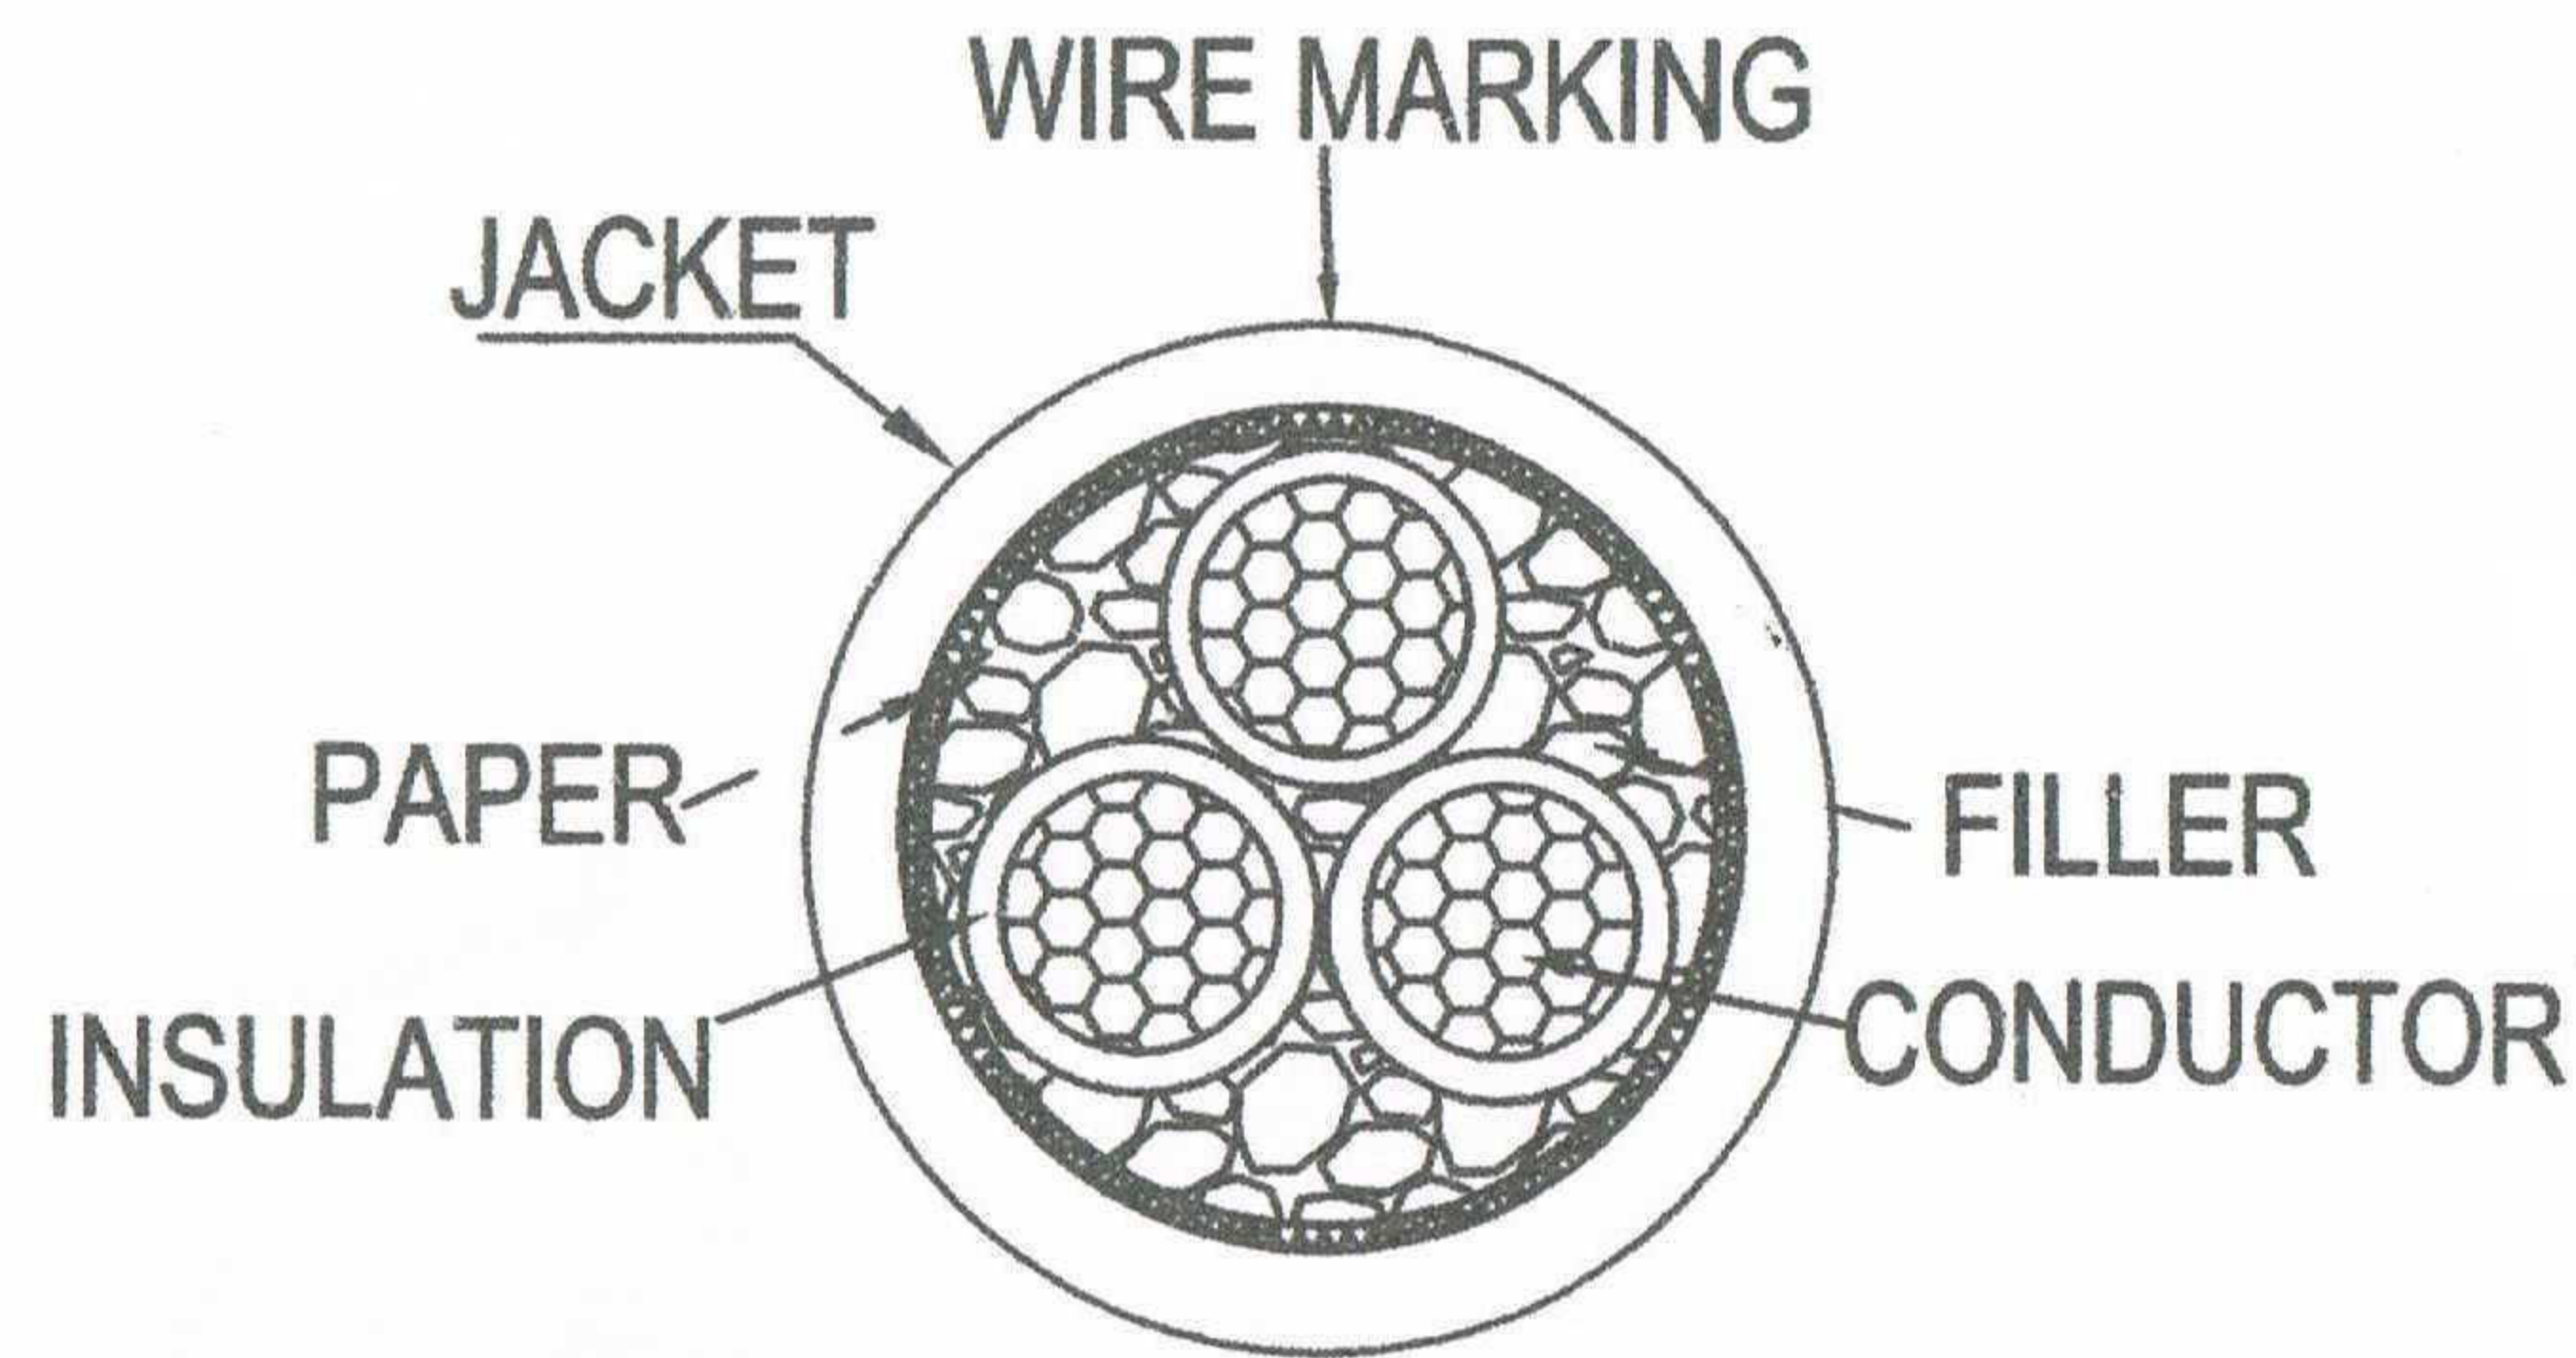


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
	2016-01-18	zhang	Mark Cable

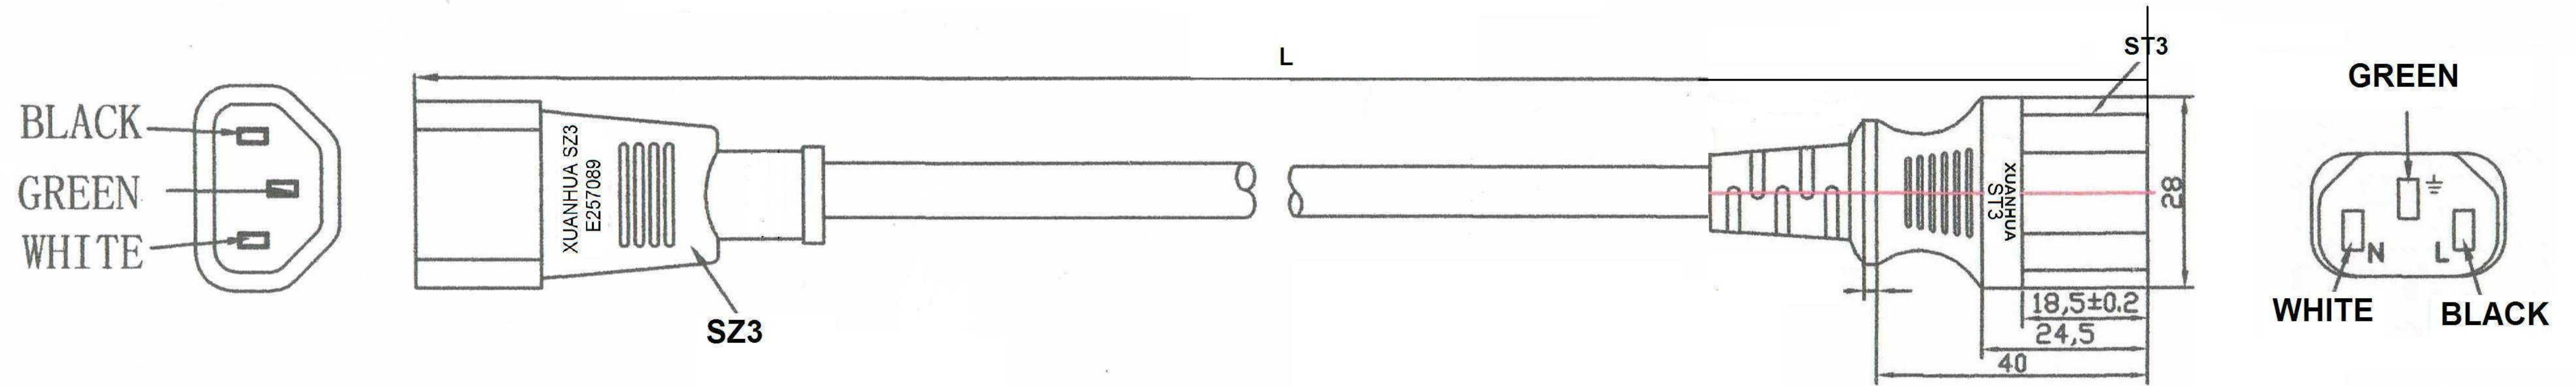

<b>WIRE MARKING:</b> (Hollow)		UL c(UL) SVT 3C 18AWG(0.824mm <sup>2</sup> ) 60C VW-1 300V E313867 100030-765 FT1 NINGBO XUANHUA					
Conductor		Insulation		Jacket		Overall diameter	
AWG	Resistance maximum (≤)	Min.Thick	Diameter	Min.Thick	AVG.Thick		
18# 41/0.16	at20°C≤22.4ohms/km at25°C≤22.8ohms/km	0.33mm	2.0±0.1mm	0.61mm	0.76mm	6.2+-0.15mm	

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)

ELECTRIC TESTING:

- 1.100% OPEN&SHORT TESTING
- 2.VOLTAGE RATING:AC>=1500V/S
- 3.PLUG(XH202)RATED POWER:  
125V 10A UL-E257089
- 4.PLUG(XH006A)RATED POWER:  
125V 10A UL-257089
- 5.WIRE:SVT 18/3 RATED POWER PVC
- 6.COLOR: BLACK

Item No	Length (ft)	T (inche)
210148BK	1	±0.79
210149BK	3	±0.79
210102BK	6	±0.79
210150BK	10	±0.79



DRAWN BY: FENG	DATE: 2016/01/16	DESCRIPTION: Power Extension Cord C13 to C14 BLK SVT 18/3
CHECKED BY: ZHANG	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE	REV. 00
		UNIT: mm

