



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

Item No	Length (ft)	T (inche)
210306BK	4	±0.79
210301BK	6	±0.79
210308BK	10	±0.79

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	21.12.14	ZHANG	CABLE INSULATION SPECIFICATION

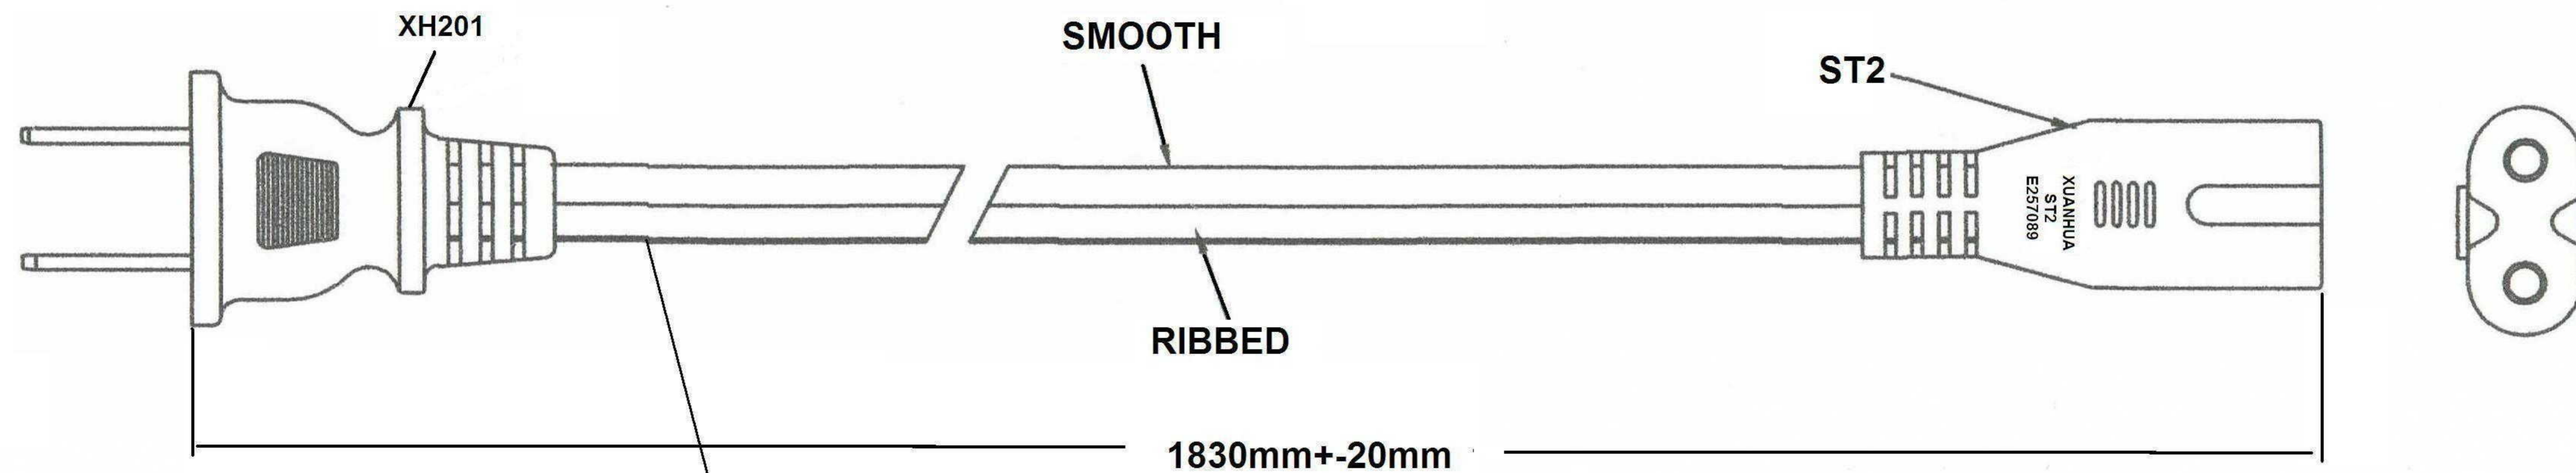


UL c(UL) SPT-2 2C 18AWG(0.824mm2) 60C VW-1
300V E313867 100030-765 FT1 XUANHUA

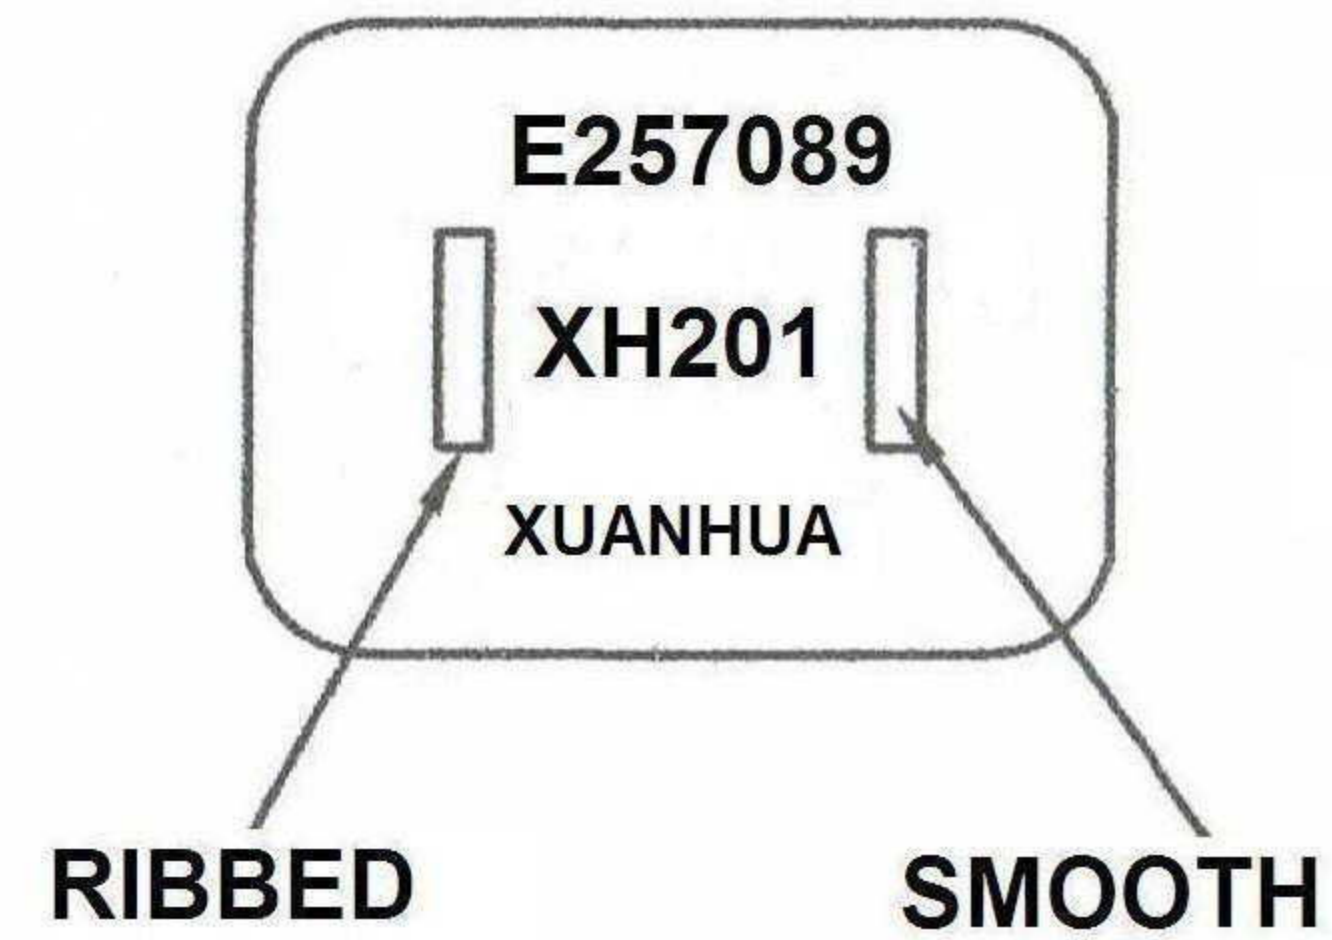

ELECTRIC TESTING:

- 100% OPEN&SHORT TESTING
- VOLTAGE RATING: AC>=1500V/S
- PLUG(XH201)RATED POWER:
125V 10A UL-E257089
- PLUG(ST2) RATED POWER:
125V 10A UL-E257089
- WIRE:SPT-2 18/2 RATED POWER:
300V 10A UL-E313867
- COLOR: BLACK

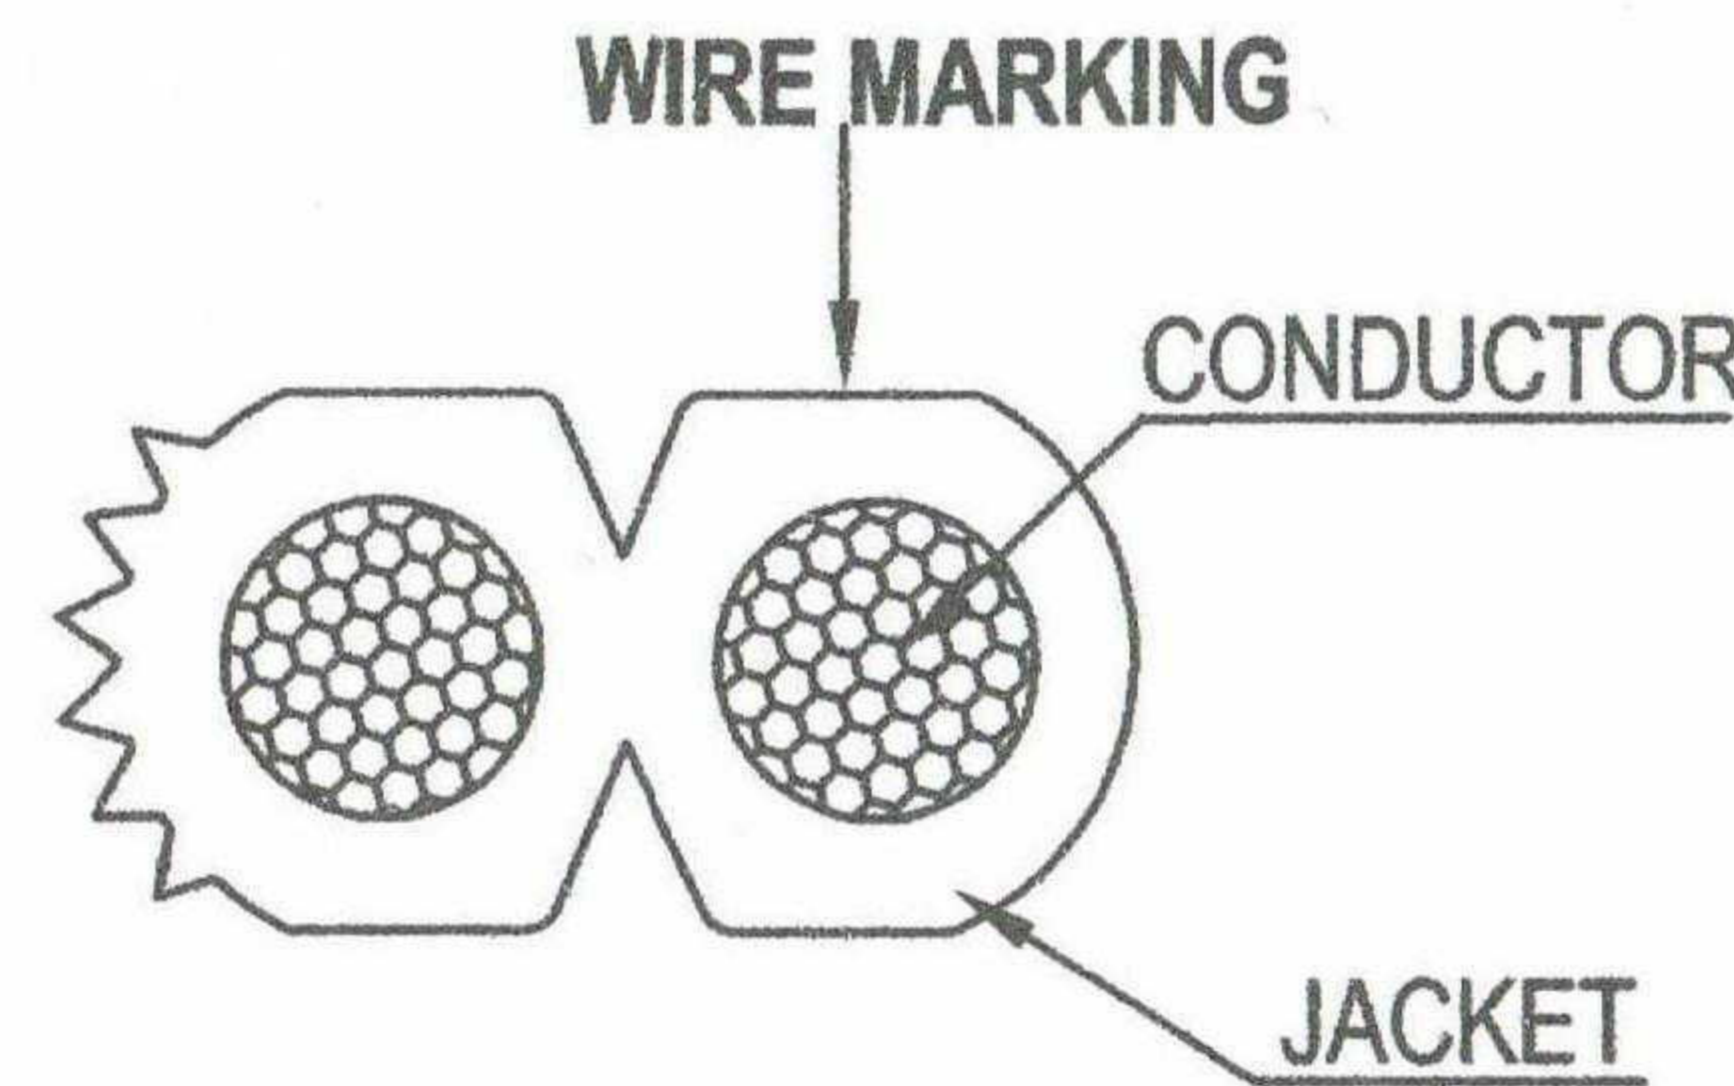

CONDUCTOR	INSULATION		JACKET		OVERALL DIA.
	AWG	Min Thick	Diameter	Min Thick	
18AWG 41/0.16	/	/	1.01mm	1.14MM	3.5+7.0+-0.2

NOTE:If the conductors O.D is go beyond the scope,the resistance of conductor is standard then.

DRAWN BY WANG		DATE: 2015/01/14	DESCRIPTION: XH201+ST2 SPT-2 18/2	
CHECKED BY ZHANG		SHEET 1 of 1	ITEM NO.	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm	

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①	201301R	CABLE INSULATION SPECIFICATION		