

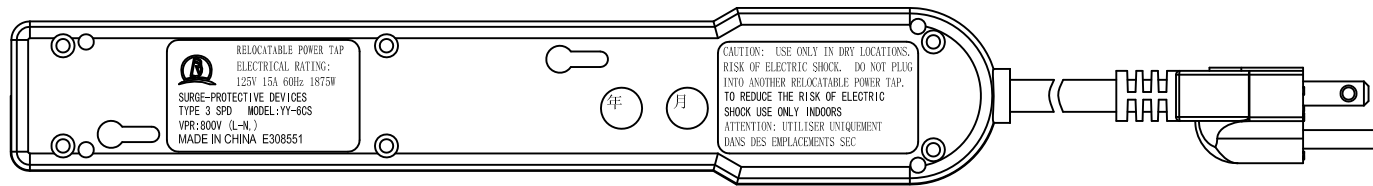
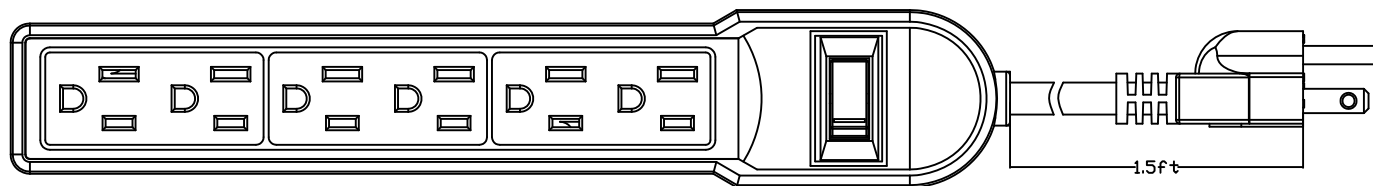



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

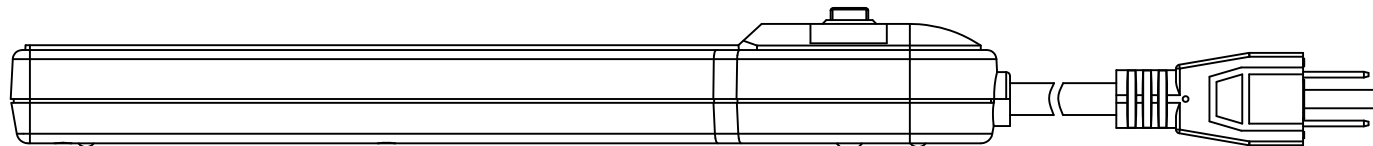

(UL) SJT 300V 75°C VPI-1 332.06mm² (14AWG) E308868 D1VA 133788-01






BestLinkNetware

DRAWN BY	DATE: 2012/09/08	DESCRIPTION: 1.5Ft 6 Outlet Surge Protector
CHECKED BY	SHEET 1 of 1	ITEM NO. 215078
APPROVED BY	SCALE	REV. 00 UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				

Product Specification

Item no	215078	Description:	6 Outlet Power Strip with Surge				
Photo(s)		Color	Indent Marking based on cULus or equivalent standard				
		Grey	(ETL)us ETL# _____ SJT 3X14AWG 60°C 300V VW-1 c(ETL) SJT 3X2.08mm2 (14AWG) FT2				
		Raw Material					
		Plastic: ABS 110g					
		Copper Strip: 11g					
Key Features & Specs		ON/OFF Swith: with Light	Compound Requirement				
Male Blades:UL CUL Recognized Components(NEMA-5-15P) Female Contacts:UL CUL Recognized Components(NEMA-5-15P) Female Ground:UL CUL Recognized Components(NEMA-5-15P) Label:UL CUL required Agency Approvals:ETL Listing Rate: AC 15A 125V 60Hz 1875W Maximum Surge: 7000Amp,6000V,90J		Cabel: 3C SJT 14AWG 6FT	PVC 60°C Insulation Compound Approved for SJT Cable				
		Jacket Construction	Cold Bend Test Requirement				
		100% Fully Pressure Extruded Jacket	Must pass cold bend test at -20°C				
Test		Test					
		Hipot test @1.5KV					
		Power test @ with light can light					
		Drop test @70cm					
		Grounded test@ with ground equirement					
ETL file #	UL file #	CSA/UL file #					
	E308551			Date: 2011.11.15			