
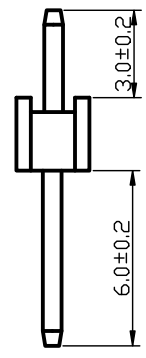
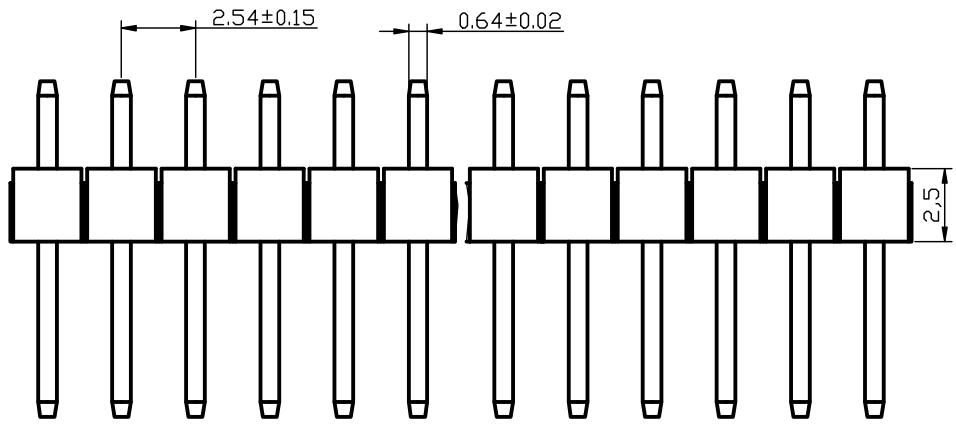


1 2 3 4 5

A
B
C
D
E

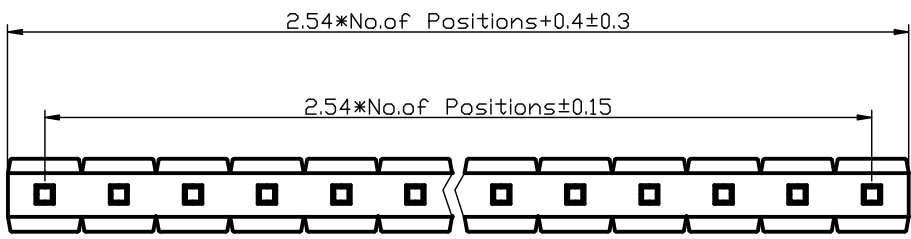


Specification

Power Pins: 3AMP
 Insulation Resistance:
 1000M Min at DC500V
 Contact Resistance: 20mΩ Max
 Insulator Resistance: 1000MΩ Min

Material

Contacts: Brass
 Standard : Gold flash all Sn Nickel
 Insulator: P.B.T UL 94V-0 Rate
 Operating Temperature:
 -40°C to 105°C

Recommended P.C.B Hole Layout

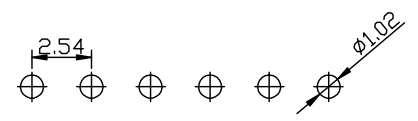

(TOLERANCE)		(DRAWN)	change
X.	±2°		
.X	±1°	.X	±0.3
.XX	±0.5°	.XX	±0.15
.XXX	±0.02°	≡ (APPROVED)	



BestLinkNetware

DRAWN BY	DATE: 2012/9/12	DESCRIPTION: pin header 2.54mm 40pin
CHECKED BY	SHEET 1 of 1	ITEM NO. 274101
APPROVED BY	SCALE 1:1	REV. 00 UNIT: mm 

1 2