


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

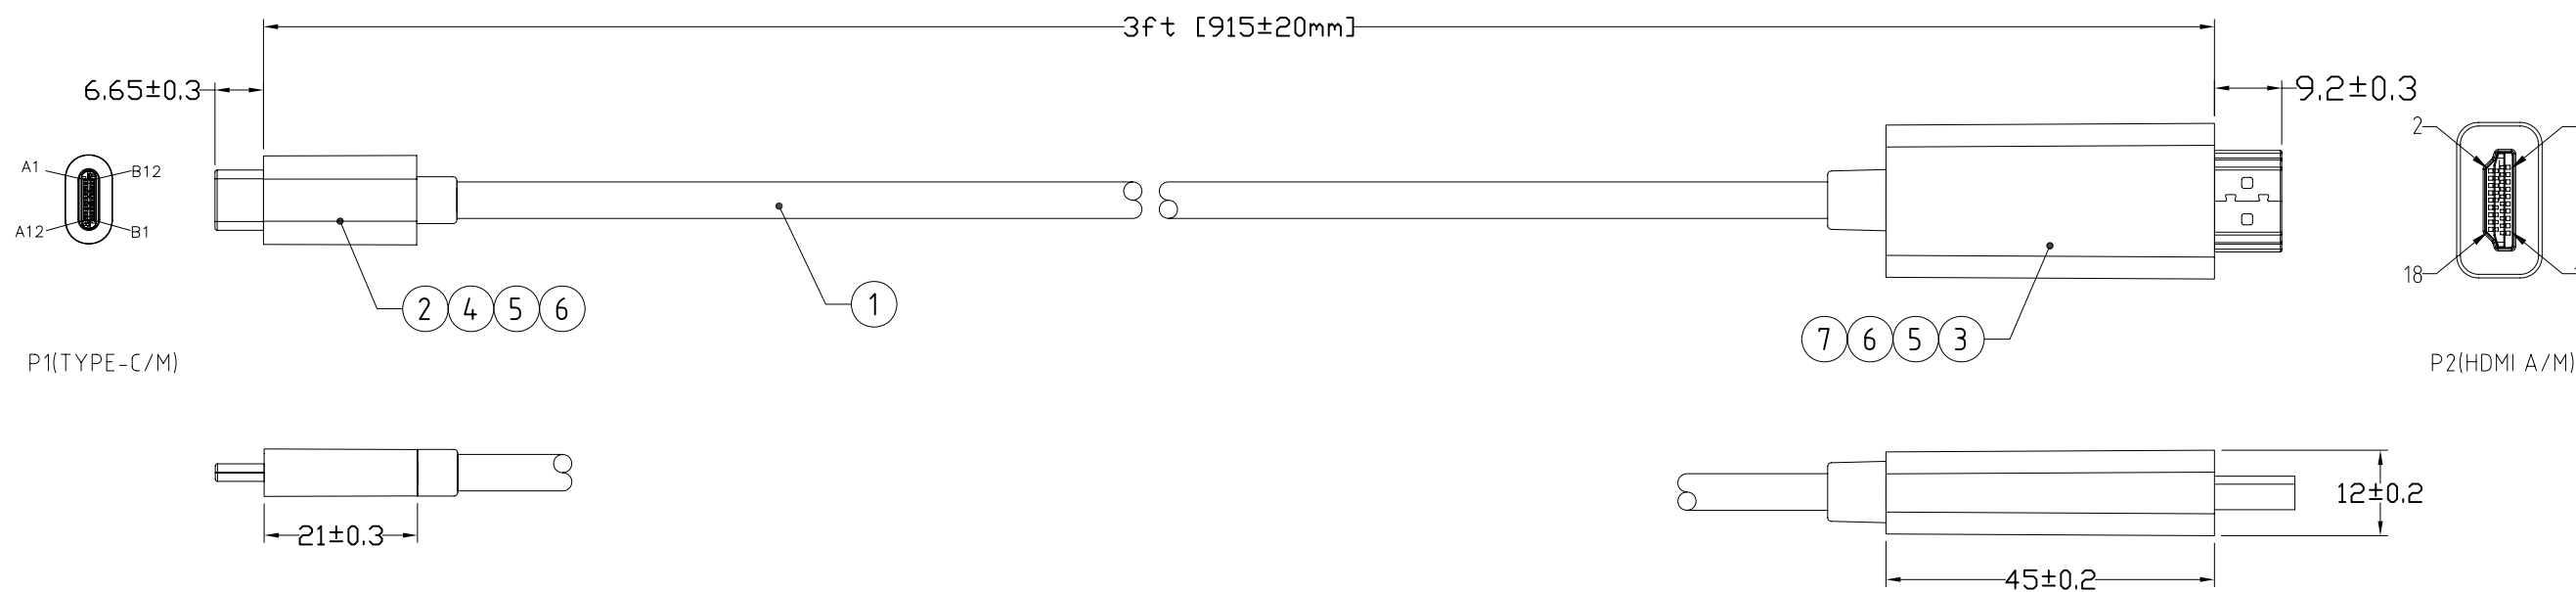


build in high performance chip:RTD2171U

Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:AC/DC 300V AT 10ms.
- 3)Insulation resistance:10M Ohm(min)
- 4)Conductive resistance:2 Ohm(max)
- 5)Support 4K@30Hz

PIN ASSIGNMENT:

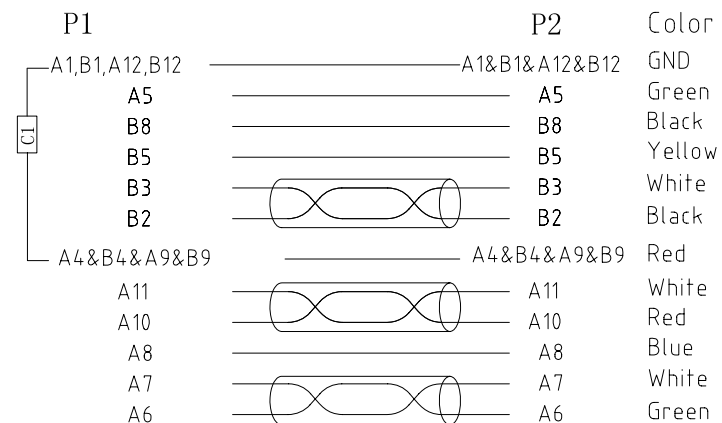

NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT
①	Cable	USB3.1 Cable (7/0.08T×1P+AL+HM)×3C+7/0.08T×4C+19/0.127T×1C+D+AL,OD:4.2mm white	-	MM
②	Conn	USB C Type Plug G/F Plated,Shell gold plated	1	PCS
③	Conn	HDMI A male Plug G/F Plated, Shell gold plated,with PCBA,CHIP:RTD2171U	1	PCS
④	Shell	TYPE-C/M 21×12.3×6.5 white ABS shell	1	SET
⑤	Shell	HDMI shell 20.3×10.7×9.2 white ABS	1	SET
⑥	Innermold	PE,Low density	N/A	g
⑦	Overmold	PVC,45Pa,white,UL94V-0	N/A	g

Unless specified on the drawing, tolerances are per the follows:



.	+1
.x	+0.2
.xx	+0.05




DRAWN BY	DATE: 2020/12/16	DESCRIPTION: USB TYPE C TO HDMI CABLE
CHECKED BY	SHEET 1of2	ITEM NO. 150212
APPROVED BY	SCALE None	REV. 0.0 UNIT:mm

NOTE: CARTON MATERIAL MUST BE A=A





REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

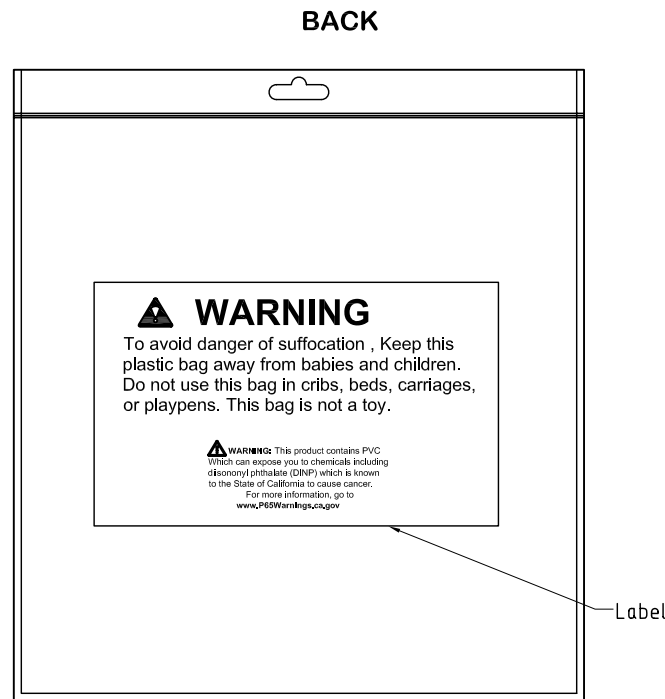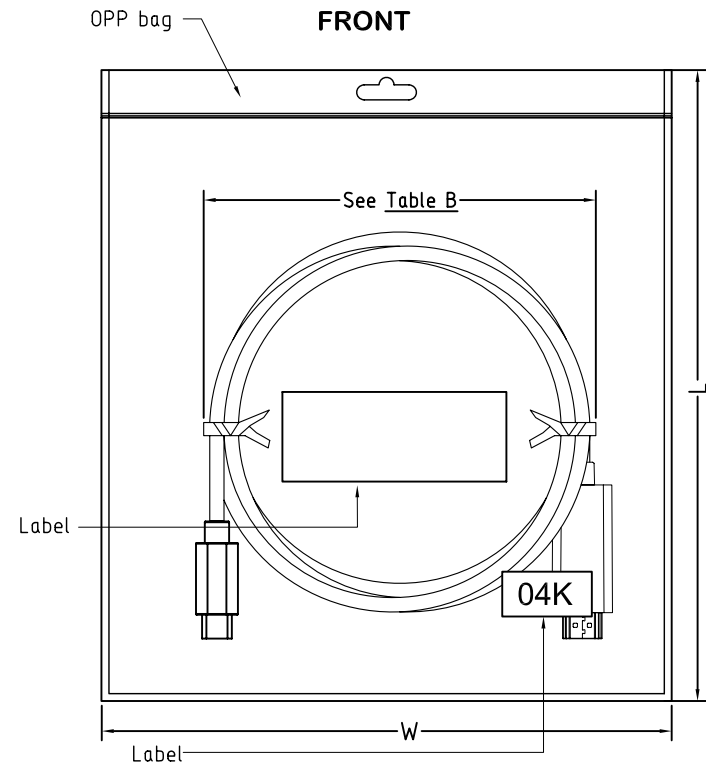

250pcs →

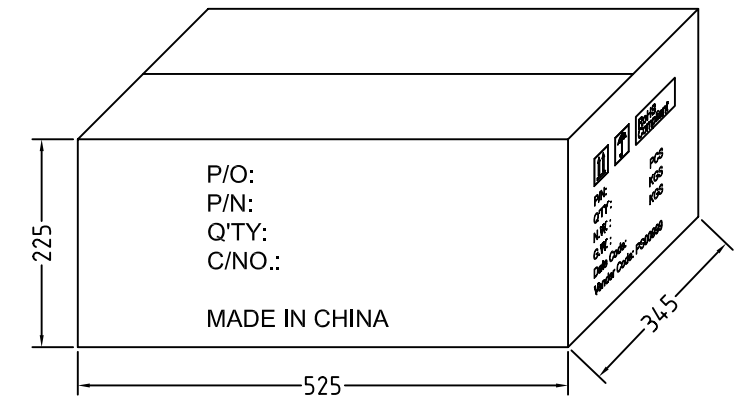

**MAIN MARK**

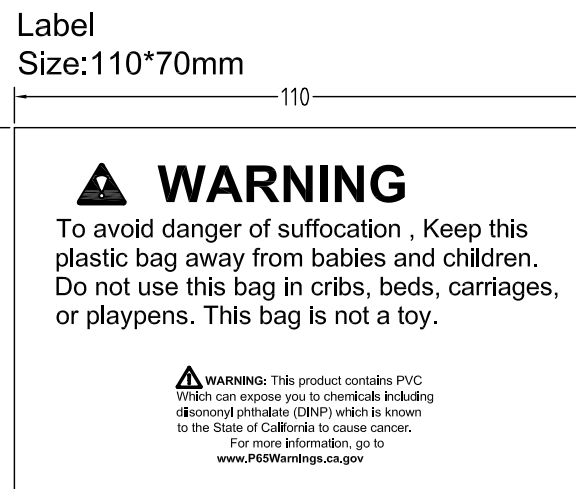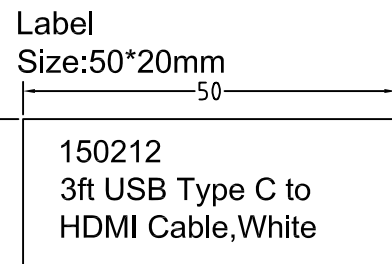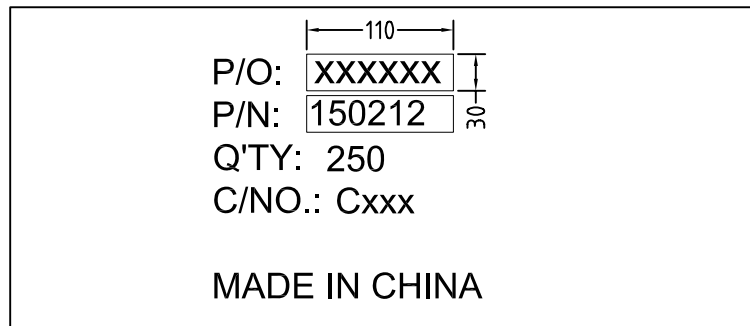


Carton Size: 20.67"(L)\*13.58"(W)\*8.86"(H)  
 Carton Quantity: xxx pcs  
 Carton Weight: xxxx LBS

**Packing Instruction:**

1. Coil the cable (see attached). Secure the cable with cable tie, and then pack each cable with an OPP bag, The label is attached to the OPP bag.
2. Seal the OPP bag ,
3. Use a waterproof bag to pack the products before going into master carton. Make sure each individual cable is staggered and positioned tidily. A paperboard is needed in both the bottom and the top of the products.
4. See shipping mark on the left.

**SIDE MARK**

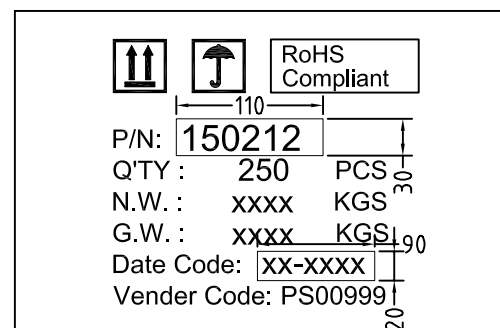

DRAWN BY	DATE: 2020/12/16	DESCRIPTION: USB TYPE C TO HDMI CABLE	
CHECKED BY	SHEET 2of2	ITEM NO. 150212	
APPROVED BY	SCALE None	REV. 0.0	UNIT:mm