


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	2014.08.05		

"L=25FT±8.0CM"

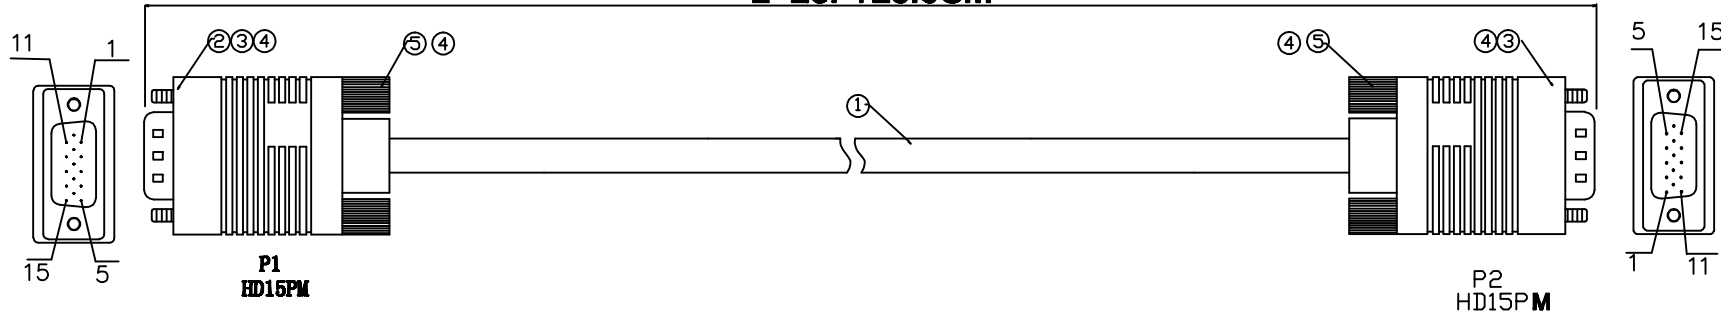

Technical Requirements

1.Electrical Characteristics:

1.1.cable must pass electrical testing, no short circuit, open circuit, indirect sexual contact, insufficient insulation, dislocation, and other electrical contact resistance of adverse circumstances

1.2 Electrical Test Conditions

Conductor Resistance: $\le 10 \Omega$
 Insulation resistance: >math>\ge 10M \Omega / 300V</math>

2.Appearance requirements:

- 2.1 No shot short.shrink, flow liner
- 2.2 Wire surface printing clear, smooth appearance, can not have scratches and obvious color
- 2.3 15PIN connector no empty pin and blunt glue
- 2.4 Terminals can not have oxidation or electrodeposited coating fall off

3.Size request



- 3.1 cable length match the drawing
- 3.2"▲" qc test according to this size

4. cable wire connect point
 view the point

5.Packing:

Circle around a single package.

Wire

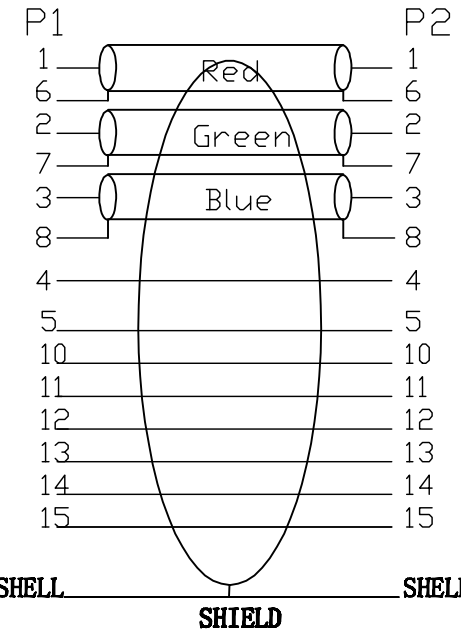

Packing

1). Material List :

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑤	SCREW	Screw2.3*4MM	4	PCS
④	Outer Molding	PVC 45P Black	NA	KG
③	PE	PE Internal Mold Material	NA	KG
②	Connector	HD15PM Blue Bobbin Nickel-Plated	2	PCS
①	Wire	(1/0.12TC*PHE*30/0.13CCA*2.5PVC)*9Coax*1/0.12TC*8C*AL*0 1/0.125C*1.25B AL*5G 009.5	25	FT



BestLinkNetware

DRAWN BY	DATE: 2014/08/05	DESCRIPTION: 25Ft SVGA Male to Male Cable	
CHECKED BY	SHEET 1 of 1	ITEM NO. 180444	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm 