


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
	2014.08.06		

" L=10FT±3.0CM"

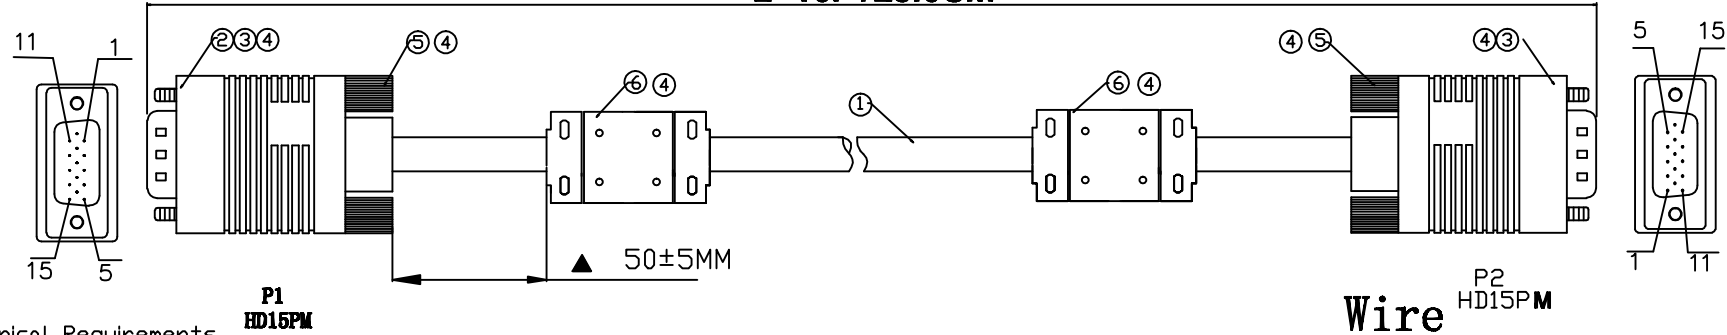

Technical Requirements

1.Electrical Characteristics:

1.1.cable must pass electrical testing, no short circuit, open circuit, indirect sexual contact, insufficient insulation, dislocation, and other electrical contact resistance of adverse circumstances

1.2 Electrical Test Conditions

Conductor Resistance: $\le 10\mu$
Insulation resistance: $\ge 10M\Omega/300V$

2.Appearance requirements:



- 2.1 No shot short,shrink, flow liner
- 2.2 Wire surface printing clear, smooth appearance, can not have scratches and obvious color
- 2.3 15PIN connector no empty pin and blunt glue
- 2.4 Terminals can not have oxidation or electrodeposited coating fall off

3.Size request

- 3.1 cable length match the drawing
- 3.2 qc test according to this size
- 4. cable wire connect point view the point

5.Packing:

Circle around a single package.

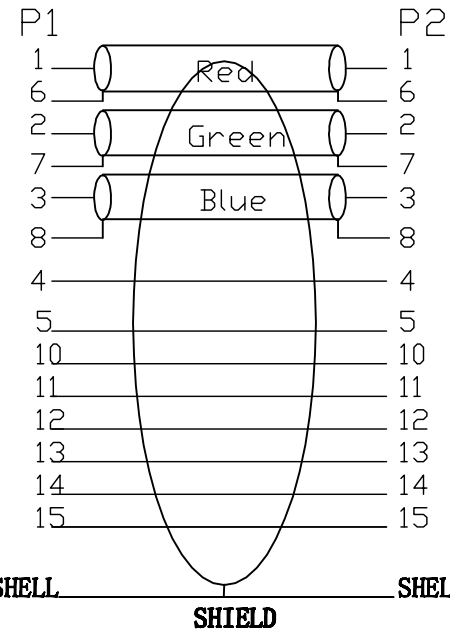

1). Material List :

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑥	Ferrite	Ferrite10.5*17.5*28.5mm	2	PCS
⑤	SCREW	Screw2.3*45MM	4	PCS
④	Outer Moulding	45P Black PVC(ROHS)	NA	KG
③	PE	PE Internal Mold Material	NA	KG
②	Connector	HD15PM Blue Bobbin Nickel-Plated	2	PCS
①	Wire	(7/0.12TC+PIPE+30/0.12CCA+2.5PVC)+3Coax+7/0.12TC+8C+AL+D 7/0.12BC+128B AL-16 008.5	10	FT



DRAWN BY	DATE: 2014/08/06	DESCRIPTION: 10R SVGA Male to Male Cable w/Ferrite Core	
CHECKED BY	SHEET 1 of 1	ITEM NO. 180456	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm