
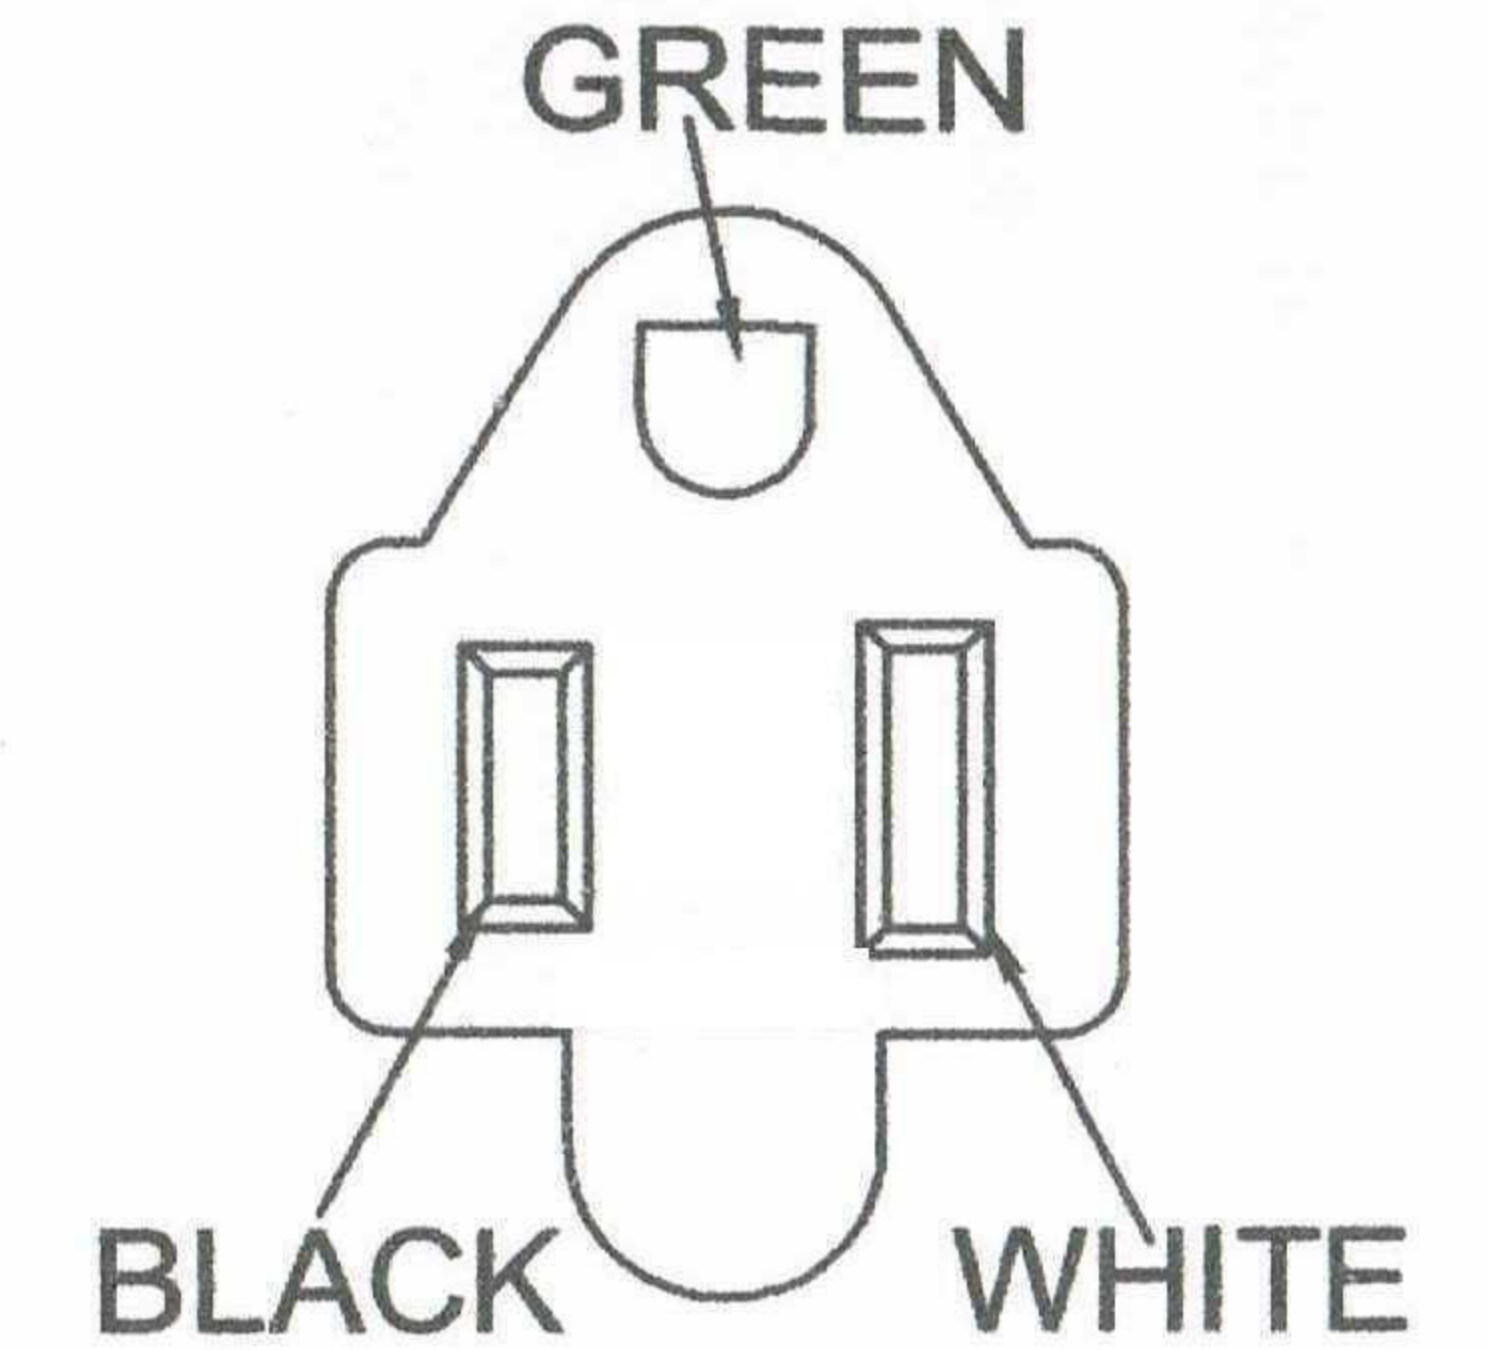



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

| Rev. | Rev. Date | Modified By | Brief Description |
|------|------------|-------------|-------------------|
| | 2016-01-16 | zhang | Mark cable |

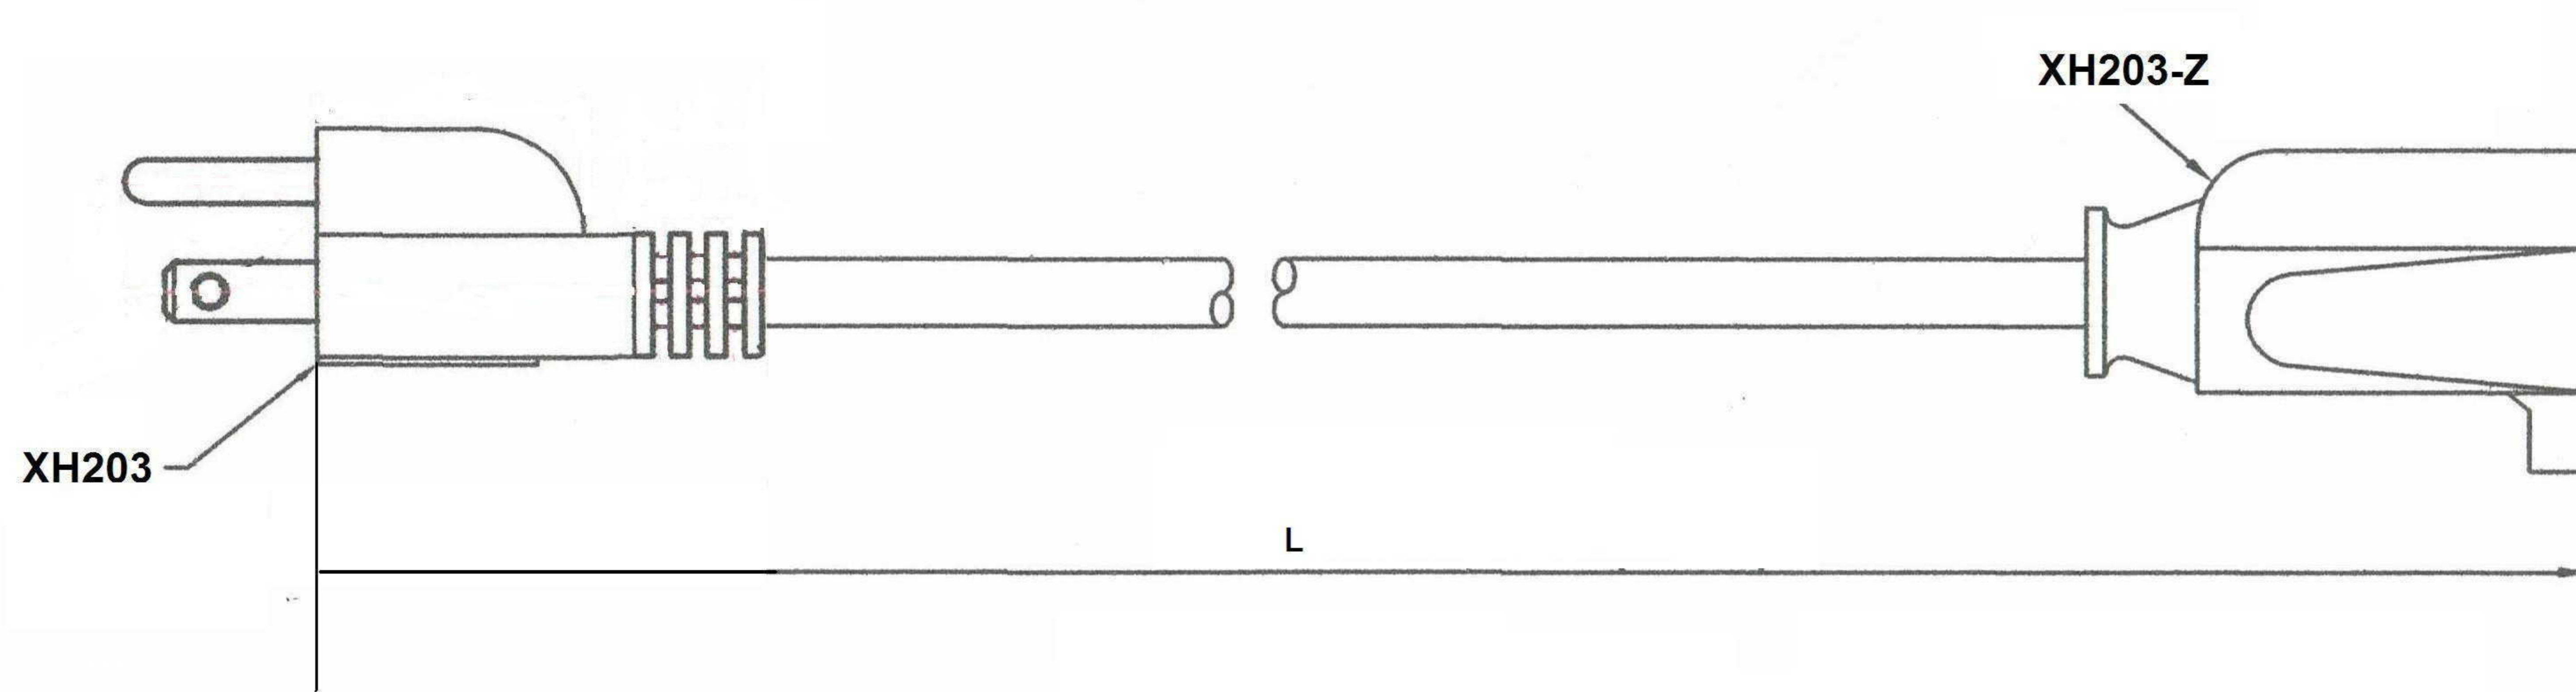

XH203-Z
XUANHUA
E257089

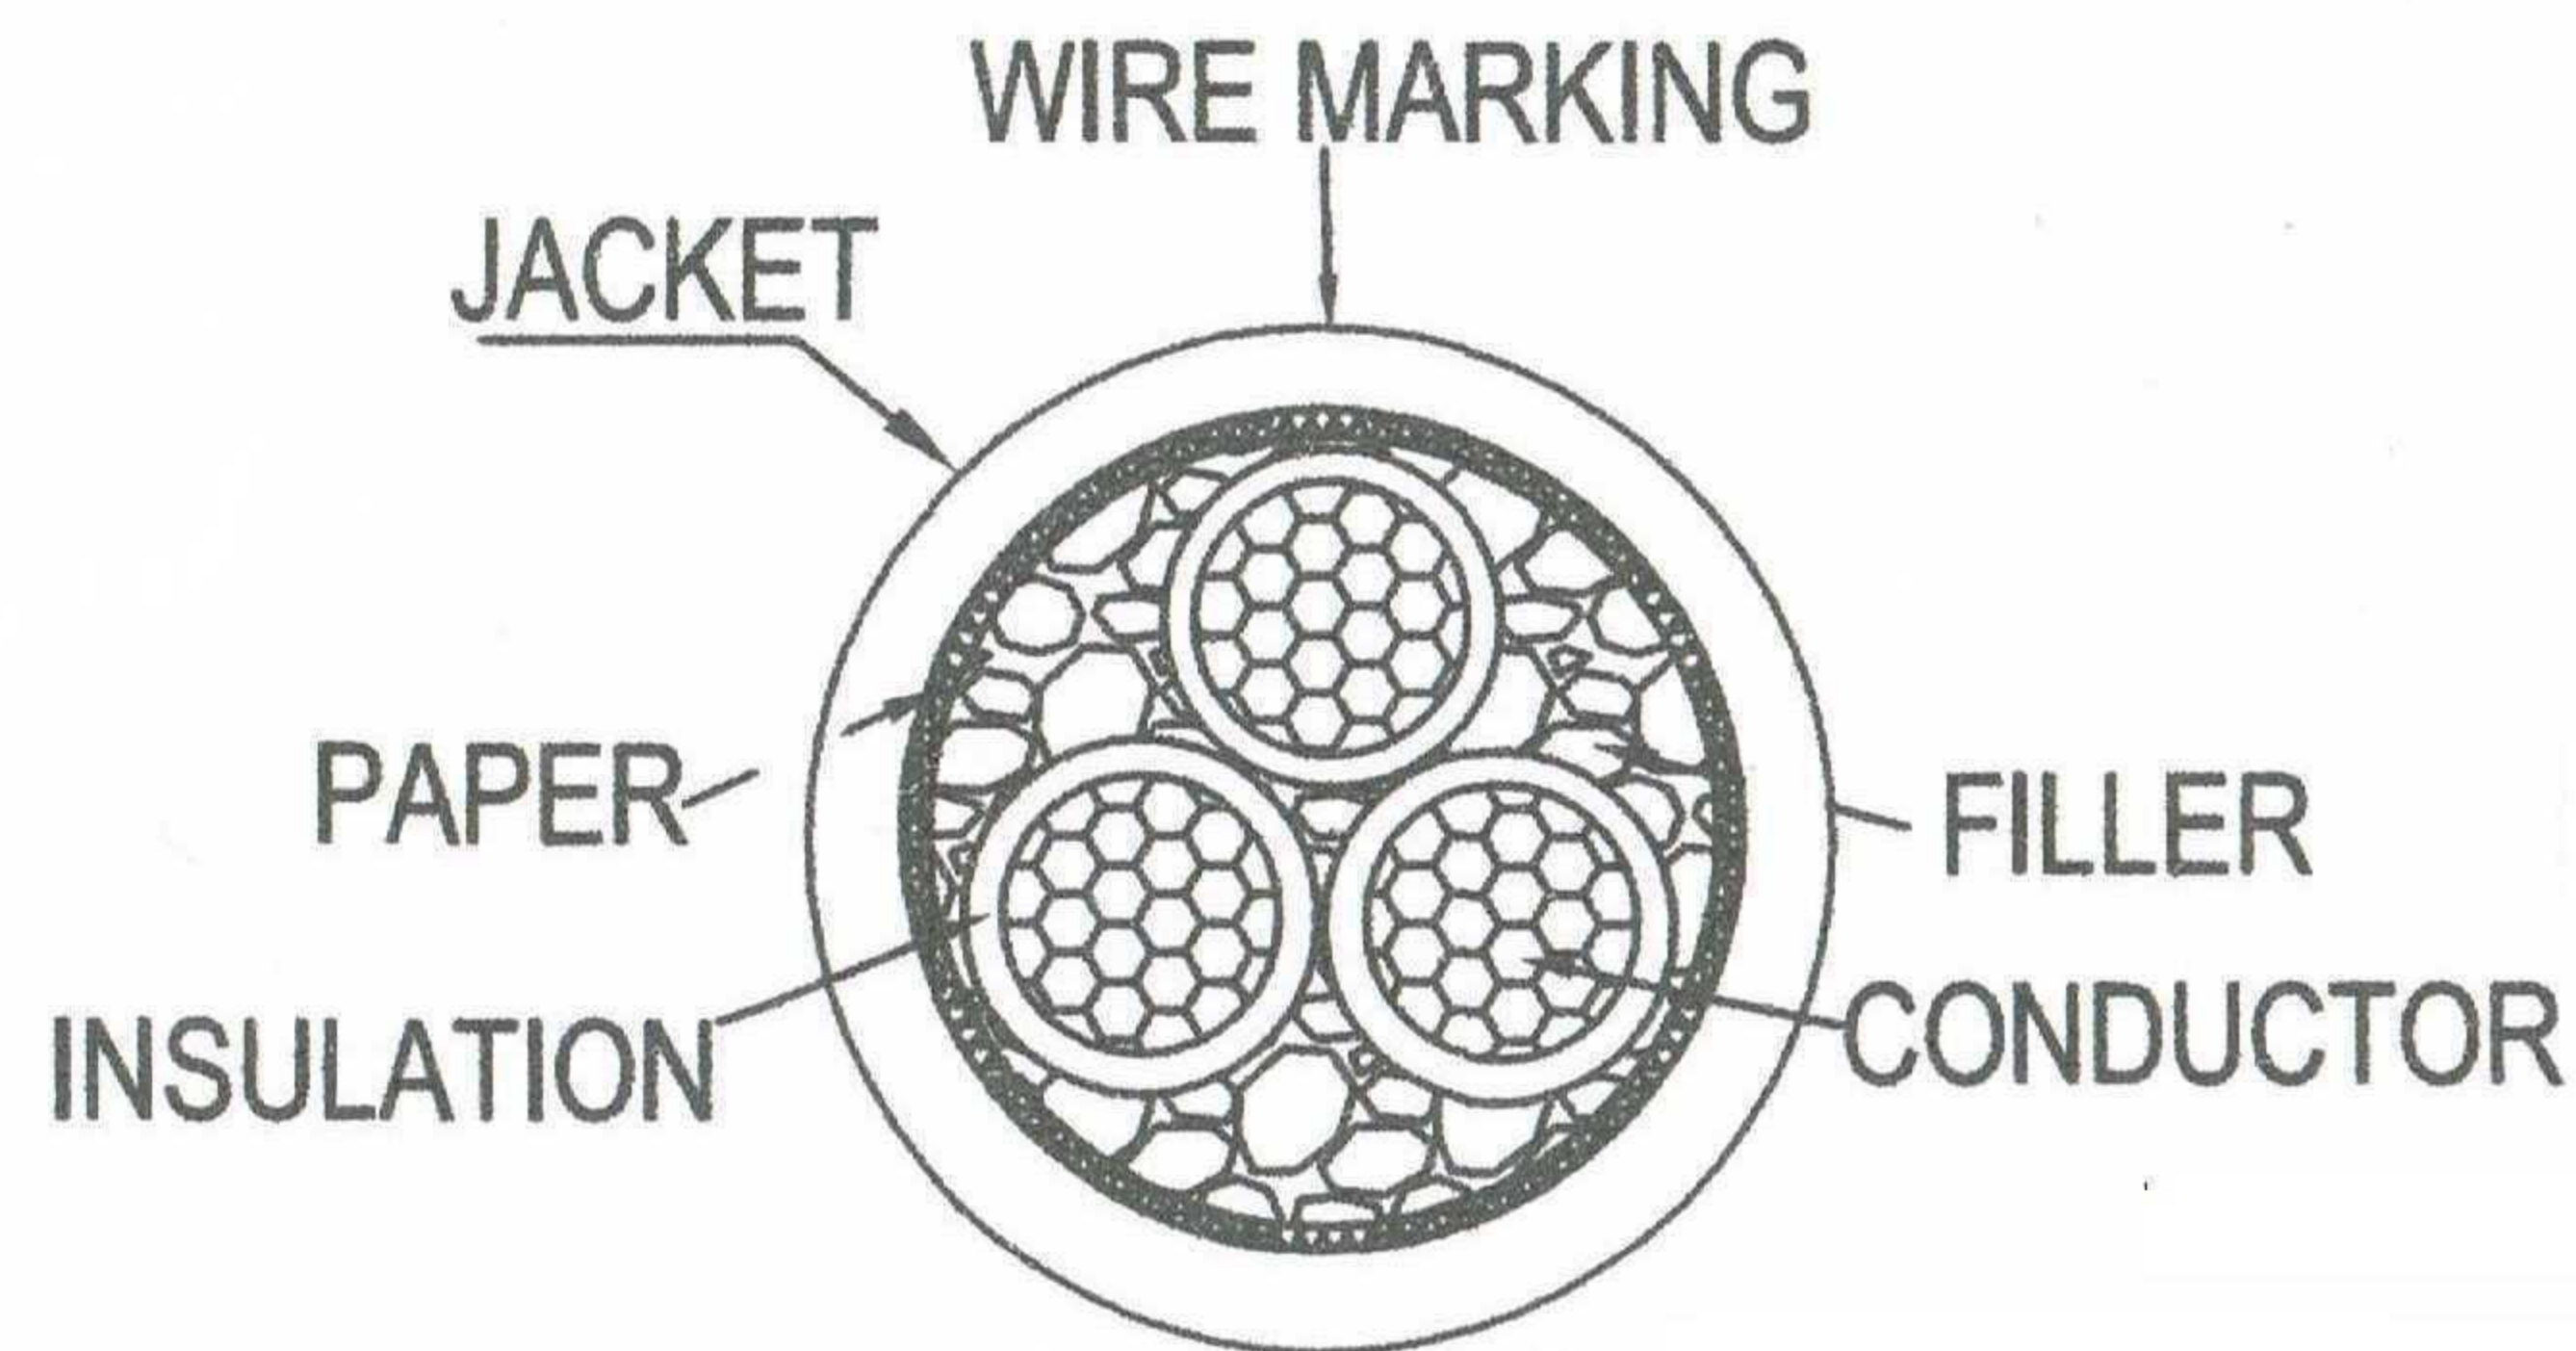

| WIRE MARKING: (Hollow) | | UL c(UL) SJT 3C 16 AWG(1.31mm ²) 60C VW-1 300V E313867 100030-765 FT1 NINGBO XUANHUA | | | | | |
|----------------------------------|--|--|----------|---------------|-----------|-----------|------------------|
| Conductor | | Insulation | | | Jacket | | Overall diameter |
| AWG | | Min.Thick | Diameter | Length of Lay | Min.Thick | AVG.Thick | |
| 16AWG 26/0.25 | | | | | | 0.76mm | 8.6+-0.2mm |

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)



| Item No | Length (ft) | T (inche) |
|----------|-------------|-----------|
| 210159BK | 1 | ±0.79 |
| 210160BK | 3 | ±0.79 |
| 210321BK | 6 | ±0.79 |
| 210322BK | 10 | ±0.79 |
| 210323BK | 15 | ±0.79 |
| 210324BK | 25 | ±0.79 |

| | | | |
|--------------------------|----------------------------|---|----------|
| DRAWN BY: FENG | DATE: 2016-01-21 | DESCRIPTION: POWER CORD 5-15P TO 5-15R BLACK SJT 16/3 | |
| CHECKED BY: ZHANG | SHEET 1 of 1 | ITEM NO. | |
| APPROVED BY | SCALE 1:1 | REV. 00 | UNIT: mm |