

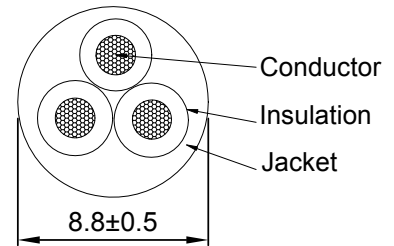




VERSION INFORMATION (Vender)			
Rev.	Rev. Date	Modified By	Brief Description
V1	2021.10.18	XYH	Initial Issue

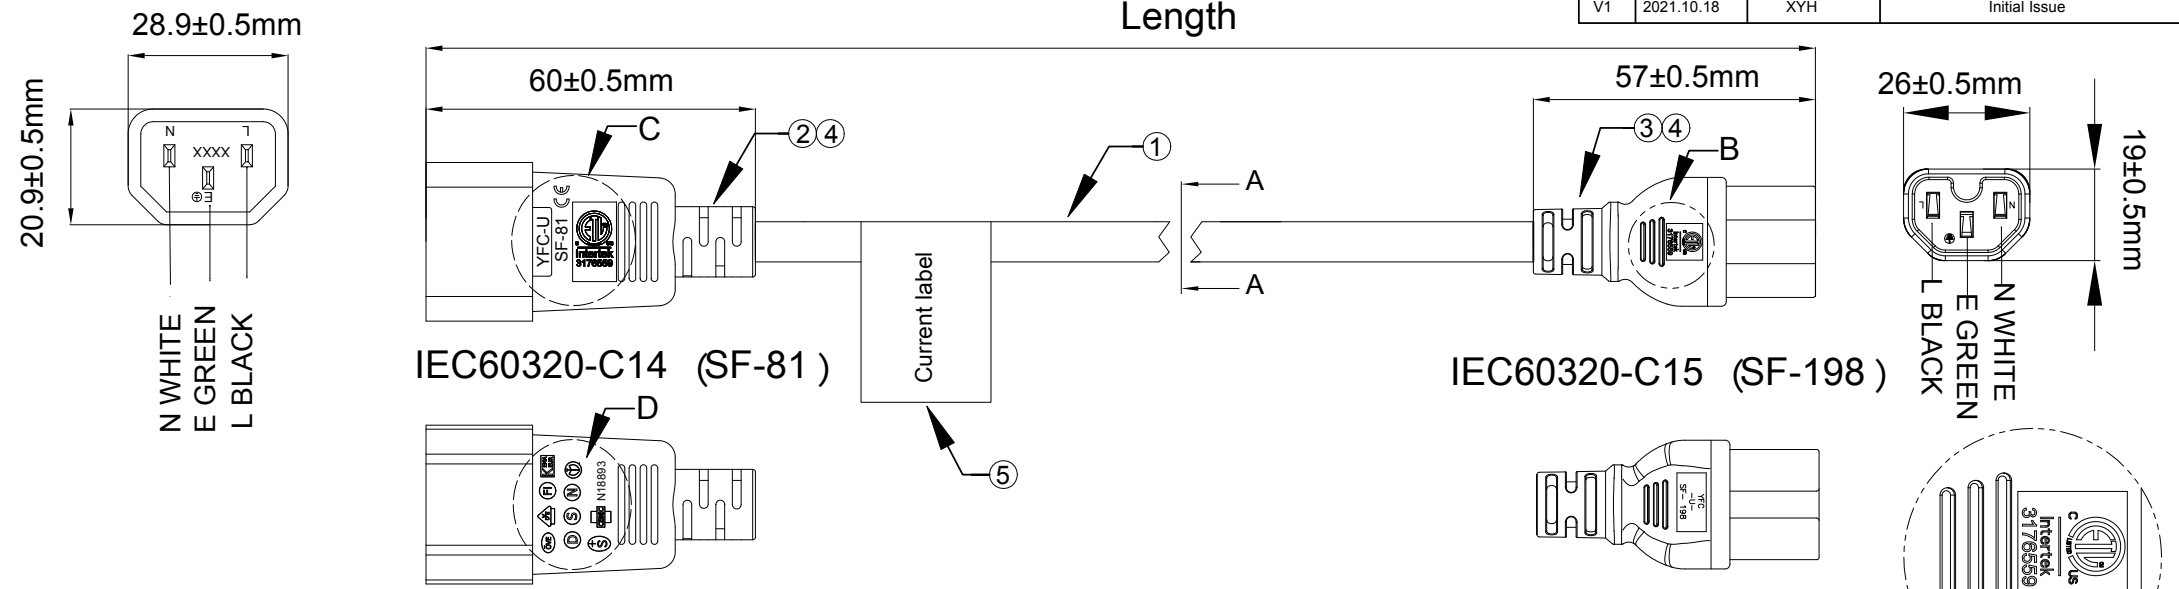

WIRE MARKING(N0.702):  
 (ETL)US 3176559 SJT 3 X 14AWG 105°C 300V VW-1  
 C(ETL) SJT 3X2.08 mm<sup>2</sup> (14AWG) FT2



B  
3:1

Polarity and Continuity Test	
Dielectric Voltage Withstand Test :1500V /1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor resistance	≤ 9.06Ω/1000m
Voltage Rating	AC 300V

Pinout		
IEC60320-C14 (SF-81)	Wire	IEC60320-C15 (SF-198)
E	GREEN	E
N	WHITE	N
L	BLACK	L



NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑤	Current label	C (ETL) US General Use Cordset Indoor label 15A 125V	1	PC
④	Molding	White PVC 40P	AR	G
③	Terminal	C15Terminal Brass Natural color and Bracket, With 18-14AWG	1	PC
②	Terminal	C14Terminal Brass Natural color and Bracket, With 18-14AWG	1	PC
①	Cable	SJT 14AWGx3C 105°C	1	PC

APPROVED BY PM & DATE :		DESCRIPTION : Power Cable - IEC 60320 C14 to IEC 60320 C15, 14AWG, 15A, SJT, 100-250V,			
PM PRINT NAME :		DATE : 2021.10.18			
		UNIT : MM	SHEET : 1 OF 4	FILE NAME : PID_PRODUCT	