
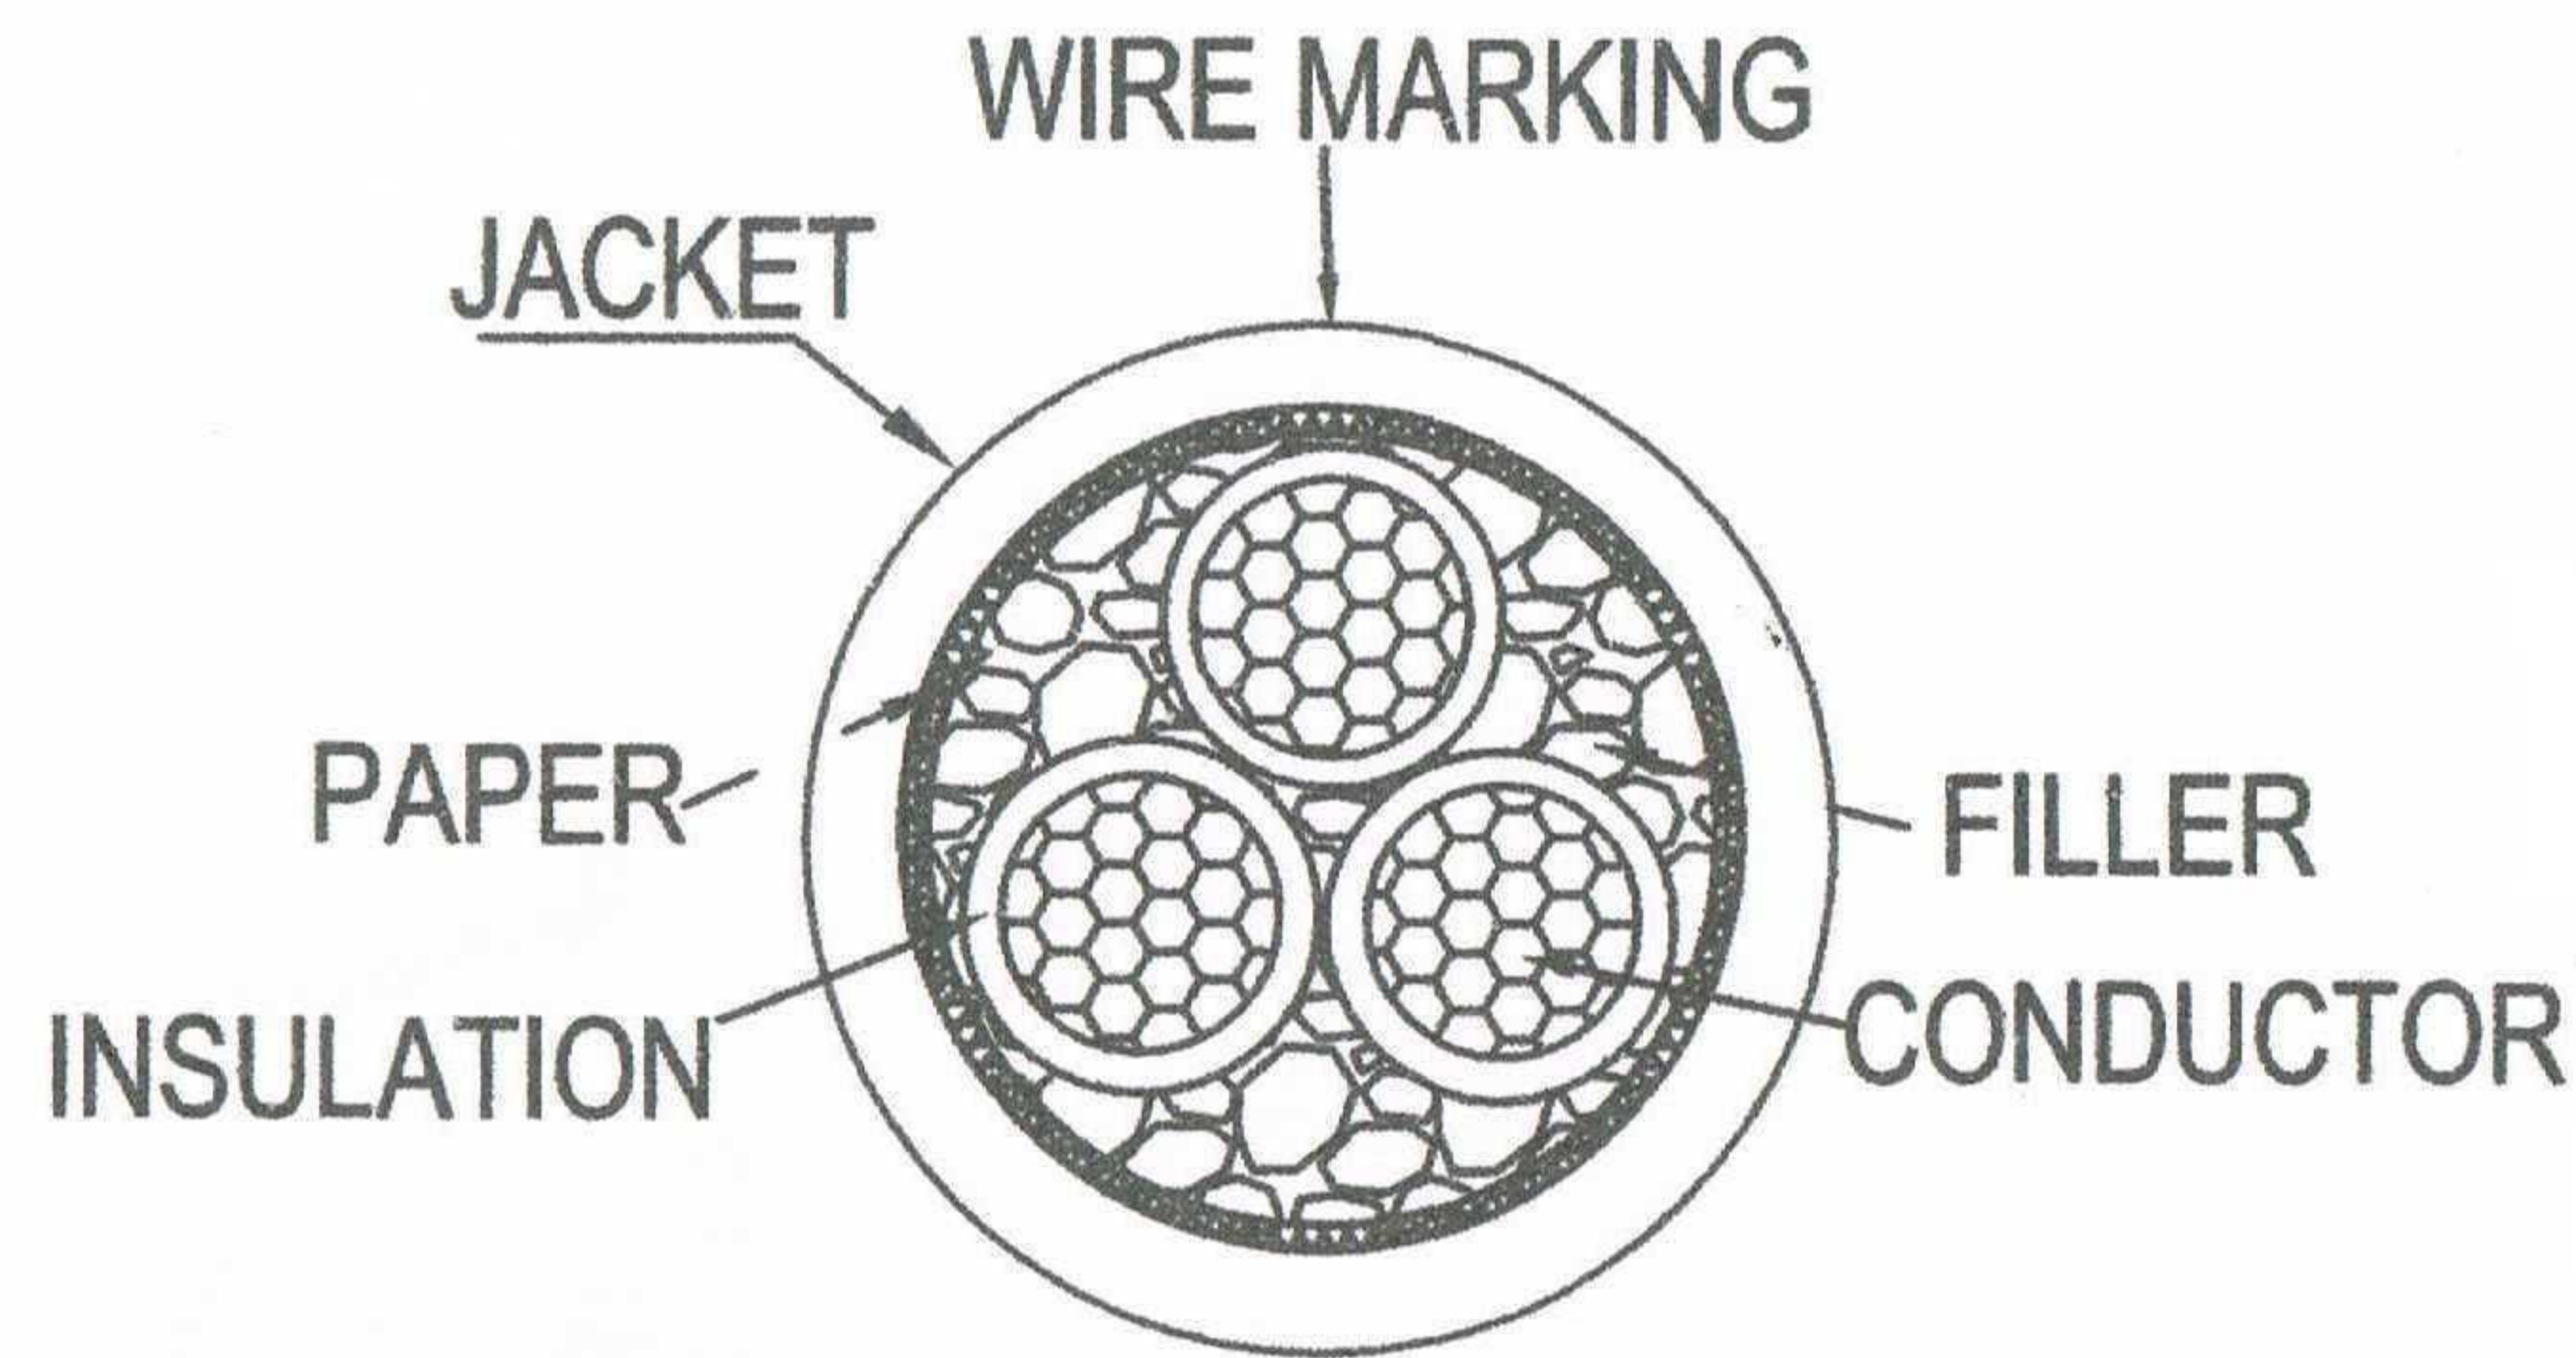


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
	01-18	zhang	cable mark SJT14AWG*3C

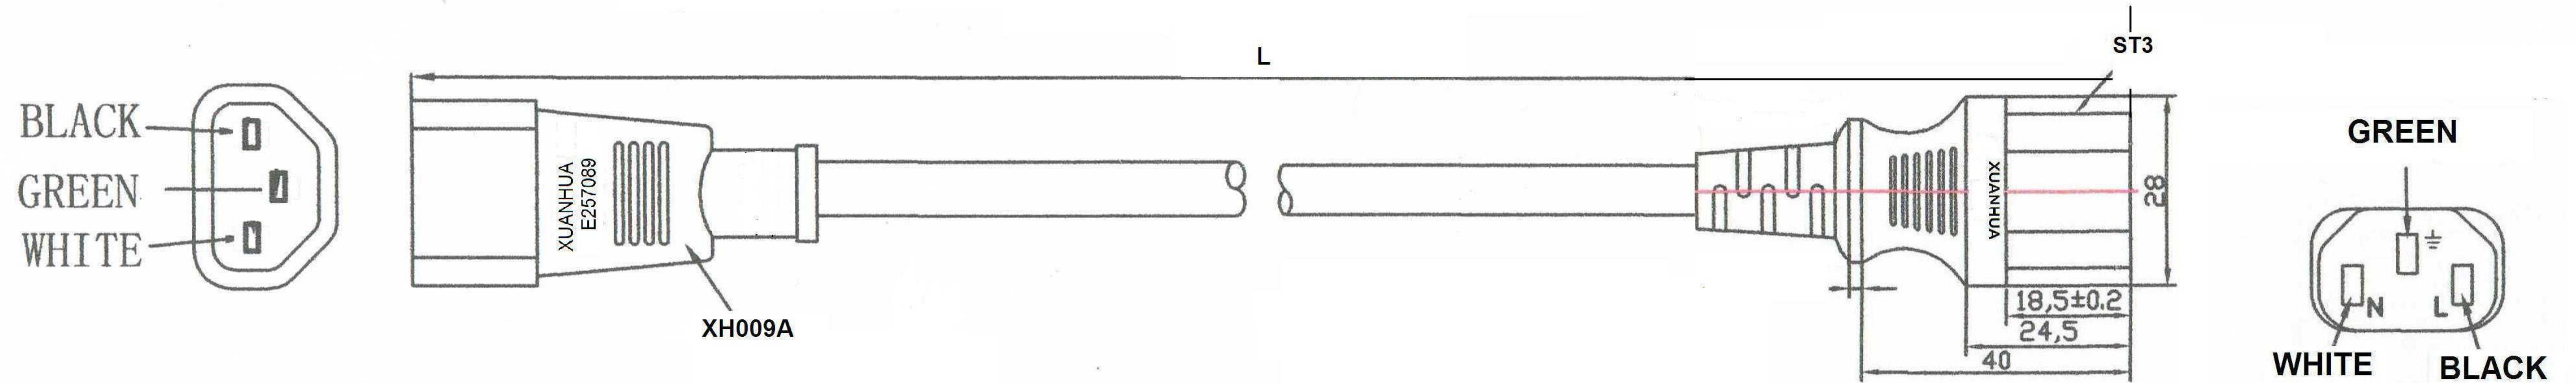

WIRE MARKING: (Hollow)		UL SJT 14AWG*3C 60C 300V VW-1 E313867 100030-765 * C(UL) SJT 3/C 14AWG(2.08mm ²) 60C 300V FT1 NINGBO XUANHUA		
Conductor		INSULATION THICKNESS (mm)	Jacket	
AWG		0.76	AVG.Thick	Overall diameter
14/3 41/0.25			0.76mm	9.4±0.2mm

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)

ELECTRIC TESTING:

- 1.100% OPEN&SHORT TESTING
- 2.VOLTAGE RATING:AC>=1500V/S
- 3.PLUG(XH202)RATED POWER:
125V 10A UL-E257089
- 4.PLUG(XH006A)RATED POWER:
125V 10A UL-257089
- 5.WIRE:SVT 18/3 RATED POWER PVC
- 6.COLOR: BLACK

Item No	Length (ft)	T (inche)
210354BK	1	±0.79
210340BK	3	±0.79
210341BK	4	±0.79
210342BK	6	±0.79
210355BK	8	±0.79
210356BK	10	±0.79
210357BK	12	±0.79



DRAWN BY: FENG	DATE: 2016-01-21	DESCRIPTION: POWER CORD C20 TO C13 BLACK SJT 14/3	
CHECKED BY: ZHANG	SHEET 1 of 1	ITEM NO.	
APPROVED BY	SCALE	REV. 00	UNIT: mm