

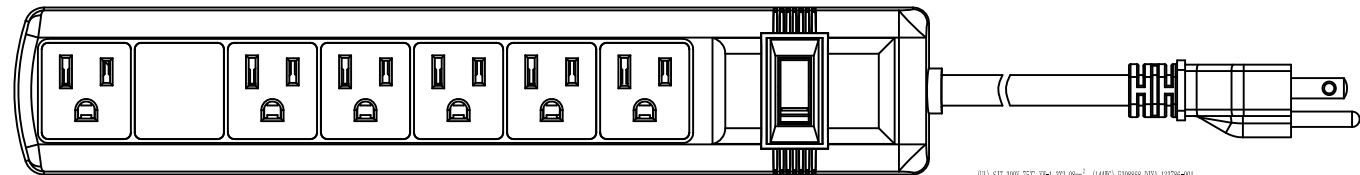



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

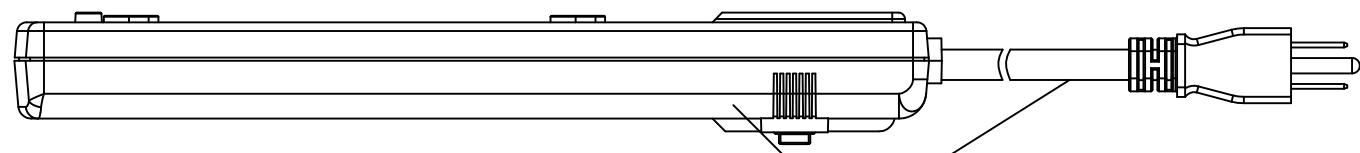

(U) SJT 3007 75°C 1Y-1 302.08mm² (14AWG) E308888 DTEL 133786-01



plastic housing color:white

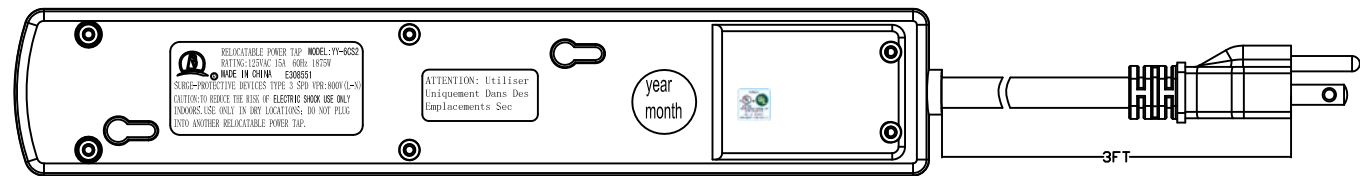

RELOCATABLE POWER STRIP MODEL:YI-6052
 RATING:125VAC 15A 60Hz 1875W
 MADE IN CHINA E308551
 SURGE-PROTECTIVE DEVICES TYPE 'S' SPD VSR:8000V(1-A)
 CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK USE ONLY
 INDOORS. USE ONLY IN DRY LOCATIONS; DO NOT PLUG
 INTO ANOTHER RELOCATABLE POWER STRIP.

ATTENTION: Utiliser
 Uniquement Dans Des
 Emplacements Sec

year
 month

3FT

requirements:

1. hi-pot testing.
2. internal checking.
3. polarization checking.
4. grounding continuity testing.



DRAWN BY		DATE: 2012/09/08	DESCRIPTION: 6Ft 6- Outlet Purpendicular Power Strip	
CHECKED BY		SHEET 1 of 1	ITEM NO. 215012	
APPROVED BY		SCALE	REV. 00	UNIT: mm

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				