

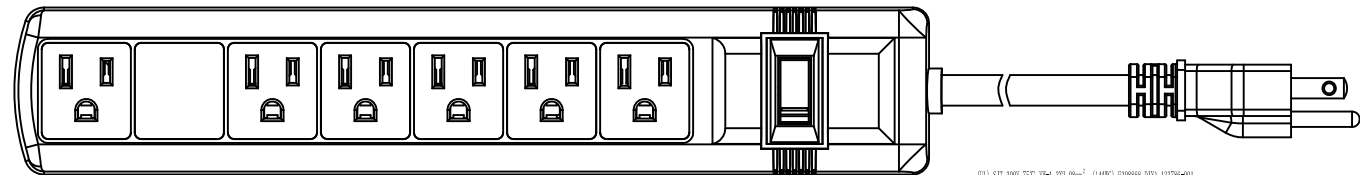
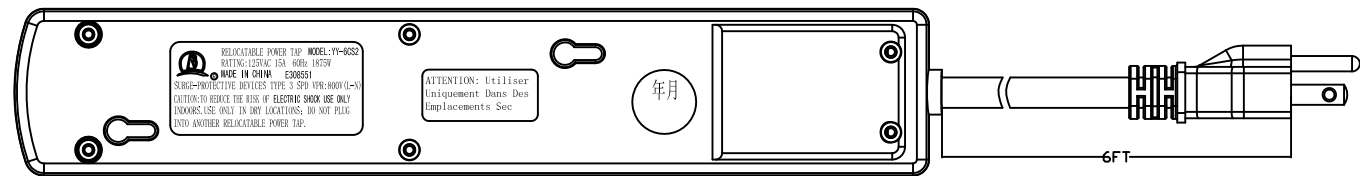



NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

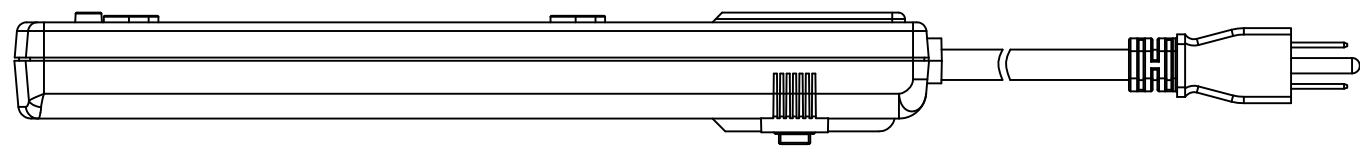

(U) SJT 3007 75°C 1Y=1.922.08mm² (14AWG) E308888 DTEL 133728-01



6FT

RELOCATABLE POWER TAP MODEL:YT-6052
 RATING:125VAC 15A 60Hz 1875W
 MADE IN CHINA E308551
 SURGE-PROTECTIVE DEVICES TYPE S SPD USP:8000V(1-A)
 CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK USE ONLY
 INDOORS. USE ONLY IN DRY LOCATIONS; DO NOT PLUG
 INTO ANOTHER RELOCATABLE POWER TAP.

ATTENTION: Utiliser
 Uniquement Dans Des
 Emplacements Sec

年月


NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				



BestLinkNetware

DRAWN BY	DATE: 2012/09/08	DESCRIPTION: 6Ft 6- Outlet Purpendicular Power Strip
CHECKED BY	SHEET 1 of 1	ITEM NO. 215059
APPROVED BY	SCALE	REV. 00
UNIT: mm		

Product Specification

Item no	215059	Description:	6 Outlet Power Strip with Transformer with Surge
Photo(s)		Color	Indent Marking based on cULus or equivalent standard
		Grey	(ETL)us ETL#____SJT 3X14AWG 60°C 300V VW-1 c(ETL) SJT 3X2.08mm2 (14AWG) FT2
		Raw Material	
		Plastic: ABS 150g	
		Copper Strip:21.5g	
Key Features & Specs		ON/OFF Swith: with Light	Compound Requirement
Male Blades:UL CUL Recognized Components(NEMA-5-15P) Female Contacts:UL CUL Recognized Components(NEMA-5-15P) Female Ground:UL CUL Recognized Components(NEMA-5-15P) Label:UL CUL required Agency Approvals:ETL Listing Rate: AC 15A 125V 60Hz 1875W Maximum Surge: 7000Amp,6000V,90J		Cabel: 3C SJT 14AWG 6FT	PVC 60°C Insulation Compound Approved for SJT Cable
		Jacket Construction	Cold Bend Test Requirement
		100% Fully Pressure Extruded Jacket	Must pass cold bend test at -20°C
Test			
Hipot test @1.5KV Power test @ with light can light Drop test @70cm Grounded test@ with ground equirement			
ETL file #	UL file #	CSA/UL file #	
	E308551		Date: 2011.11.15