



DATE	REV	DESCRIPTION	BY	CHKD

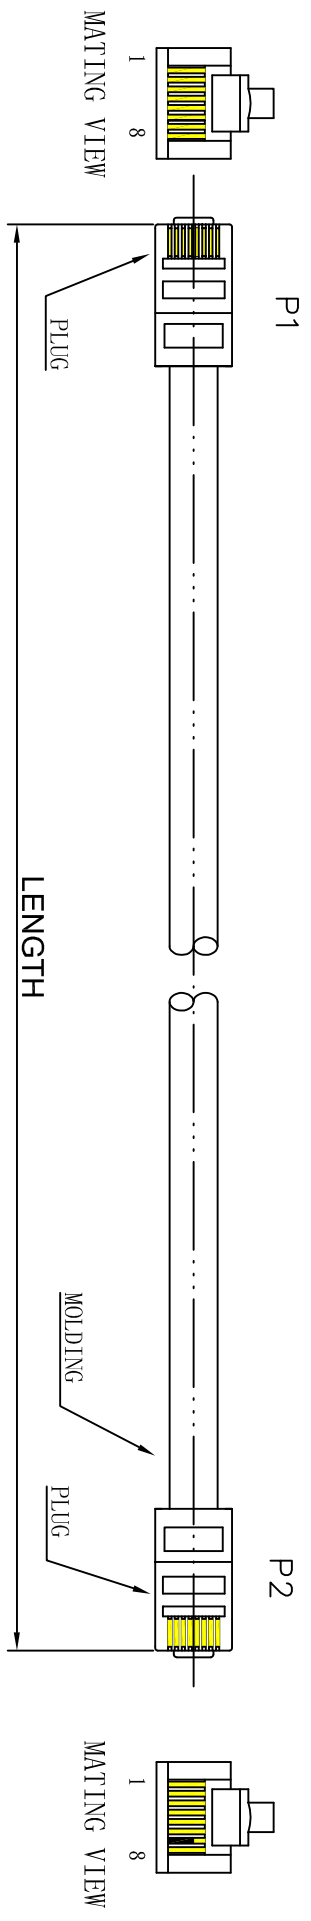


Marking: <LP713> 350MHZ CAT.5E E153116 UTP 24AWG 4PR 75 °C CMP (UL) C(UL) ETL VERIFIED TO TIA/EIA-568-B.2
RoHS COMPLIANT

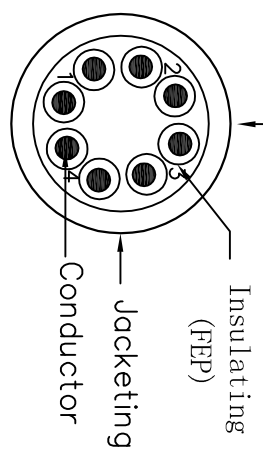

orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

Conductor	Bare Copper 24AWG 1/0.517±0.008mm
Insulation	Thickness:MIN at any point:0.1mm MAX AVG:0.3mm Diameter:0.91±0.06mm
Jacketing (CMP)	Thickness:MIN at any point:1.0mm MAX AVG:0.5mm Diameter:5.1±0.2mm

WIRE	CAT.5E UTP CMP 24AWG*4P
PLUG	8P8C 50U
Length	XXFT
COLOR	XX

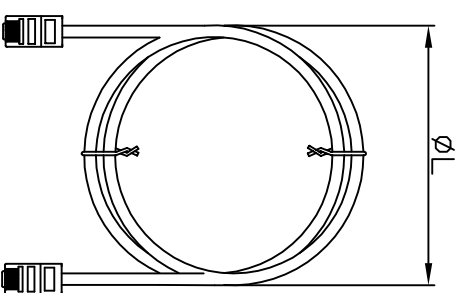

Unless specified on the drawing, tolerances are per the follows:

.X	± 1
.XX	± 0.2
.XX	± 0.05

PA/R	PINOUT			
	P1 (T568B)	WIRE	P2 (T568B)	
1	1	WHT/ORG	1	1
	2	ORG	2	2
2	3	WHT/GRN	3	3
	6	GRN	6	6
3	4	BLU	4	4
	5	WHT/BLU	5	5
4	7	WHT/BRN	7	7
	8	BRN	8	8

3RD		
DRAW. NO	ITEM	10000XXX
DEPARTMENT	DRAW	ZHD
SCALE	CHECKER	DATE
UNIT	MM	SHEET
		1 OF 1

2008/07/21