
NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

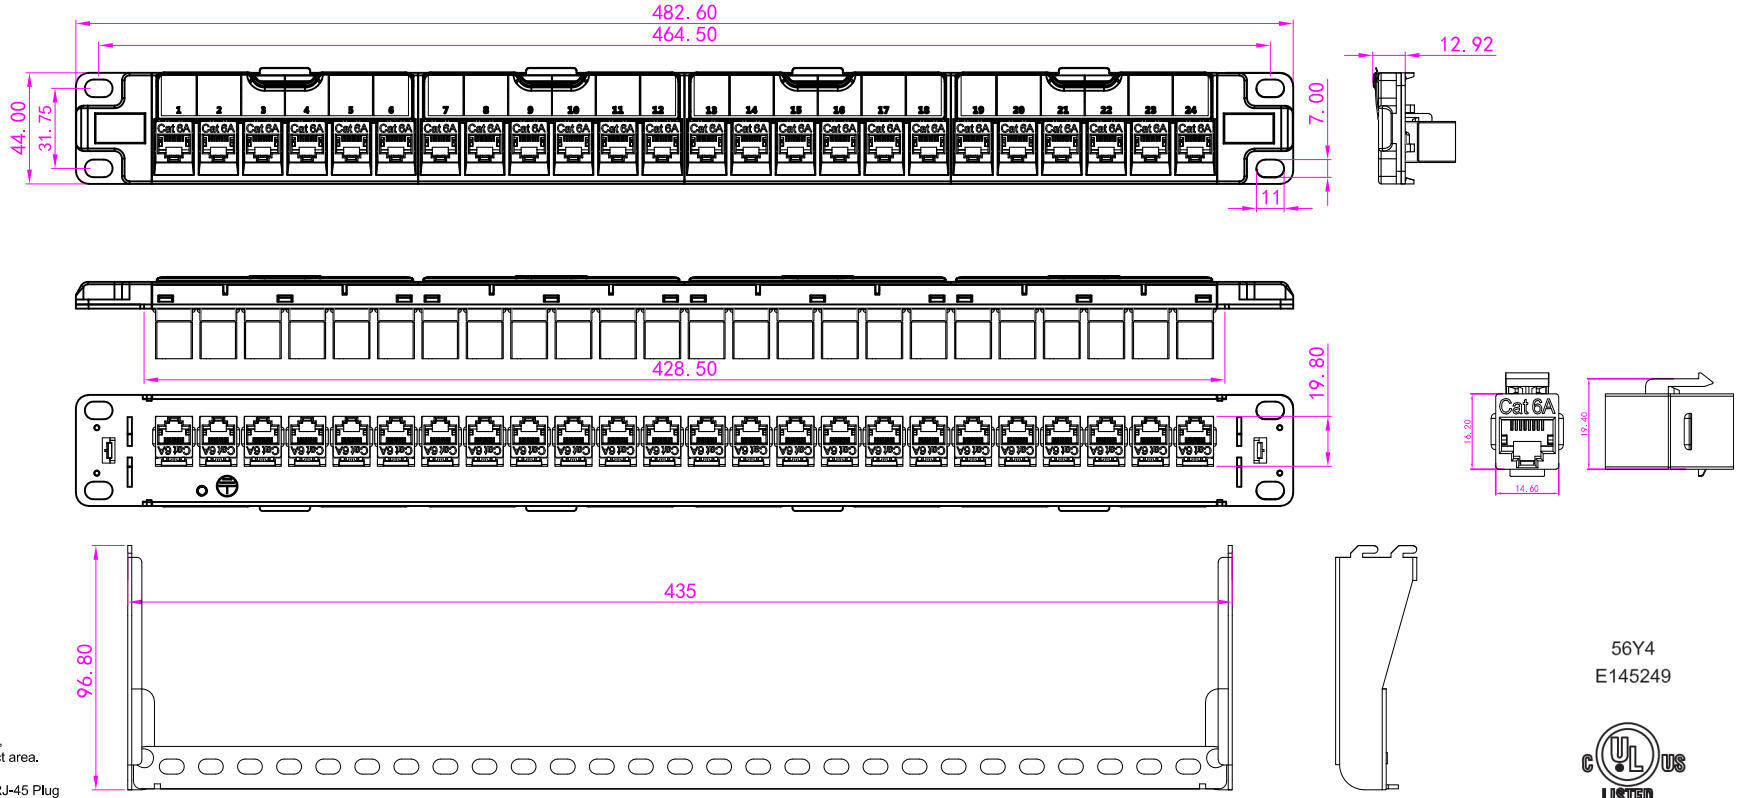

Physical Specification
Panel: Spcc
Jack Housing: PC UL94V-0
Spring PIN:Phosphor Bronze .Plating Nickel undercoat, besides Plating Gold over the plated surface on contact area.
PIN Holder: PC UL94V-0 PCB: FR-4
Insertion Life: 750 Mating Cycles with FCC Compliant RJ-45 Plug
Contact Force: 100 Grams With FCC Compliant RJ-45 Plug
Plug Retention Force:11 Lbf Min
Operating Temperature Range:-10℃ to 60℃
Storage Temperature Range:-40℃ to 68℃
Humidity:10%~90%RH
Electrical
INSULATION RESISTANCE: ≥500MΩ
DIELECTRIC WITHSTAND TEST: 1000V DC OR A.C .PEAK
DC CURRENT: 1.5AMPS
(UTP)DC IMPEDANCE: ≤200MΩ
CONTACT RESISTANCE: ≤20mΩ

The Rj45 Series Port Meets The Requirements Of International Standards, And Its Technical Performance Meets TIA/EIA568 C6A Standards. Meet The Usage Environment Of 15-90 Meters

56Y4
E145249

c UL us LISTED
COMMUNICATION CIRCUIT ACCESSORIES

RoHS

NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT
④				
③	Accessory Package	NYLON CABLE TIE	24	PCS
②		Screw (M6X12±0.5) mm*4 + Gasket *4	8	PCS
①	Panel bracket	T435A	1	PCS

Unless specified on the drawing,tolerances are per the follows:
. +1
.x +0.2
.xx +0.05

BESTLINK NETWARE

DRAWN BY ZJJ	DATE: 2026.08.19	DESCRIPTION: Cat.6A UTP 180° In-Line Keystone Couplers 24 port Rackmount with Removable Back Bar UL Listed
CHECKED BY	SHEET 1 of 1	ITEM NO. 102203
APPROVED BY	SCALE 1:1	REV. 00 / UNIT: mm