


End A

End B

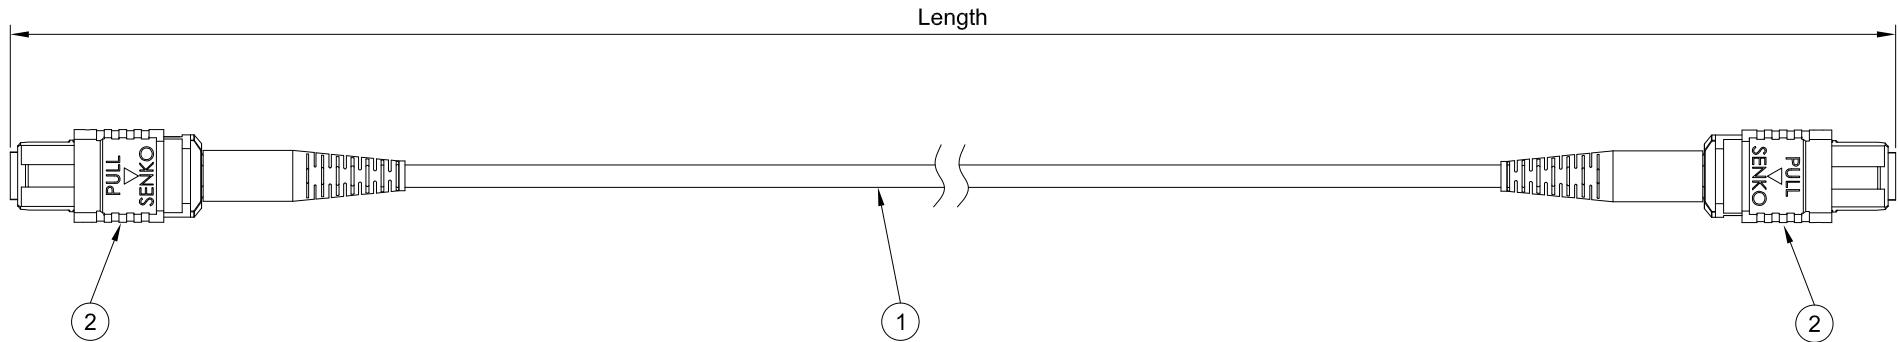

Performance:

1. MPO/PC: IL≤0.5dB,RL≥35dB(@850nm).

Note: Multi mode length≤3M, return loss not tested.

2.Storage or transportation: -20~70℃

3.Operation: -20~70℃

4.Installation: -0~50℃

5.Optical cable printing content:

MICRO CABLE OPTICAL FIBER CABLE 12x50/125 OM3 ROHS COMPLIANT


0051 XXXXXX(serial number) OFNR (UL) E361917 0000M

End A

Position	Fiber Color
1	Blue
2	Orange
3	Green
4	Brown
5	Grey
6	White
7	Red
8	Black
9	Yellow
10	Purple
11	Pink
12	Aqua

End B

Position	Fiber Color
1	Aqua
2	Pink
3	Purple
4	Yellow
5	Black
6	Red
7	White
8	Grey
9	Brown
10	Green
11	Orange
12	Blue

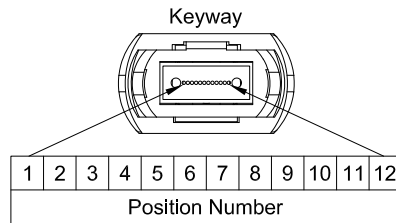

Item	Length	Tolerance
/	1m	+100mm/-0
105542	3m	+100mm/-0
105543	5m	+100mm/-0
/	10m	+100mm/-0

NO.	Specifications	Qty.
1	Ø3.0mm 12F OM3 Single Jacket Micro Cable / OFNR-UL / Aqua	1
2	12C MPO/PC Female MM Connector / Aqua Housing; Black Boot	2
01	First Issue	
REV	REVISION RECORD DESP.	ECN.NO
		ZONE
		BY
		DATE

TOLERANCE	±MM	PART DESCRIPTION		PART NO.	
X	---	12F MPO/PC-MPO/PC OM3 OFNR Patchcord-Portarty B		105542 105543	
X.X	---	DRAWN	CHKD	APROVED	
X.XX	---	F.SUN	Dylan Chen	Dylan Chen	
X.XXX	---	SCALE	UNIT	QTY	PAGE
REV	---	---	mm	1 PCS	1 OF 3
P/N	---	THIRD ANGLE PROJECTION			