


End A

End B

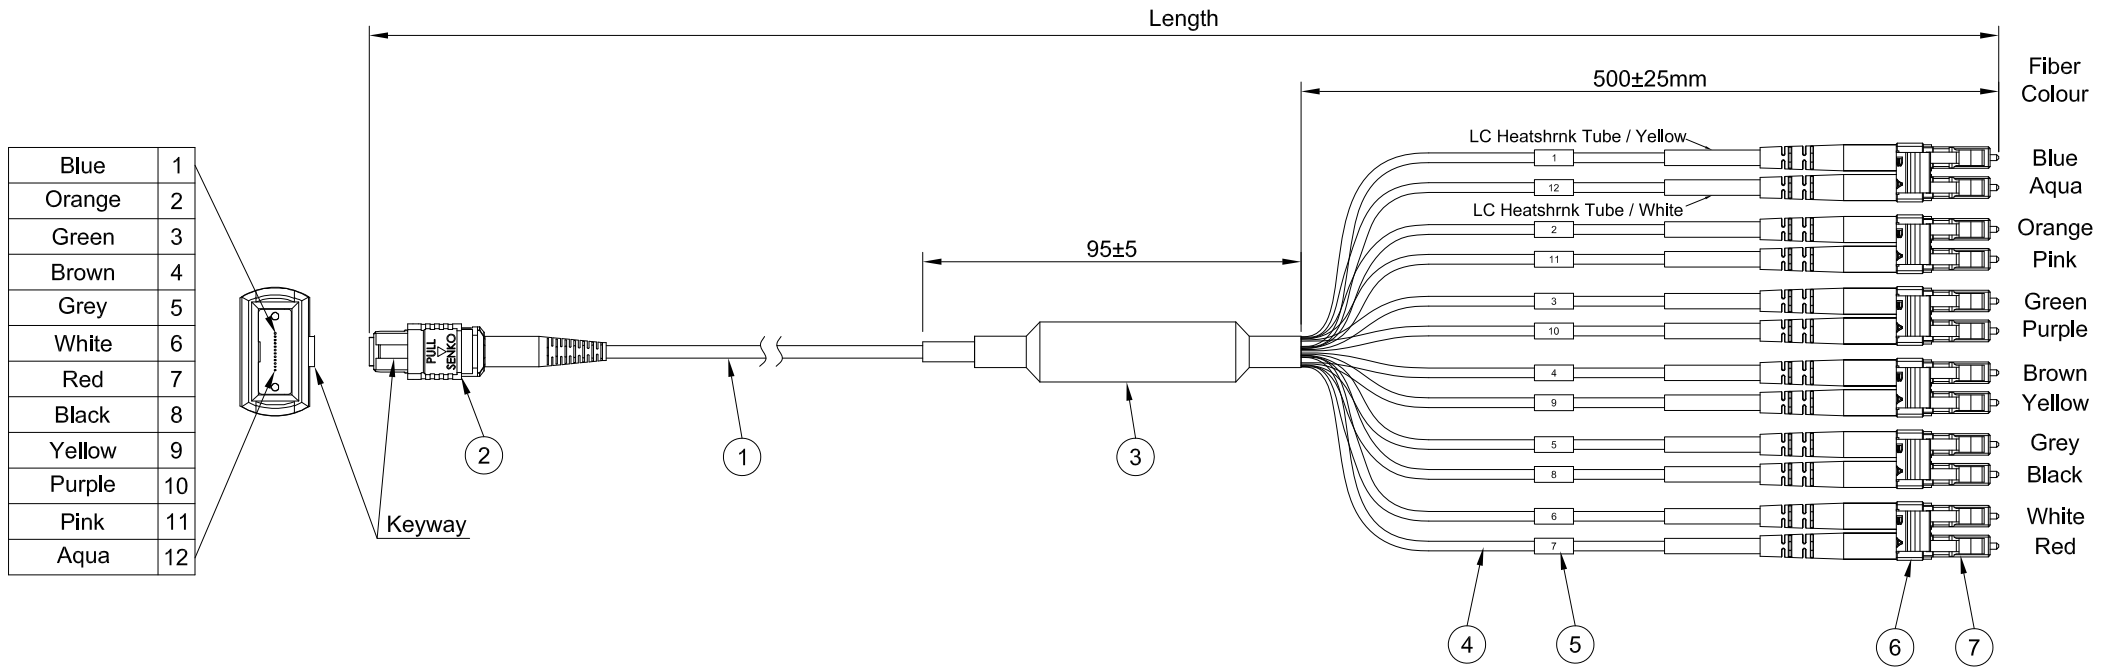

Blue	1
Orange	2
Green	3
Brown	4
Grey	5
White	6
Red	7
Black	8
Yellow	9
Purple	10
Pink	11
Aqua	12

**Performance:**

- 1. MPO/PC: IL≤0.5dB,RL≥35dB(@850nm).
- LC/UPC: IL≤0.3dB,RL≥35dB(@850nm).

- Note: Multi mode length≤3M, return loss not tested.
- 2.Storage or transportation: -20~70°C
- 3.Operation: -20~70°C
- 4.Installation: -0~50°C
- 5.Optical cable printing content:  
MICRO CABLE OPTICAL FIBER CABLE 12x50/125 OM4 ROHS COMPLIANT 0051  
XXXXXX(serial number) OFNR (UL) E361917 0000M

Item	Length	Tolerance
/	1m	+100mm/-0
105547	3m	+100mm/-0
105548	5m	+100mm/-0
/	10m	+100mm/-0

NO.	Specifications	Qty.
1	Ø3.0mm 12F OM4 Single Jacket Micro Cable / OFNR-UL / Aqua	1
2	12F MPO/PC Female MM Connector / Aqua Housing; Black Boot	1
3	Aluminium Tube / with Black Adhesive Heatshrink Tube outside	1
4	Ø2.0mm Furcation Tubing / Aqua	12
5	Movable-Tail Identification Marker(O-Ring) / No.1~12	12
6	LC Duplex Clip / Beige	6
7	2.0 LC/UPC Duplex MM Connector / Beige Housing; White Boot	12
01	First Issue	F.SUN 08-14-2024
REV	REVISION RECORD DESP.	ECN.NO ZONE BY DATE

TOLERANCE	±MM	PART DESCRIPTION	PART NO.		
X	—	12F MPO/PC-LC/UPC OM4 Aqua OFNR Patchcord- Porlarty B	105547 105548		
X.X	—	DRAWN	CHKD	APROVED	
X.XX	—	F.SUN	Dylan Chen		Dylan Chen
X.XXX	—	SCALE	UNIT	QTY	PAGE
REV	—	—	mm	1 PCS	1 OF 3
P/N	—	THIRD ANGLE PROJECTION			