

Product Description:

ODF-RS-205 is 19inch 1U slidable type fiber optic patch panel. It is used in fiber optic cabinet for fiber splicing, connection, protection and management.

Features:

1. 19inch rack mounted application.
2. Small size, no sliding rail, light weight and reasonable structure.
3. Material: Cold-rolled steel, electrostatic power painting.
4. Color: black.
5. Dismountable adapter panel, easy to operate.
6. FC, LC, ST, SC ... adapter port available.
7. Capacity: 12, 24, 48 fibers.
8. Max. 4 splice tray of 12FO, max. 48FO.
9. Can load cable arrangement panel (GTP-1U-01) in front of adapter panel;
- 4pcs $\Phi 22$ mm cable entry ports (with two kinds of design), If load M22 cable gland for 7~13mm cable entry;
- 20pcs $\Phi 4.3$ mm round cable port at rear side.




Performance:

1. LC/UPC: IL \leq 0.30dB; RL \geq 50dB(@1330nm&1550nm).
2. Geometry(percent of pass \geq 85%);
Fiber Height:-100~+100nm;
Radius of curvature:7~25mm;
Apex Offset:0~50 μ m;
3. The end face meets IEC 61300-3-35 standard.
4. Storage or transportation: -20 $^{\circ}$ C ~70 $^{\circ}$ C
5. Operation: -10 $^{\circ}$ C ~60 $^{\circ}$ C


| Item (Carton) | X-Item (PE bag) | Length |
|---------------|-----------------|------------|
| 105605 | X5605 | ≥ 1 m |

| NO. | Specifications | Dimension | Material | Color | Qty. |
|-----|--------------------------|----------------|-----------------|-----------|------------|
| 1 | Steel box | 482x205x43.5mm | Cold-roll steel | Black | 1 |
| 2 | Fiber optic splice tray | / | ABS plastic | White | 2 |
| 3 | LC duplex adaptor | / | / | Blue | 24 |
| 4 | PE White T-type dust cap | / | PE | White | 24 |
| 5 | Fiber optic pigtail | ≥ 1 m | / | 12 Colors | 48 |
| 01 | First Issue | | XY.WEI | | 01-11-2025 |
| REV | REVISION RECORD DESP. | ECN.NO | ZONE | BY | DATE |

| TOLERANCE | \pm MM | PART DESCRIPTION | | PART NO. | |
|-----------|----------|---|------------|---------------|----------------------|
| X | — | Slidable Rack-mount ODF ODF-RS-205-48C | | 105605 | |
| X.X | — | DRAWN XY.WEI | | CHKD F.SUN | APROVED Ethan Cao |
| X.XX | — | SCALE — | UNIT mm | QTY 1 PCS | PAGE 1 OF 4 |
| X.XXX | — | THIRD ANGLE PROJECTION | | | |
| REV | — | | | | |
| P/N | — | | | | |

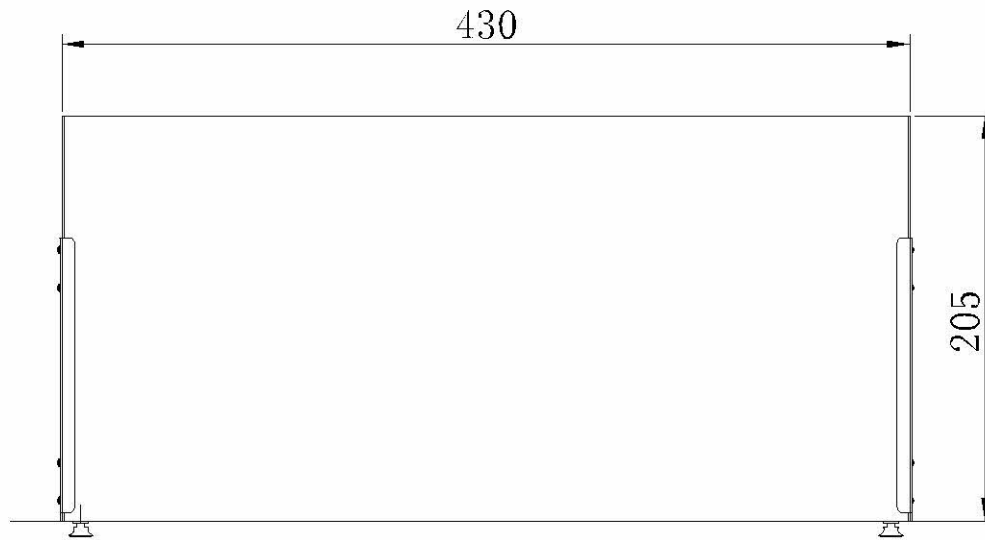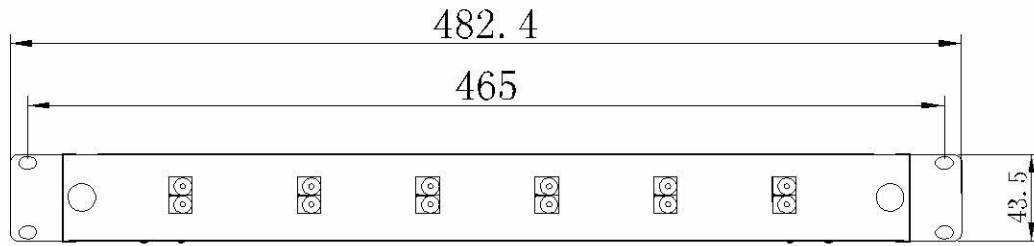


| Item (Carton) | X-Item (PE bag) | Length |
|---------------|-----------------|--------|
| 105605 | X5605 | ≥1m |

| | | | | |
|-----------------|------------|---------------|----------------|--|
| DRAWN XY.WEI | | CHKD F.SUN | | APROVED Ethan Cao |
| SCALE — | UNIT mm | QTY 1 PCS | PAGE 2 OF 4 | THIRD ANGLE PROJECTION  |




Picture of Accessories

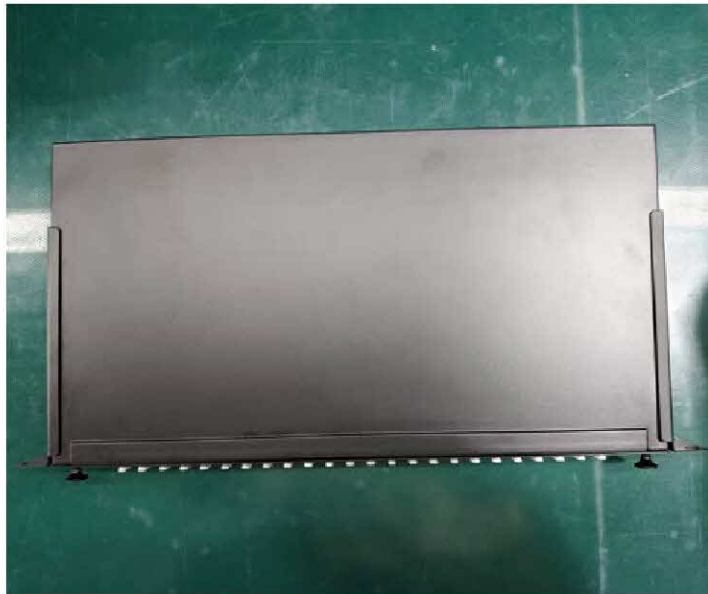

Picture of real product

Descriptions of Accessories:

| Item | Specification | QTY |
|-----------------------------------|---------------|-----------------------|
| Heat shrinkable protection sleeve | 45*2.6*1.2mm | As per using capacity |
| Cable tie | 3*120mm | 4PCS |
| PG gland | M20 | 2PCS |

| | | | | |
|-----------------|------------|---------------|----------------|--|
| DRAWN XY.WEI | | CHKD F.SUN | | APROVED Ethan Cao |
| SCALE — | UNIT mm | QTY 1 PCS | PAGE 3 OF 4 | THIRD ANGLE PROJECTION  |