




NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
A/0	13-10-31	Y1031J	NEW DRAWING

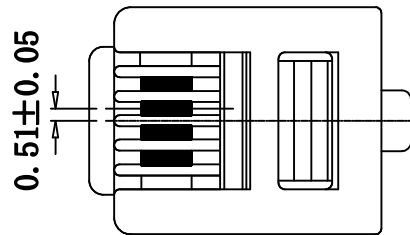


MP6P4C R

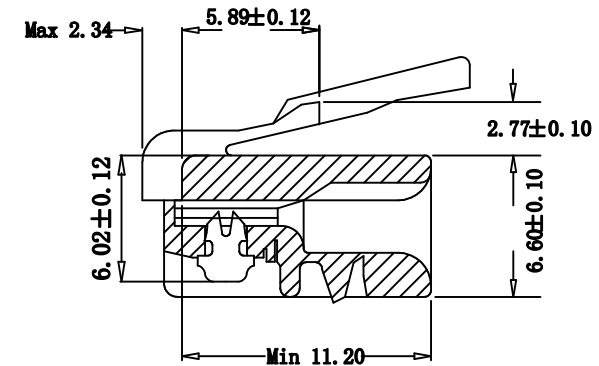

SPECIFICATIONS

MANUFACTURER	BON;ECI OR CZT
PART NO.	CHI06MP6F OR MODELS 6P-6C R
UL REF:	E159371;UL 498 NO,E129580 OR E134299
CSA REF	LR 90513 OR LR 96654
HOUSING	POLY CARBONATE(PC) UL94V2 NO. E919153
CONTACT BLADE	HIGH STRENGTH COPPER ALLOY
MATERIAL	100 MICRON NICKEL UNDERPLATED
PLATING TYPE	8% PHOSPHOR BRONZE
PLATING THICKNESS:	(FU") GOLD PLATED
OPERATING TEMP	-40° C TO 125° C
CURRENT RATING	250V AC MAX AT 2A
DIELECTRIC	500V AC
INSULATION RES	500MEGAOHMS
TERMINATION RES	35 MAX AFTER ENVIRONMENTAL TESTS
TENSILE STRENGTH	20 LBS (89N) MIN
DURABILITY	500 MATING CYCLES
COMPLIES WITH FCC68/F	

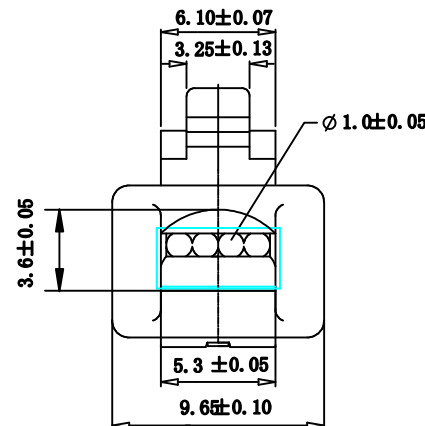

PART NO	DRAWING NO	BUYER COLOR	VENDOR COLOR	CUT LENGTH
170302	217-047-A			

⑦				
⑥				
⑤				
④				
③				
②				
①	PLUG	6P4C FU" R	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DRAWN BY:	DATE:	DESCRIPTION:		
	2013/10/31	RJ11 PLUG 6P4C FU" ROUND		
CHECKED BY	SHEET 1 of 1	ITEM NO.170302		
APPROVED BY	SCALE 1:1	REV. A/0	UNIT: mm	