


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

| Rev. | Rev. Date | Modified By | Brief Description |
|------|-----------|-------------|-------------------|
| | | | |

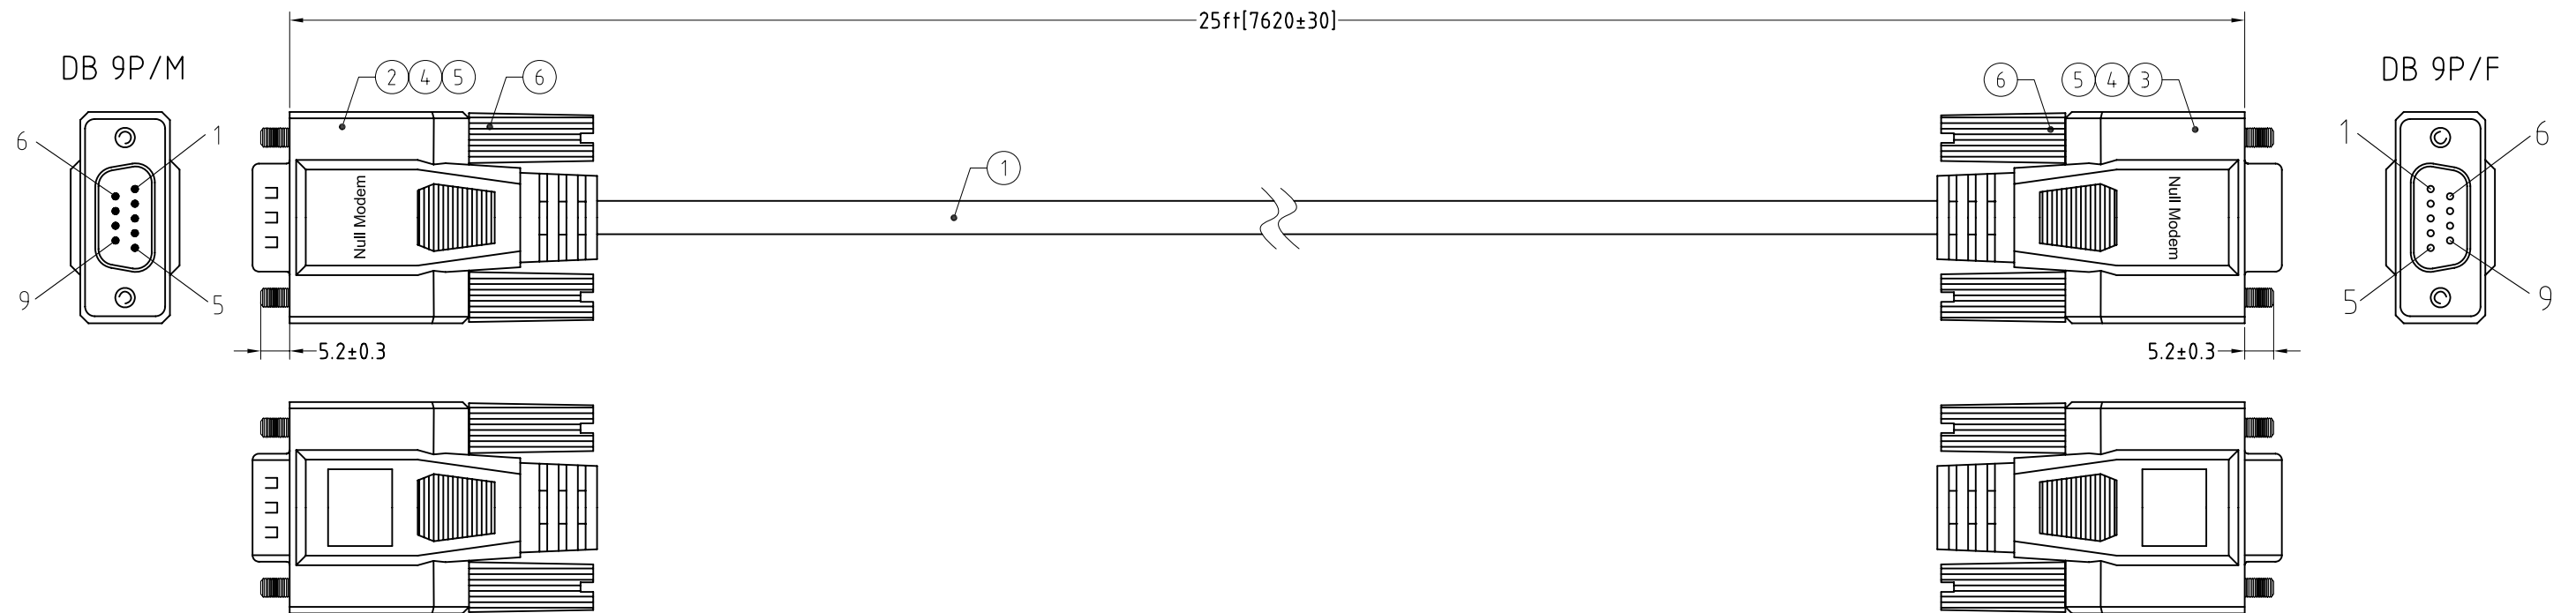


Electrical character:

- 1)100% Open/short/Intermittent testing
- 2)Withstanding voltage:DC 300V AT 10ms.
- 3)Insulation resistance:5M Ohm(min)
- 4)Conductive resistance:7 Ohm(max)

PIN ASSIGNMENT:

| DB 9P/M | DB 9P/F |
|---------|---------|
| 1&6 | 4 |
| 2 | 3 |
| 3 | 2 |
| 4 | 1&6 |
| 5 | 5 |
| 7 | 8 |
| 8 | 7 |
| SHELL | SHELL |

Wire Details

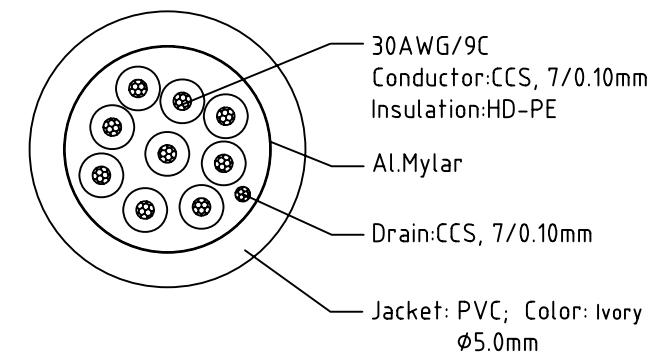

| ① | Cable | 30#(7/0.10CCS)*9C+D+A+PVC,Ivory,OD5.0mm | | |
|-----|------------|--|-----|------|
| ② | Conn | DB 9P/M,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type | | |
| ③ | Conn | DB 9P/F,PIN G/F,Blue Insulation,Steel-Shell(Nickel Plated),Solder type | | |
| ④ | Innermold | PE,Low density | | |
| ⑤ | Overmold | PVC,45Pa,Ivory | | |
| ⑥ | Thumbscrew | #4-40UNC,Ø4.0*L37.4mm,Nickel Plated,Molding PVC(Ivory) | | |
| NO. | PART NAME | SPECIFICATION DESCRIPTION | QTY | UNIT |


Unless specified on the drawing, tolerances are per the follows:

| | |
|-----|-------|
| . | +1 |
| .X | +0.2 |
| .XX | +0.05 |


| | | |
|-------------|---------------------|---|
| DRAWN BY | DATE: 2021/08/27 | DESCRIPTION: DB 9P M TO F Null Modem Cable |
| CHECKED BY | SHEET 1of2 | ITEM NO. 180510 |
| APPROVED BY | SCALE None | REV. 0.0 UNIT:mm |

NOTE: CARTON MATERIAL MUST BE A=A




| REVISION INFORMATION | | | |
|----------------------|-----------|-------------|-------------------|
| Rev. | Rev. Date | Modified By | Brief Description |
| | | | |

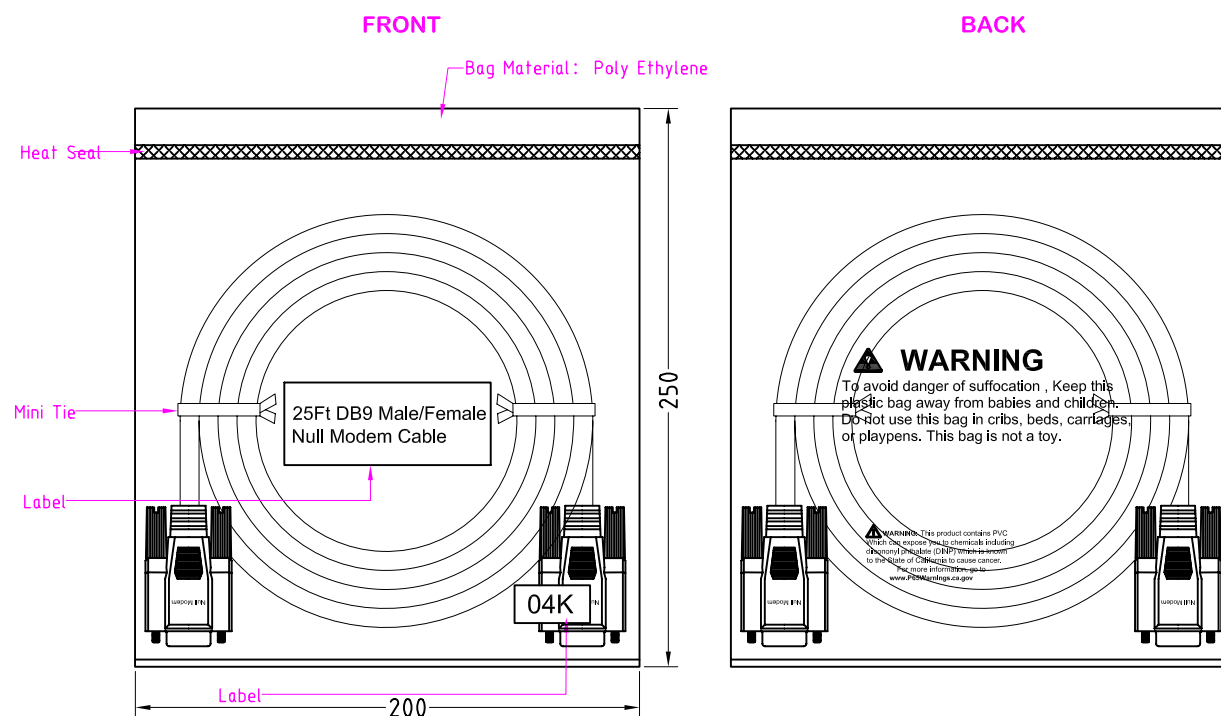

50pcs →

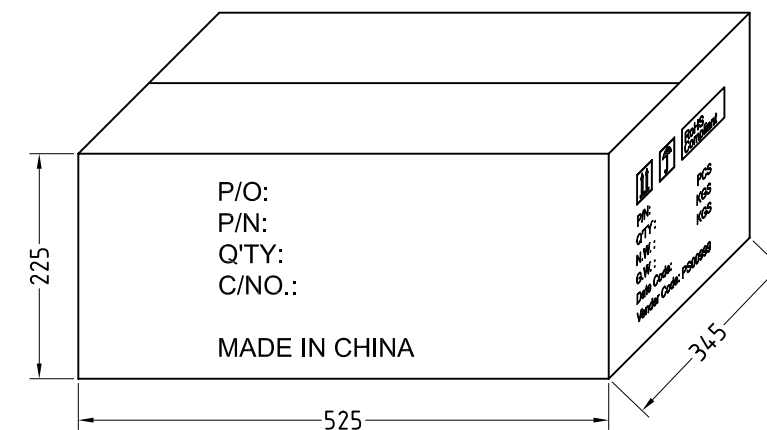


MAIN MARK

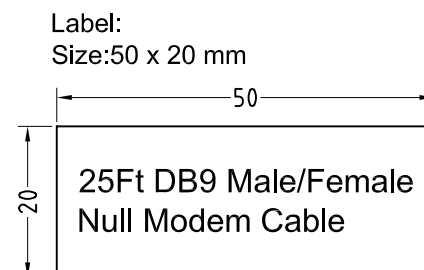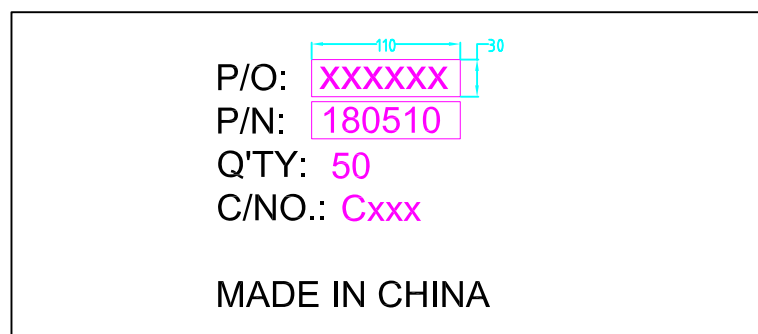

Packing Instruction:

1. First of all, coil the cable (see attached). Secure the cable with cable tie, and then pack each cable with an individual PE bag.
2. Seal the PE bag with heat sealing machine.
3. Use a waterproof bag to pack the products before going into master carton. Make sure each individual cable is staggered and positioned tidily. A paperboard is needed in both the bottom and the top of the products.
4. See shipping mark on the left.

SIDE MARK

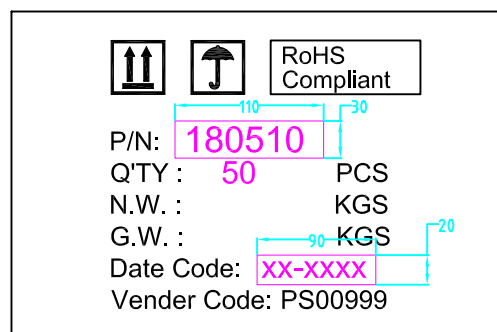

Carton Size: 20.67"(L)*13.58"(W)*8.86"(H)
 Carton Quantity: 50 pcs
 Carton Weight: 17.07 LBS

| | | | |
|-------------|---------------------|---|---------|
| | | | |
| DRAWN BY | DATE: 2021/08/27 | DESCRIPTION: DB 9P M TO F Null Modem Cable | |
| CHECKED BY | SHEET 2of2 | ITEM NO. 180510 | |
| APPROVED BY | SCALE None | REV. 0.0 | UNIT:mm |