






NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev.Date	Modified By	Brief Description
V2.0	16 Mar 22	Mona	Added total connection length

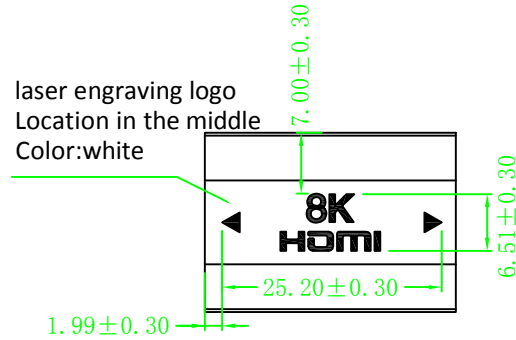

CN1	CN2
01	01
02	02
03	03
04	04
05	05
06	06
07	07
08	08
09	09
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
SHELL	SHELL

Note:

- 100% short/open circuit & miswire test conditions.
- On-resistance≤5Ω.  
Withstand voltage test: AC 300V/10mS. Leakage current 0.5mA.  
Insulation resistance ≥10MΩ. High voltage test: DC 300V/10mS.
- Mark **xx** as the key control size.
- Up to 8K60HZ, 7680\*4320 resolution.
- To avoid distortion , please keep a total connection length of less than 5 meters .

6	Shell	Aluminum Alloy Shell Gray	5. 10. 51-10	1PCS
5	Outer mold	PVC material 45P black	5. 09. 02-1	3.7G
4	Internal connection	PCB T=1.60MM		1PCS
3	Sheath	HDMI AF Sheath, Nickel plated		2PCS
2	Connector	HDMI AF Iron Shell Gold Plated G/F PIN Gold Plated 15U" Black		1PCS
1	Connector	HDMI AF Iron Shell Gold Plated G/F PIN Gold Plated 15U" Black		1PCS
Item	Name	Material	Part No.	Dosage

<b>DRAWN BY</b>	<b>DATE:</b> 2022. 03. 15	<b>DESCRIPTION:</b> HDMI Female/Female Coupler support 8K@60Hz
<b>CHECKED BY</b>	<b>SHEET 1 of 1</b>	<b>ITEM NO.</b> 181249
<b>APPROVED BY</b>	<b>SCALE 1:1</b>	<b>REV. 00</b> <b>UNIT: mm</b>