
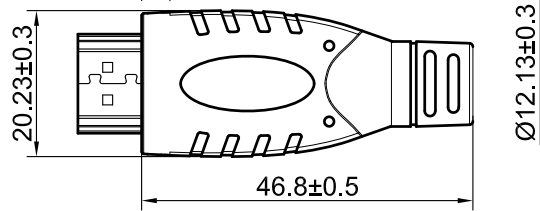


NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD



REVISION INFORMATION			
Rec.	Rec. Date	Modified By	Brief Description

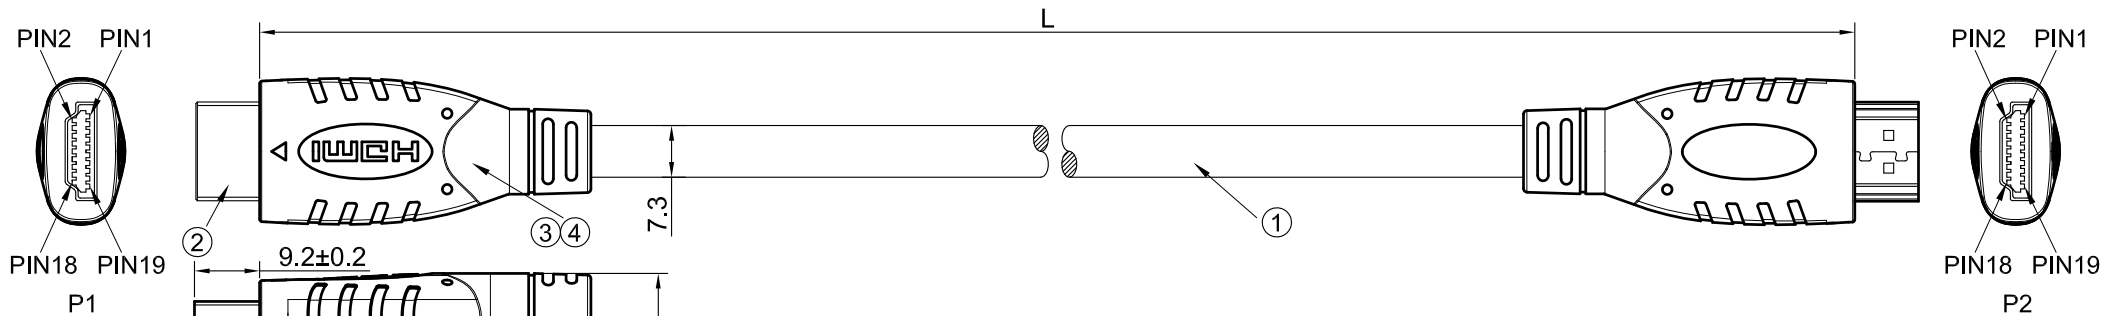

P/N	LENGTH(FT)	TOLERANCE
181362	20	±50mm

**NOTES:**

- Test Condition:
  - 100% OPEN & SHORT TEST;
  - Insulation Resistance: DC300V 5MΩ(Min) ;
  - Conductor Resistance: 5Ω/Max.
  - Hi-Pot:DC 300V/0.1s.
- The product is ROHS compliant.
- HDTV-DVD TEST:4K@60Hz
- All material requirements comply with CA65 standards.
- 3D TEST.

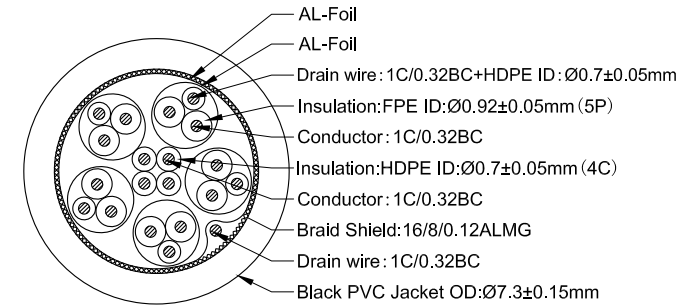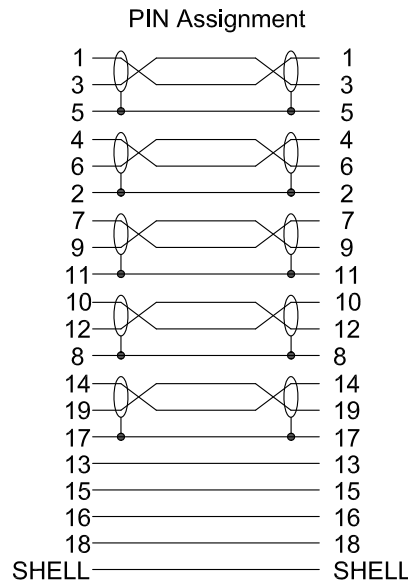

TOLERANCE:	
LINEAR: X. =±1	ANGULAR: X.° =±1°
.X =±0.2	.X° =±0°30'
.XX=±0.05	
FILLET: R2=RAD.2mm	CHAMFER: C0.5=CHAM0.5mm
R5=RAD.5mm	C1=CHAM1mm
XR=MAX RAD.	

4	OUTER MOLDED: 45P PVC MOLDED BOOT
3	INNER MOLDED: PE Low density
2	CONN: HDMI AM iron case gold plated/black rubber core + 28AWG bracket
1	WIRE: [(1/0.32BC+FPE 0.92)*1P+1/0.32BC+HDPE 0.7+Al-Foil]*5P+(1/0.32BC+HDPE 0.7)*4C+AL-Foil+D1/0.32BC+B128#/0.12AL+Black PVC OD:7.3±0.15mm
NO.	SPECIFICATION
	BOM LIST

DRAWN BY FW	DATE: 2023/07/31	DESCRIPTION: 20FT HDMI Cable 4K/60Hz 28AWG
CHECKED BY Ace	SHEET 1 of 2	ITEM NO. 181362
APPROVED BY	SCALE 1:1	REC. 00 UNIT: mm