


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
03	2024/7/26	SHA0	

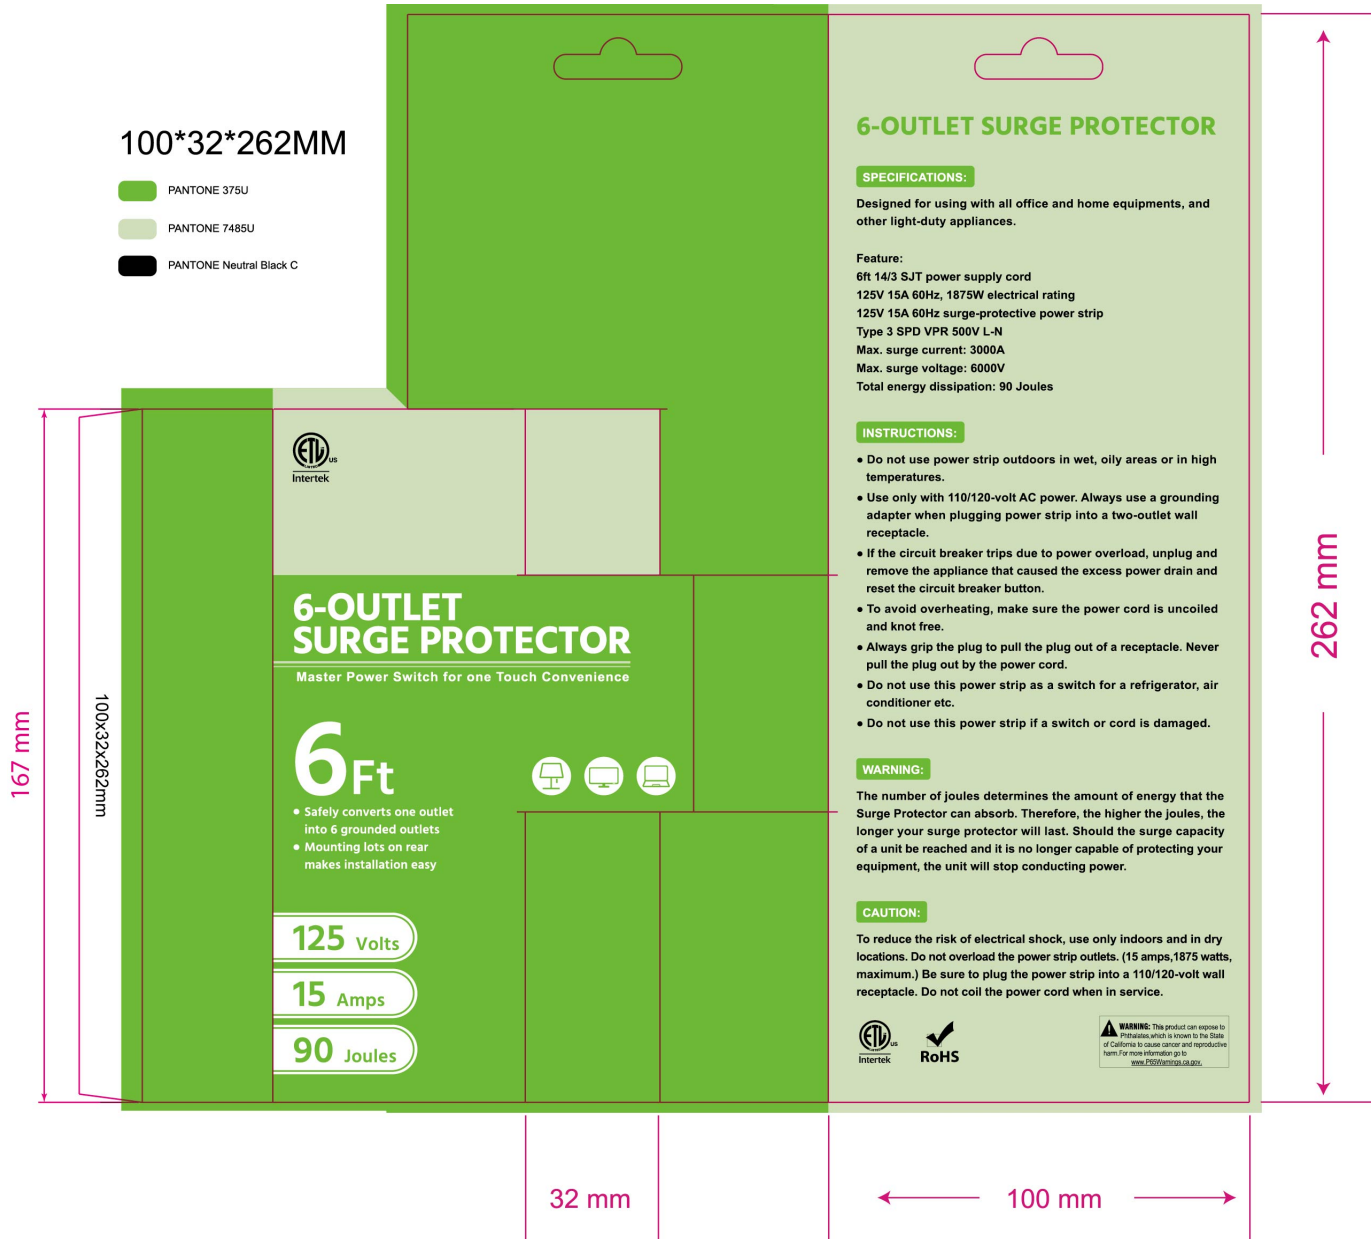

**6-OUTLET SURGE PROTECTOR**

**SPECIFICATIONS:**

Designed for using with all office and home equipments, and other light-duty appliances.

**Feature:**  
 6ft 14/3 SJT power supply cord  
 125V 15A 60Hz, 1875W electrical rating  
 125V 15A 60Hz surge-protective power strip  
 Type 3 SPD VPR 500V L-N  
 Max. surge current: 3000A  
 Max. surge voltage: 6000V  
 Total energy dissipation: 90 Joules

**INSTRUCTIONS:**

- Do not use power strip outdoors in wet, oily areas or in high temperatures.
- Use only with 110/120-volt AC power. Always use a grounding adapter when plugging power strip into a two-outlet wall receptacle.
- If the circuit breaker trips due to power overload, unplug and remove the appliance that caused the excess power drain and reset the circuit breaker button.
- To avoid overheating, make sure the power cord is uncoiled and knot free.
- Always grip the plug to pull the plug out of a receptacle. Never pull the plug out by the power cord.
- Do not use this power strip as a switch for a refrigerator, air conditioner etc.
- Do not use this power strip if a switch or cord is damaged.

**WARNING:**

The number of joules determines the amount of energy that the Surge Protector can absorb. Therefore, the higher the joules, the longer your surge protector will last. Should the surge capacity of a unit be reached and it is no longer capable of protecting your equipment, the unit will stop conducting power.

**CAUTION:**


To reduce the risk of electrical shock, use only indoors and in dry locations. Do not overload the power strip outlets. (15 amps, 1875 watts, maximum.) Be sure to plug the power strip into a 110/120-volt wall receptacle. Do not coil the power cord when in service.



NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT
③				
②				
①				

Unless specified on the drawing, tolerances are per the follows:  
 .                   +1  
 .x                  +0.2  
 .xx                 +0.05

DRAWN BY	DATE: 2024/7/26	DESCRIPTION: 6FT 6 Outlet Surge Protector
CHECKED BY	SHEET 1 of 1	ITEM NO. 215002BK
APPROVED BY	SCALE	REV. 03 UNIT: mm




NOTE: CARTON MATERIAL MUST BE A=A


REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description


内盒  
正唛 (前后两面)

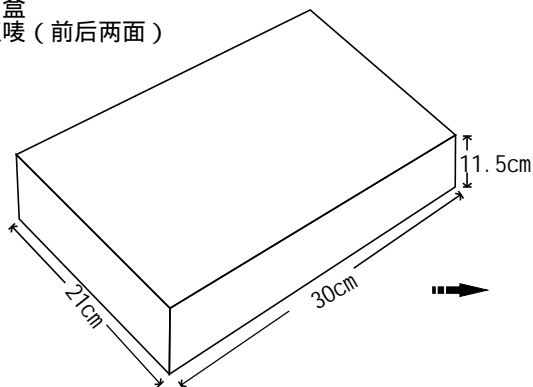


Main Mark

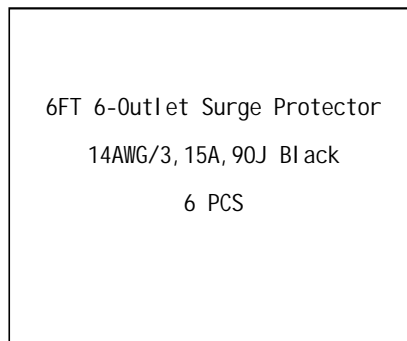

Side Mark






**RoHS  
Compliant**

P/N: 215002BK  
 QTY: 24 PCS  
 N.W.: 11.5 KGS  
 G.W.: 12.0 KGS  
 Date code: 33-2024  
 Vender Code: PS01904

Main Mark  
正唛 (前后两面)

P/O: NB/EP100214  
 P/N: 215002BK  
 QTY: 24 PCS  
 C/NO.:

MADE IN CHINA

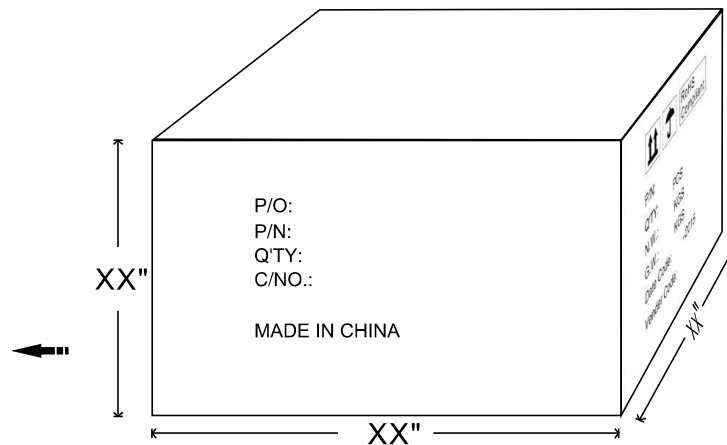

Carton Size: 43.5x31.5x24.5 cm  
 Carton Quantity: 24 PCS  
 Carton Weight: 26.45 LBS

注：唛头必须印刷于外箱上，印刷面积至少占印刷面的2/3。



DRAWN BY	DATE: 2024/7/26	DESCRIPTION: 6FT 6 Outlet Surge Protector
CHECKED BY	SHEET 1 of 2	ITEM NO. 215002BK
APPROVED BY	SCALE	REV. 03 UNIT:mm 