
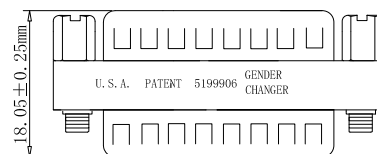
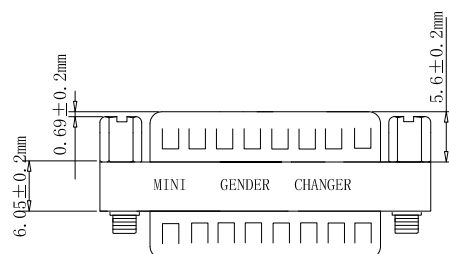
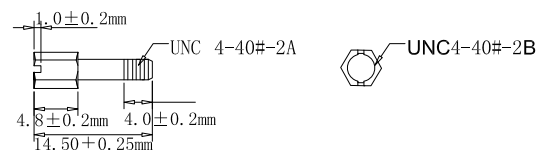


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION


Rev.	Rev. Date	Modified By	Brief Description



Specification:
Rating Current: 3 AMP
Insulation Resistance: 1000M Ohm min. at 500V DC
Dielectric Strength: 1000V AC for one minute.
Temperature: -55°C~+105°C
Contact: Brass Gold flash over Nickel Plated
Shell: SPCC Nickel Plated
Insulator: PBT+30%GF UL94V-0 Blue
Screw: Steel 12L14 Nickel Plated
Label: Yellow color black character
One Side: MINI GENER CHANGER
Other Side: U.S.A PATENT 5199906

PIN ASSIGNMENT

DB25M	DB25M	DB25M	DB25M
1	1	17	17
2	2	18	18
3	3	19	19
4	4	20	20
5	5	21	21
6	6	22	22
7	7	23	23
8	8	24	24
9	9	25	25
10	10		
11	11		
12	12		
13	13		
14	14		
15	15		
16	16		



DRAWN BY	DATE: 2017.9.26	DESCRIPTION: DB25 Male/Male Mini Gender changer	
CHECKED BY	SHEET 1 of 1	ITEM NO. 271005	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm