

# *Networking*





Since 1983, our manufacturers have been providing quality networking connectivity and power cord solutions to leading distributors and manufacturers. We can meet your design needs with competitive price. Our manufacturers strictly comply with product standards and regulations, such as 3P, UL, or RoHS. Not only just product quality assurance, all our factories are operated under compliance of ethical standards and labor/health laws required by many US major companies. **Contact us** to see how we can serve you.

Many first time customers ask us "How come your prices are so low? Are your products the same as the ones I buy at retail stores paying double, triple or even more?" Yes, our products are coming from high-quality standard manufactures complying with industry and environment standards such as ISO9001, ISO14001 or RoHS. This low price is possible because we concentrate our resources on the product itself and make every effort to eliminate unnecessary costs. We'll give you some of the secrets. Let's take our patch cables for an example.



You will receive our patch cable in a plain sealed polly bag with a simple label. We do not use fancy looking clamshell packaging that goes to trash can as soon as opened. Here's an elimination of packaging cost (design, material and manufacturing cost of clamshell). We have many professional networking installers among our customers. They support our simple packaging method.



**>>> Networking**

**Patch Cord**

**Patch Panel**


**Tools**

**Plugs**

**Keystone Jack**

**Coupler**


**Wall Plate**

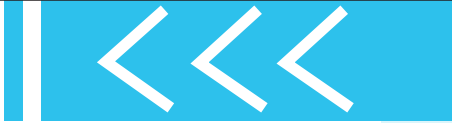

# Category 5E UTP Patch Cable

Conductor	Material/Size	Bare Copper/24AWG
Insulation	Material	HDPE
	Thickness	Nominal:0.186mm
	Diameter	Nominal:0.96mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Unaged Elongation	Min.300%
	Unaged Tensile Strength	Min.1.683Kg/mm <sup>2</sup>
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal:0.5mm
	Diameter	Nominal:5.4mm
	Color	Assorted upon request
	Unaged Elongation	Min.100%
	Unaged Tensile Strength	Min.1.407Kg/mm <sup>2</sup>
Marking	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
		YFC CAT.5E UTP PATCH ETL/3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 24AWGX4P CM(UL) c(UL) E164469-XX
		or as customer request.

## Cat.5E Patch Cable Booted(UTP)

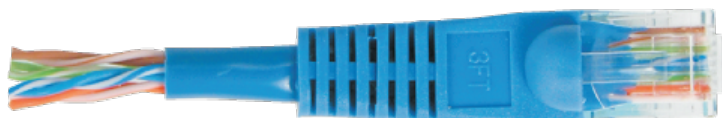

- \* 24AWG stranded bare copper wire
- \* Standard 568B twisted 4 Pair
- \* 50 micron gold plated RJ45 plug
- \* Injection mold snagless boots

Length	Item#										Package	Qty/ctn
0.5Ft	100516BK	100516BL	100516GY	100516GN	100516OR	100516PU	100516RD	100516WT	100516YW	PE bag	500	
1Ft	100501BK	100501BL	100501GY	100501GN	100501OR	100501PU	100501RD	100501WT	100501YW	PE bag	400	
1.5Ft	100517BK	100517BL	100517GY	100517GN	100517OR	100517PU	100517RD	100517WT	100517YW	PE bag	300	
2Ft	100502BK	100502BL	100502GY	100502GN	100502OR	100502PU	100502RD	100502WT	100502YW	PE bag	300	
3Ft	100503BK	100503BL	100503GY	100503GN	100503OR	100503PU	100503RD	100503WT	100503YW	PE bag	250	
4Ft	100500BK	100500BL	100500GY	100500GN	100500OR	100500PU	100500RD	100500WT	100500YW	PE bag	220	
5Ft	100504BK	100504BL	100504GY	100504GN	100504OR	100504PU	100504RD	100504WT	100504YW	PE bag	200	
6Ft	100513BK	100513BL	100513GY	100513GN	100513OR	100513PU	100513RD	100513WT	100513YW	PE bag	160	
7Ft	100505BK	100505BL	100505GY	100505GN	100505OR	100505PU	100505RD	100505WT	100505YW	PE bag	150	
8Ft	100541BK	100541BL	100541GY	100541GN	100541OR	100541PU	100541RD	100541WT	100541YW	PE bag	130	
9Ft	100542BK	100542BL	100542GY	100542GN	100542OR	100542PU	100542RD	100542WT	100542YW	PE bag	110	
10Ft	100506BK	100506BL	100506GY	100506GN	100506OR	100506PU	100506RD	100506WT	100506YW	PE bag	110	
12Ft	100540BK	100540BL	100540GY	100540GN	100540OR	100540PU	100540RD	100540WT	100540YW	PE bag	110	
15Ft	100507BK	100507BL	100507GY	100507GN	100507OR	100507PU	100507RD	100507WT	100507YW	PE bag	100	
20Ft	100514BK	100514BL	100514GY	100514GN	100514OR	100514PU	100514RD	100514WT	100514YW	PE bag	70	
25Ft	100508BK	100508BL	100508GY	100508GN	100508OR	100508PU	100508RD	100508WT	100508YW	PE bag	65	
30Ft	100519BK	100519BL	100519GY	100519GN	100519OR	100519PU	100519RD	100519WT	100519YW	PE bag	40	
35Ft	100518BK	100518BL	100518GY	100518GN	100518OR	100518PU	100518RD	100518WT	100518YW	PE bag	40	
40Ft	100520BK	100520BL	100520GY	100520GN	100520OR	100520PU	100520RD	100520WT	100520YW	PE bag	30	
50Ft	100509BK	100509BL	100509GY	100509GN	100509OR	100509PU	100509RD	100509WT	100509YW	PE bag	25	
75Ft	100510BK	100510BL	100510GY	100510GN	100510OR	100510PU	100510RD	100510WT	100510YW	PE bag	24	
100Ft	100511BK	100511BL	100511GY	100511GN	100511OR	100511PU	100511RD	100511WT	100511YW	PE bag	20	
125Ft	100543BK	100543BL	100543GY	100543GN	100543OR	100543PU	100543RD	100543WT	100543YW	PE bag	16	
150Ft	100512BK	100512BL	100512GY	100512GN	100512OR	100512PU	100512RD	100512WT	100512YW	PE bag	10	
175Ft	100544BK	100544BL	100544GY	100544GN	100544OR	100544PU	100544RD	100544WT	100544YW	PE bag	16	
200Ft	100515BK	100515BL	100515GY	100515GN	100515OR	100515PU	100515RD	100515WT	100515YW	PE bag	8	

Patch cord

## Cat.5E Patch Cable Non-Booted(UTP)



- \* 24AWG stranded bare copper wire
- \* Standard 568B twisted 4 Pair
- \* 50 micron gold plated RJ45 plug

Length	Item#										Package	Qty/ctn
0.5Ft	100416BK	100416BL	100416GY	100416GN	100416OR	100416PU	100416RD	100416WT	100416YW	PE bag	500	
1Ft	100401BK	100401BL	100401GY	100401GN	100401OR	100401PU	100401RD	100401WT	100401YW	PE bag	400	
2Ft	100413BK	100413BL	100413GY	100413GN	100413OR	100413PU	100413RD	100413WT	100413YW	PE bag	300	
3Ft	100402BK	100402BL	100402GY	100402GN	100402OR	100402PU	100402RD	100402WT	100402YW	PE bag	250	
4Ft	100400BK	100400BL	100400GY	100400GN	100400OR	100400PU	100400RD	100400WT	100400YW	PE bag	220	
5Ft	100403BK	100403BL	100403GY	100403GN	100403OR	100403PU	100403RD	100403WT	100403YW	PE bag	200	
6Ft	100414BK	100414BL	100414GY	100414GN	100414OR	100414PU	100414RD	100414WT	100414YW	PE bag	160	
7Ft	100404BK	100404BL	100404GY	100404GN	100404OR	100404PU	100404RD	100404WT	100404YW	PE bag	150	
10Ft	100405BK	100405BL	100405GY	100405GN	100405OR	100405PU	100405RD	100405WT	100405YW	PE bag	110	
15Ft	100406BK	100406BL	100406GY	100406GN	100406OR	100406PU	100406RD	100406WT	100406YW	PE bag	100	
20Ft	100415BK	100415BL	100415GY	100415GN	100415OR	100415PU	100415RD	100415WT	100415YW	PE bag	70	
25Ft	100407BK	100407BL	100407GY	100407GN	100407OR	100407PU	100407RD	100407WT	100407YW	PE bag	65	
40Ft			100418GY							PE bag	30	
50Ft	100408BK	100408BL	100408GY	100408GN	100408OR	100408PU	100408RD	100408WT	100408YW	PE bag	25	
75Ft	100409BK	100409BL	100409GY	100409GN			100409RD	100409WT		PE bag	24	
100Ft	100410BK	100410BL	100410GY	100410GN	100410OR		100410RD	100410WT	100410YW	PE bag	20	
150Ft	100411BK	100411BL	100411GY				100411RD	100411WT		PE bag	10	
200Ft	100412BK	100412BL	100412GY				100412RD			PE bag	8	

## Cat.5E Cross Patch Cables(UTP)



- \* 24AWG bare copper wire
- \* Cross-Over twisted 4 Pair
- \* Gray cable with green boots

Length	Item#	Package	Qty/ctn
1Ft	100521GY	PE bag	400
3Ft	100523GY	PE bag	250
5Ft	100524GY	PE bag	200
7Ft	100525GY	PE bag	150
10Ft	100526GY	PE bag	110
15Ft	100527GY	PE bag	100
25Ft	100528GY	PE bag	65

# Category 5E STP Patch Cable

Conductor	Material/Size	Bare Copper/26AWG
Insulation	Material	HDPE
	Thickness	Nominal:0.21mm
	Diameter	Nominal:0.91mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Unaged Elongation	Min.300%
Screen	Material	Aluminum-Mylar tape
Drain Wire	Material	Tinned copper
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal:0.52mm
	Diameter	Nominal:5.6mm
	Color	Assorted upon request
	Unaged Elongation	Min.100%
	Unaged Tensile Strength	Min.1.407Kg/mm <sup>2</sup>
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking	YFC CAT.5E STP PATCH 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-2-2 & IEC 60332-1-2 26AWGX4P CM(UL) c(UL) E164469-XX or as customer request	

## Cat.5E Shielded Patch Cable (STP)



- \* 26AWG stranded bare copper wire
- \* Standard 568B twisted 4 Pair
- \* Foil shield with drain wire
- \* 50 micron gold plated shielded RJ45 plug
- \* Injection mold snagless boots

Length	Item#						Package Qty/ctn				
0.5Ft	100614BK	100614BL	100614GY	100614GN	100614OR	100614PU	100614RD	100614WT	100614YW	PE bag	500
1Ft	100601BK	100601BL	100601GY	100601GN	100601OR	100601PU	100601RD	100601WT	100601YW	PE bag	400
2Ft	100602BK	100602BL	100602GY	100602GN	100602OR	100602PU	100602RD	100602WT	100602YW	PE bag	300
3Ft	100603BK	100603BL	100603GY	100603GN	100603OR	100603PU	100603RD	100603WT	100603YW	PE bag	250
4Ft	100600BK	100600BL	100600GY	100600GN	100600OR	100600PU	100600RD	100600WT	100600YW	PE bag	220
5Ft	100604BK	100604BL	100604GY	100604GN	100604OR	100604PU	100604RD	100604WT	100604YW	PE bag	200
6Ft	100615BK	100615BL	100615GY	100615GN	100615OR	100615PU	100615RD	100615WT	100615YW	PE bag	150
7Ft	100605BK	100605BL	100605GY	100605GN	100605OR	100605PU	100605RD	100605WT	100605YW	PE bag	150
10Ft	100606BK	100606BL	100606GY	100606GN	100606OR	100606PU	100606RD	100606WT	100606YW	PE bag	110
12Ft			100620GY							PE bag	
15Ft	100607BK	100607BL	100607GY	100607GN	100607OR	100607PU	100607RD	100607WT	100607YW	PE bag	70
20Ft	100616BK	100616BL	100616GY	100616GN	100616OR		100616RD	100616WT	100616YW	PE bag	60
25Ft	100608BK	100608BL	100608GY	100608GN	100608OR	100608PU	100608RD	100608WT	100608YW	PE bag	65
35Ft	100618BK	100618BL	100618GY	100618GN	100618OR		100618RD	100618WT	100618YW	PE bag	40
50Ft	100609BK	100609BL	100609GY	100609GN	100609OR	100609PU	100609RD	100609WT	100609YW	PE bag	25
75Ft	100610BK	100610BL	100610GY	100610GN	100610OR		100610RD	100610WT	100610YW	PE bag	20
100Ft	100611BK	100611BL	100611GY	100611GN	100611OR	100611PU	100611RD	100611WT	100611YW	PE bag	20
125Ft	100635BK	100635BL	100635GY							PE bag	16
150Ft	100612BK	100612BL	100612GY	100612GN			100612RD	100612WT	100612YW	PE bag	10
175Ft	100636BK	100636BL	100636GY							PE bag	16
200Ft	100613BK	100613BL								PE bag	8

## Cat.5E Shielded Cross Cables Gary Wire/Green Boot(STP)




- \* 26AWG stranded bare copper wire
- \* Cross-Over twisted 4 Pair
- \* Foil shield with drain wire
- \* 50 micron gold plated shielded RJ45 plug
- \* Gray cable with green boots

Length	Item#	Package	Qty/ctn
1Ft	100621GY	PE bag	400
3Ft	100623GY	PE bag	250
7Ft	100625GY	PE bag	150
10Ft	100626GY	PE bag	110
15Ft	100627GY	PE bag	70
25Ft	100628GY	PE bag	65
50Ft	100629GY	PE bag	25
100Ft	100631GY	PE bag	20

# Category 6 UTP Patch Cable

Conductor	Material/Size	Bare Copper/24AWG
Insulation	Material	HDPE
	Thickness	Nominal:0.231mm
	Diameter	Nominal:1.05mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Unaged Elongation	Min.300%
	Unaged Tensile Strength	Min.1.683Kgf/mm <sup>2</sup>
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal:0.5mm
	Diameter	Nominal:5.8mm
	Color	Assorted upon request
	Unaged Elongation	Min.100%
	Unaged Tensile Strength	Min.1.407Kgf/mm <sup>2</sup>
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking	YFC CAT.6 UTP PATCH ETL/3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-6-2 & IEC 60332-1-2 24AWGX4P CM(UL) c(UL) E164469-XX or as customer request.	
(PS): " + " Mould separate		

## Cat.6 Patch Cable Booted(UTP)



- \* 24AWG stranded bare copper wire
- \* Standard 568B twisted 4 Pair
- \* 50 micron gold plated RJ45 plug
- \* Injection mold snagless boots

Length	Item#									Package Qty/ctn	
0.5Ft	100716BK	100716BL	100716GY	100716GN	100716OR	100716PU	100716RD	100716WT	100716YW	PE bag	500
1Ft	100701BK	100701BL	100701GY	100701GN	100701OR	100701PU	100701RD	100701WT	100701YW	PE bag	400
1.5Ft	100717BK	100717BL	100717GY	100717GN	100717OR	100717PU	100717RD	100717WT	100717YW	PE bag	300
2Ft	100702BK	100702BL	100702GY	100702GN	100702OR	100702PU	100702RD	100702WT	100702YW	PE bag	300
3Ft	100703BK	100703BL	100703GY	100703GN	100703OR	100703PU	100703RD	100703WT	100703YW	PE bag	150
4Ft	100700BK	100700BL	100700GY	100700GN	100700OR	100700PU	100700RD	100700WT	100700YW	PE bag	200
5Ft	100704BK	100704BL	100704GY	100704GN	100704OR	100704PU	100704RD	100704WT	100704YW	PE bag	120
6Ft	100713BK	100713BL	100713GY	100713GN	100713OR	100713PU	100713RD	100713WT	100713YW	PE bag	150
7Ft	100705BK	100705BL	100705GY	100705GN	100705OR	100705PU	100705RD	100705WT	100705YW	PE bag	120
8Ft	100748BK	100748BL	100748GY	100748GN	100748OR	100748PU	100748RD	100748WT	100748YW	PE bag	110
9Ft	100749BK	100749BL	100749GY	100749GN	100749OR	100749PU	100749RD	100749WT	100749YW	PE bag	90
10Ft	100706BK	100706BL	100706GY	100706GN	100706OR	100706PU	100706RD	100706WT	100706YW	PE bag	100
12Ft	100747BK	100747BL	100747GY	100747GN	100747OR	100747PU	100747RD	100747WT	100747YW	PE bag	80
15Ft	100707BK	100707BL	100707GY	100707GN	100707OR	100707PU	100707RD	100707WT	100707YW	PE bag	70
20Ft	100714BK	100714BL	100714GY	100714GN	100714OR	100714PU	100714RD	100714WT	100714YW	PE bag	60
25Ft	100708BK	100708BL	100708GY	100708GN	100708OR	100708PU	100708RD	100708WT	100708YW	PE bag	50
30Ft	100719BK	100719BL	100719GY	100719GN	100719OR	100719PU	100719RD	100719WT	100719YW	PE bag	45
35Ft	100718BK	100718BL	100718GY	100718GN	100718OR	100718PU	100718RD	100718WT	100718YW	PE bag	40
40Ft	100720BK	100720BL	100720GY	100720GN	100720OR	100720PU	100720RD	100720WT	100720YW	PE bag	25
50Ft	100709BK	100709BL	100709GY	100709GN	100709OR	100709PU	100709RD	100709WT	100709YW	PE bag	25
75Ft	100710BK	100710BL	100710GY	100710GN	100710OR	100710PU	100710RD	100710WT	100710YW	PE bag	20
100Ft	100711BK	100711BL	100711GY	100711GN	100711OR	100711PU	100711RD	100711WT	100711YW	PE bag	20
125Ft	100790BK	100790BL	100790GY	100790GN	100790OR	100790PU	100790RD	100790WT	100790YW	PE bag	16
150Ft	100712BK	100712BL	100712GY	100712GN	100712OR	100712PU	100712RD	100712WT	100712YW	PE bag	10
175Ft	100791BK	100791BL	100791GY	100791GN	100791OR	100791PU	100791RD	100791WT	100791YW	PE bag	8
200Ft	100715BK	100715BL	100715GY	100715GN	100715OR	100715PU	100715RD	100715WT	100715YW	PE bag	8





## Cat.6 Patch Cable Non-Booted (UTP)



- \* 26AWG stranded bare copper wire
- \* Standard 568B twisted 4 Pair

Length	Item#										Package	Qty/ctn
0.5Ft	100100BK	100100BL	100100GY	100100GN	100100OR		100100PU	100100RD	100100WT	100100YW	PE bag	500
1Ft	100101BK	100101BL	100101GY	100101GN	100101OR		100101PU	100101RD	100101WT	100101YW	PE bag	400
1.5Ft	100117BK	100117BL	100117GY	100117GN	100117OR		100117PU				PE bag	300
2Ft	100102BK	100102BL	100102GY	100102GN	100102OR		100102PU	100102RD	100102WT	100102YW	PE bag	300
3Ft	100103BK	100103BL	100103GY	100103GN	100103OR		100103PU	100103RD	100103WT	100103YW	PE bag	150
4Ft	100104BK	100104BL	100104GY	100104GN	100104OR		100104PU	100104RD	100104WT	100104YW	PE bag	200
5Ft	100105BK	100105BL	100105GY	100105GN	100105OR		100105PU	100105RD	100105WT	100105YW	PE bag	120
6Ft	100106BK	100106BL	100106GY	100106GN	100106OR			100106RD	100106WT	100106YW	PE bag	150
7Ft	100107BK	100107BL	100107GY	100107GN	100107OR		100107PU	100107RD	100107WT	100107YW	PE bag	120
10Ft	100108BK	100108BL	100108GY	100108GN	100108OR		100108PU	100108RD	100108WT	100108YW	PE bag	100
15Ft	100109BK	100109BL	100109GY	100109GN	100109OR		100109PU	100109RD	100109WT	100109YW	PE bag	70
20Ft	100110BK	100110BL	100110GY	100110GN	100110OR		100110PU	100110RD	100110WT	100110YW	PE bag	60
25Ft	100111BK	100111BL	100111GY	100111GN	100111OR		100111PU	100111RD	100111WT	100111YW	PE bag	50
50Ft	100112BK	100112BL	100112GY	100112GN	100112OR	100112PK		100112RD	100112WT	100112YW	PE bag	25
75Ft	100113BK	100113BL	100113GY						100113WT		PE bag	20
100Ft	100114BK	100114BL	100114GY	100114GN						100114YW	PE bag	20

## Cat.6 Cross Patch Cables(UTP)




- \* 24AWG bare copper wire
- \* Standard 568B twisted 4 Pair
- \* Injection mold snagless boots
- \* Gray cable with green boots

Length	Item#	Package	Qty/ctn
1Ft	100721GY	PE bag	400
3Ft	100723GY	PE bag	150
5Ft	100724GY	PE bag	120
7Ft	100725GY	PE bag	120
10Ft	100726GY	PE bag	100
15Ft	100727GY	PE bag	70
25Ft	100728GY	PE bag	50
50Ft	100729GY	PE bag	25
75Ft	100730GY	PE bag	20

# Category 6 PIMF Patch Cable

Conductor	Material/Size	Bare Copper/26AWG
Insulation	Material	Foam-Skin PE
	Thickness	Nominal:0.27mm
	Diameter	Nominal:1.08mm
	Colors	Blue/White Orange/White Green/White Brown/White
	Unaged Elongation	Min.100%
	Unaged Tensile Strength	Min.0.816Kg/mm <sup>2</sup>
Screen	Material	Aluminum-Mylar tape and tinned copper braid
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal:0.5mm
	Diameter	Nominal:5.7mm
	Color	Assorted upon request
	Unaged Elongation	Min.100%
	Unaged Tensile Strength	Min.1.407Kg/mm <sup>2</sup>
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking	YFC CAT.6 SSTP PATCH 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-5-2 & IEC 60332-1-2 26AWGX4P CM(UL) c(UL) E164469-XX or as customer request.	

## Cat.6 Shielded Patch Cables(SSTP)

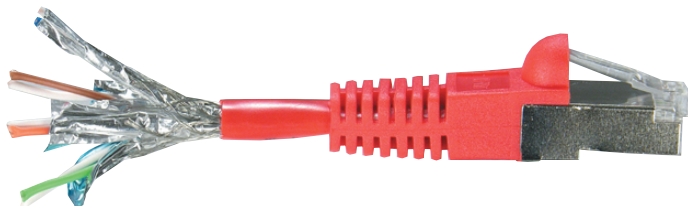

- \* 26AWG bare copper wire
- \* Standard 568B twisted 4 Pair
- \* Double shield protection (Each pair foiled, 4pair braided)
- \* 50 micron gold plated shielded Rj45 plug
- \* Injection mold snagless boots

Length	Item#						Package Qty/ctn				
0.5Ft	100816BK	100816BL	100816GY	100816GN	100816OR		100816RD	100816WT	100816YW	PE bag	300
1Ft	100801BK	100801BL	100801GY	100801GN	100801OR	100801PU	100801RD	100801WT	100801YW	PE bag	200
2Ft	100802BK	100802BL	100802GY	100802GN	100802OR		100802RD	100802WT	100802YW	PE bag	150
3Ft	100803BK	100803BL	100803GY	100803GN	100803OR	100803PU	100803RD	100803WT	100803YW	PE bag	150
4Ft	100800BK	100800BL	100800GY	100800GN	100800OR		100800RD	100800WT	100800YW	PE bag	120
5Ft	100804BK	100804BL	100804GY	100804GN	100804OR	100804PU	100804RD	100804WT	100804YW	PE bag	110
6Ft	100814BK	100814BL	100814GY	100814GN	100814OR	100814PU	100814RD	100814WT	100814YW	PE bag	120
7Ft	100805BK	100805BL	100805GY	100805GN	100805OR	100805PU	100805RD	100805WT	100805YW	PE bag	100
10Ft	100806BK	100806BL	100806GY	100806GN	100806OR	100806PU	100806RD	100806WT	100806YW	PE bag	80
15Ft	100807BK	100807BL	100807GY	100807GN	100807OR		100807RD	100807WT	100807YW	PE bag	60
20Ft	100815BK	100815BL	100815GY	100815GN	100815OR		100815RD	100815WT	100815YW	PE bag	60
25Ft	100808BK	100808BL	100808GY	100808GN	100808OR	100808PU	100808RD	100808WT	100808YW	PE bag	35
50Ft	100809BK	100809BL	100809GY	100809GN	100809OR	100809PU	100809RD	100809WT	100809YW	PE bag	20
75Ft	100810BK	100810BL	100810GY	100810GN	100810OR	100810PU	100810RD	100810WT	100810YW	PE bag	20
100Ft	100811BK	100811BL	100811GY	100811GN	100811OR	100811PU	100811RD	100811WT	100811YW	PE bag	20
125Ft	100890BK	100890BL	100890GY							PE bag	16
150Ft	100812BK	100812BL	100812GY							PE bag	16
175Ft	100891BK	100891BL	100891GY							PE bag	8
200Ft	100813BK	100813BL	100813GY	100813GN	100813OR		100813RD	100813WT	100813YW	PE bag	8



## Cat.6 Shielded Cross Cables(SSTP)



- \* 26AWG bare copper wire
- \* Standard 568B twisted 4 Pair
- \* 50 micron gold plated shielded Rj45 plug
- \* Injection mold snagless boots
- \* Gray cable with green boots

Length	Item#	Package	Qty\ctn
1Ft	100823GY	PE bag	200
3Ft	100824GY	PE bag	150
5Ft	100825GY	PE bag	110
7Ft	100826GY	PE bag	100
10Ft	100827GY	PE bag	80
15Ft	100828GY	PE bag	60
25Ft	100829GY	PE bag	35
50Ft	100830GY	PE bag	20
100Ft	100831GY	PE bag	20

## Cat.6 Flat Patch Cable



- \* 32AWG bare copper wire
- \* Standard 568B twisted 4 Pair
- \* 50 micron gold plated Rj45 plug
- \* Injection mold snagless boots


Length	Item#	Package	Qty\ctn
0.5Ft	100731BK	PE bag	
1Ft	100732BK	PE bag	600
1.5Ft	100733BK	PE bag	600
2Ft	100734BK	PE bag	600
3Ft	100735BK	PE bag	350
4Ft	100736BK	PE bag	300
5Ft	100737BK	PE bag	300
6Ft	100738BK	PE bag	250
7Ft	100739BK	PE bag	250
10Ft	100740BK	PE bag	200
15Ft	100741BK	PE bag	150
20Ft	100742BK	PE bag	100
25Ft	100743BK	PE bag	90
35Ft	100744BK	PE bag	70
45Ft	100745BK	PE bag	60

# Category 6A UTP Patch Cable

Conductor	Material/Size	Bare Copper/24AWG
Insulation	Material	HDPE
	Thickness	Nominal:0.20mm
	Diameter	Nominal:1.0mm
	Colors	Blue/White-Blue Orange/White-Orange Green/White-Green Brown/White-Brown
	Unaged Elongation	Min.300%
	Unaged Tensile Strength	Min.1.683Kgf/mm <sup>2</sup>
	Jacket	Material
Thickness		Nominal:0.65mm
Diameter		Nominal:7.5mm
Color		Assorted upon request
Unaged Elongation		Min.100%
Unaged Tensile Strength		Min.1.407Kgf/mm <sup>2</sup>
Aging at 100°C for 168Hrs		Min. elongation retention:50% Min. tensile strength retention:75%
Marking	YFC CAT.6A UTP PATCH CONFORM TO ANSI/TIA-568-C.2 24AWGX4P CM(UL) c(UL) E164469-XX	
	or as customer request.	

(PS): " + " Mould separate

## Cat.6A Patch Cables(UTP)

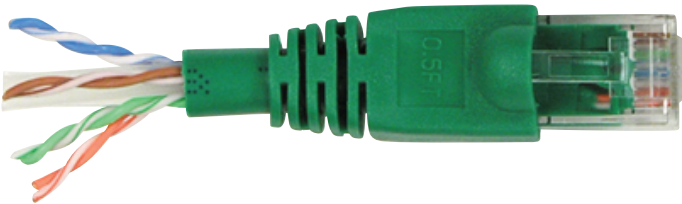

- \* 26AWG stranded bare copper wire
- \* Standard 568B twisted 4 Pair

Length	Item#						Package Qty/ctn					
0.5Ft				100750GN						100750YW	PE bag	400
1Ft	100751BK	100751BL	100751GY	100751GN	100751OR			100751RD	100751WT	100751YW	PE bag	300
2Ft	100752BK	100752BL	100752GY	100752GN	100752OR			100752RD	100752WT	100752YW	PE bag	180
3Ft	100753BK	100753BL	100753GY	100753GN	100753OR			100753RD	100753WT	100753YW	PE bag	120
4Ft	100754BK	100754BL	100754GY	100754GN	100754OR			100754RD	100754WT	100754YW	PE bag	120
5Ft	100755BK	100755BL	100755GY	100755GN	100755OR		100755PU	100755RD	100755WT	100755YW	PE bag	100
6Ft	100756BK	100756BL	100756GY	100756GN	100756OR			100756RD	100756WT	100756YW	PE bag	80
7Ft	100757BK	100757BL	100757GY	100757GN	100757OR		100757PU	100757RD	100757WT	100757YW	PE bag	80
10Ft	100758BK	100758BL	100758GY	100758GN	100758OR			100758RD	100758WT	100758YW	PE bag	80
15Ft	100759BK	100759BL	100759GY	100759GN	100759OR			100759RD	100759WT	100759YW	PE bag	40
20Ft	100760BK	100760BL	100760GY	100760GN	100760OR			100760RD	100760WT	100760YW	PE bag	30
25Ft	100761BK	100761BL	100761GY	100761GN	100761OR			100761RD	100761WT	100761YW	PE bag	30
35Ft	100762BK	100762BL	100762GY	100762GN		100762PK		100762RD	100762WT	100762YW	PE bag	30
50Ft	100763BK	100763BL	100763GY	100763GN	100763OR	100763PK		100763RD	100763WT	100763YW	PE bag	20
75Ft	100764BK	100764BL	100764GY		100764OR			100764RD	100764WT	100764YW	PE bag	20
100Ft	100765BK	100765BL	100765GY	100765GN	100765OR		100765PU	100765RD	100765WT	100765YW	PE bag	16

# Category 7 PIMF Patch Cable

Conductor	Material/Size	Bare Copper/26AWG
Insulation	Material	Foam-Skin PE
	Thickness	Nominal:0.3mm
	Diameter	Nominal:1.08mm
	Colors	Blue/White Orange/White Green/White Brown/White
	Unaged Elongation	Min.100%
	Unaged Tensile Strength	Min.0.816Kgf/mm <sup>2</sup>
Screen	Material	Aluminum-Mylar tape and tinned copper braid
Jacket	Material	Flame Retardant PVC
	Thickness	Nominal:0.5mm
	Diameter	Nominal:5.7mm
	Color	Assorted upon request
	Unaged Elongation	Min.100%
	Unaged Tensile Strength	Min.1.407Kgf/mm <sup>2</sup>
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%
Marking	YFC CAT.7 SSTP PATCH 3P VERIFIED TO ANSI/TIA-568-B.2-1 & ISO/IEC 11801 ED.2 & EN 50288-4-2 & IEC 60332-1-2 26AWGX4P CM(UL) c(UL) E164469-XX or as customer request.	

## Cat.7 Patch Cables




- \* 26AWG bare copper wire
- \* Standard 568B twisted 4 Pair
- \* 50 micron gold plated shielded RJ45 plug
- \* Injection mold snagless boots

Length	Item#	Package	Qty/ctn
1Ft	100320BL	PE bag	200
2Ft	100321BL	PE bag	150
3Ft	100322BL	PE bag	150
4Ft	100323BL	PE bag	120
5Ft	100324BL	PE bag	110
6Ft	100325BL	PE bag	120
7Ft	100326BL	PE bag	100
8Ft	100327BL	PE bag	110
9Ft	100328BL	PE bag	80
10Ft	100329BL	PE bag	80
12Ft	100330BL	PE bag	70
15Ft	100331BL	PE bag	60
20Ft	100332BL	PE bag	60
25Ft	100333BL	PE bag	35
30Ft	100334BL	PE bag	35
40Ft	100335BL	PE bag	30
50Ft	100336BL	PE bag	20
100Ft	100341BL	PE bag	20

Patch cord

## LED Patch Panel



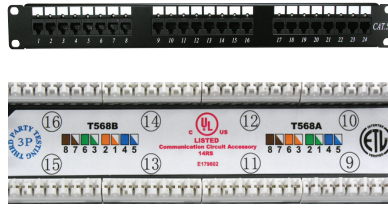


## Instant Port Identification

LED Patch panel is a powerful port identification solution ,especially when managing large scale networking. With LED patch panel and Signal Generator(102213),you can instantly identify ports with-out removing panel wiring or shutting down system,NO more cumbersome trial and error port search with tone generator and probe.Just connect the Signal Generator to wall plate.and the LED indicator on the patch panl instantly guides you to the corresponding port.

Description	Item#	Std Pkg Qty	Package	Qty\ctn
Cat.5E 24 Port	102212	1	Blank box	20
Cat.5E 48 Port	102228	1	Blank box	10
Cat.6 24 Port	102229	1	Blank box	20
Cat.6 48 Port	102230	1	Blank box	10
LDE ID Signal Generator	102213	1	Blank box	50



## Cat.5E and Cat.6 Patch Panels 110 Type 568A/568B Wiring UL Listed

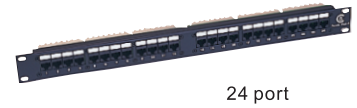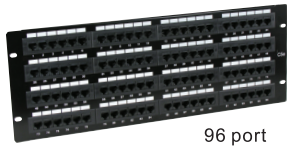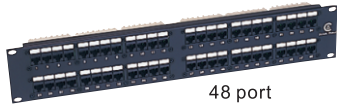

- \* UL listed
- \* Meets TIA/EIA-568B.2-1 Cat.5E ISO/IEC 11801 and EN 50173-1 specification
- \* Support T568A & B Wiring
- \* Wire Diameter:22~26AWG
- \* Insulation Diameter Range:0.70~1.40mm
- \* Jack Contacts:Phosphir Bronze,50micron Gold Plate over Nickel Plating
- \* IDC Contacts:Phosphor Bronze,50micron Gold Plate over Nicker Plating
- \* Safety:UL 1863
- \* Flamability:UL 94 VO
- \* Operating Temperature:-40 to 70 C

Description	Item# (Cat. 5E)	Std Pkg Qty	Package	Qty\ctn	Item# (Cat. 6)	Std Pkg Qty	Package	Qty\ctn
12Port Vertical with Bracket	102201	1	Blank box	24	102206	1	Blank box	24
12Port 1U Rackmount 19"	102202	1	Blank box	20	102207	1	Blank box	20
16Port 1U Rackmount 19"	102225	1	Blank box	20	102226	1	Blank box	20
24Port 1U Rackmount 19"	102203	1	Blank box	20	102208	1	Blank box	20
48Port 2U Rackmount 19"	102204	1	Blank box	10	102209	1	Blank box	10
96Port 4U Rackmount 19"	102205	1	Blank box	10	102210	1	Blank box	10


## Shielded Patch Panels UL Listed

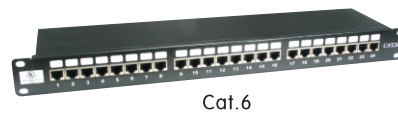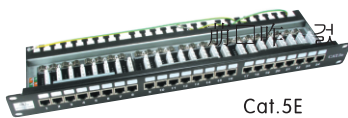

Description	Item#	Std Pkg Qty	Package	Qty\ctn
24 Port Cat.5E Shielded	102211	1	Blank box	10
24 Port Cat.6 Shielded	102241	1	Blank box	10




## 19" Cable Manager

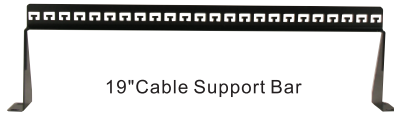


Description	Item#	Std Pkg Qty	Package	Qty/ctn
19"1U Cable Support Bar	102219	1	Blank box	9

### Plastic Ring

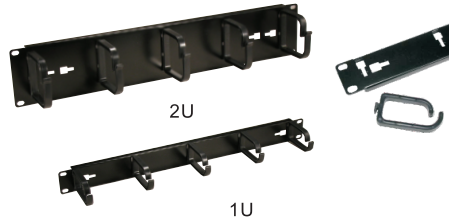


Description	Item#	Std Pkg Qty	Package	Qty/ctn
19"1U Cable Management	102217	1	Blank box	50
19"2U Cable Management	102218	1	Blank box	30

### Metal Ring

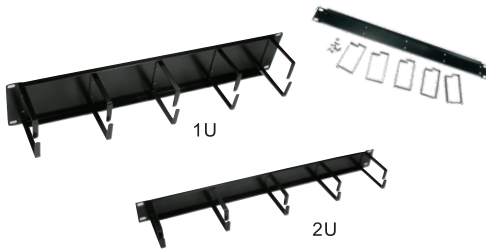


Description	Item#	Std Pkg Qty	Package	Qty/ctn
19"1U Cable Management	102242	1	Blank box	50
19"2U Cable Management	102243	1	Blank box	30

## 19" Patch Panel Wallmount Hinges

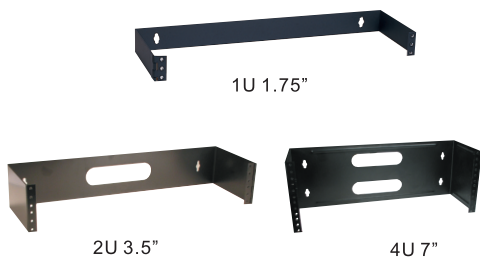

Description	Item#	Std Pkg Qty	Package	Qty/ctn
1U 12 for 12/24 Port 1.75"	102215	1	Blank box	16
2U for 48 Port 3.5"	102216	1	Blank box	8
4U for 96 Port 7"	102227	1	Blank box	4

## 19" Blank Keystone Patch Panels

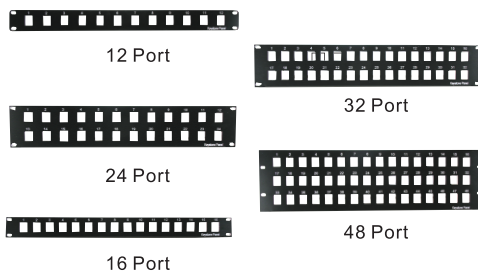

Description	Item#	Std Pkg Qty	Package	Qty/ctn
1U 12 Port 1.75"	102220	1	Blank box	25
1U 16 Port 1.75"	102221	1	Blank box	25
2U 24 Port 3.5"	102222	1	Blank box	25
2U 32 Port 3.5"	102223	1	Blank box	25
4U 48Port 7"	102224	1	Blank box	30

## 19" Extendable Wallmount Hinges




Description	Item#	Std Pkg	Qtg	Package	Qty\ctn
1U 1.75" High	102233	1		Blank box	
2U 3.5" High	102234	1		Blank box	4
4U 7" High	102235	1		Blank box	2
8U 14" High	102236	1		Blank box	2

## CAT.6A 24-Port Shielded Blank Patch Panel with Cable Management




Description	Item#	Std Pkg	Qtg	Package	Qty\ctn
Cat.6A 24-Port Snap-in Shielded Blank	102237	1		Blank box	14

## 1U 48-Port High Density Blank Patch Panel with Cable Management

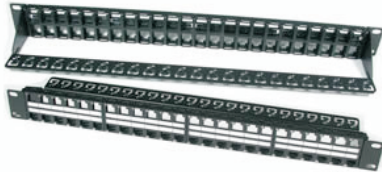

Description	Item#	Std Pkg	Qtg	Package	Qty\ctn
1U 48-Port High Density Blank Patch Panel	102238	1		Blank box	14

## 19" Spacer Blank

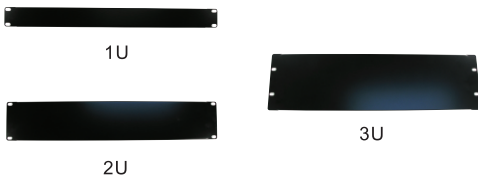

Description	Item#	Std Pkg	Qtg	Package	Qty\ctn
1U Spacer Blank 1.75"	102251	1		Blank box	
2U Spacer Blank 3.5"	102252	1		Blank box	
3U Spacer Blank 5.25"	102253	1		Blank box	
4U Spacer Blank 7"	102254	1		Blank box	

## Wallmount Cabinet DIY Kit



102232


102255

Description	Item#	Std Pkg	Qtg	Package	Qty\ctn
6U Wallmount Cabinet DIY Kit	102232	1		Blank box	1
9U Wallmount Cabinet DIY Kit	102255	1		Blank box	1





## Networking Tools

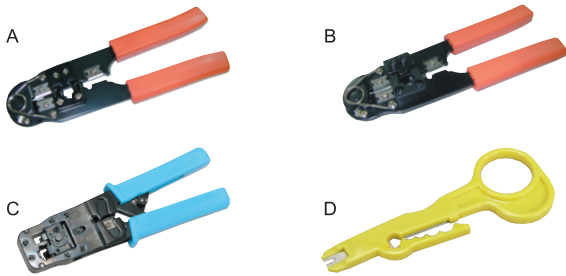

- \* RJ11/12/45 Modular Plug Crimper with Cutter and Stripper
- \* Punch Down Tool with 66&110/88 Blades
- \* Utility Knife
- \* 4 1/2" Diagonal Cutting Pliers
- \* 2-in-1 Reversible Screwdriver
- \* LAN Cable Tester

Description	Item#	Std Pkg Qtg	Package	Qty\ctn
RJ11/12 Crimper	102220	1	color box	25
Rj45 Crimper	102221	1	color box	25
RJ11/12&45 Ratchet Crimper	102222	1	color box	25
LAN Cable Stripperr/puncher	102223	1	color box	25



Description	Item#	Std Pkg Qtg	Package	Qty\ctn
10 Pieces Network Tool Kit	252021	1	color box	6

## Punchdown Tools



Impact Type



Non-Impact Type



Punchdown Holder

Description	Item#	Std Pkg Qtg	Package	Qty\ctn
110 Impact Punch Down Tool	250105	1	color box	72
110 Non-Impact Punch Down Tool	250106	1	color box	72
66/110 Impact Punch Down Tool	250107	1	color box	72
Keystone Jack Punchdown Holder	250109	1	color box	

## Replacement Blade for Punchdown Tools



66 Type




110 Type



66/110 Type

Description	Item#	Std Pkg Qtg	Package	Qty\ctn
Replacement Blade for 66 Type	250120	1	color box	100
Replacement Blade for 110 Type	250121	1	color box	100
Replacement Blade for 66/100 Type	250122	1	color box	100

## RJ45 Modular Plugs, 100pc/bag, Qty=1 bag

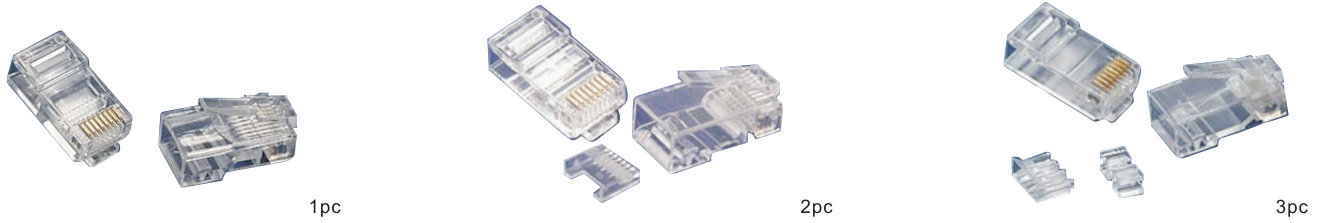

		Description	Item#	Std Pkg Qty	Package	Qty\ctn	
Cat.5E	UTP	Solid	6 Micron, 1pc	101209	100	PE bag	5000
			50 Micron, 1pc	101204	100	PE bag	5000
			50 Micron, 2pc	101225	100	PE bag	5000
		Stranded	6 Micron, 1pc	101201	100	PE bag	5000
			50 Micron, 1pc	101203	100	PE bag	5000
			50 Micron, 2pc	101224	100	PE bag	5000
	STP	Solid	50 Micron, 2pc	101227	100	PE bag	5000
		Stranded	50 Micron, 2pc	101226	100	PE bag	5000
	Cat.6	UTP	Solid	50 Micron, 2pc	101402	100	PE bag
Stranded			50 Micron, 2pc	101228	100	PE bag	5000
STP		Solid	50 Micron, 2pc	101230	100	PE bag	5000
		Stranded	50 Micron, 2pc	101229	100	PE bag	5000
Cat.6A	UTP	Solid	50 Micron, 3pc	101232	100	PE bag	5000
		Stranded	50 Micron, 3pc	101231	100	PE bag	5000
	STP	Solid	50 Micron, 3pc	101234	100	PE bag	5000
		Stranded	50 Micron, 3pc	101233	100	PE bag	5000

## Color Boots for RJ45 Plug, 100pc/bag, Qty1=1 bag



Description	Item#									Std Pkg Qty	Package	Qty\ctn
Color Boots for RJ 45 Plug	101301BK	101301BL	101301GY	101301GN	101301OR	101301PU	101301RD	101301WT	101301YW	100	PE bag	5000


## Cat.6 Toolless Re-Usable RJ45 Plug



Description	Item#	Std Pkg Qty	Package	Qty\ctn
Cat.6 Toolless Re-Usable RJ45 Plug	101405	100	PE bag	




## TOOL Less RJ45 Keystone Jacks UL Listed

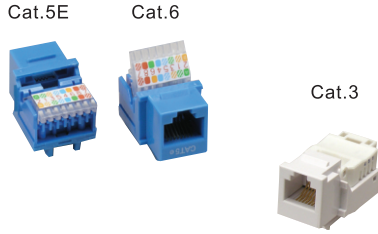

Port	Item#	Std Pkg Qty	Package	Qty/ctn
Cat.5E	101605	100	PE bag	500
Cat.6	101705	100	PE bag	500
Cat.3 (RJ11/12)	101506	100	PE bag	500


## 110 Type Cat.5E/Cat.6/Cat.3 Keystone Jacks UL Listed

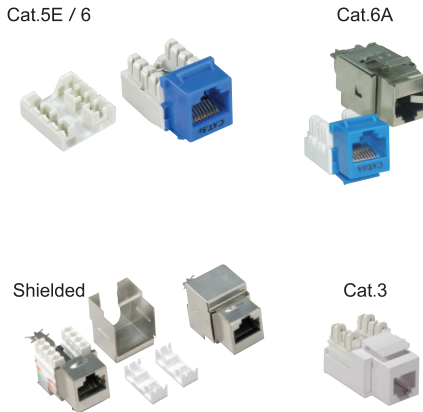

Cat.5E / 6, Available in 9 Colors: Ivory, Gray, Black, White  
Orange, Red, Blue, Green, Yellow

Port	Item#	Std Pkg Qty	Package	Qty/ctn
Cat.5E	101603	100	PE bag	500
Cat.5E Shielded	101604	100	PE bag	400
Cat.6	101703	100	PE bag	500
Cat.6 Shielded	101704	100	PE bag	400
Cat.6A	101720BL	100	PE bag	400
Cat.6A Shielded	101721	100	PE bag	400
Cat.3 (RJ11)	101501	100	PE bag	400

## Keystone Wall Plate Snap-in Modules

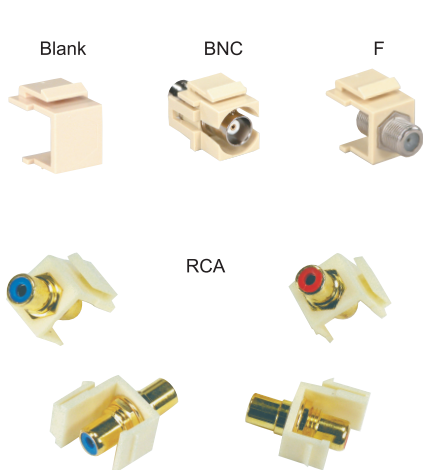

Bracket available in 2 Colors WT IV

Port	Item#	Std Pkg Qty	Package	Qty/ctn
Blank Insert	101806	100	PE bag	8000
F Type F/F	101812	100	PE bag	1400
BNC F/F	101813	100	PE bag	2000
RCA F/F White	101817W	100	PE bag	2000
RCA F/F Red	101817R	100	PE bag	2000
RCA F/F Yellow	101817Y	100	PE bag	2000
RCA F/F Blue	101817B	100	PE bag	2000
RCA F/F Green	101817G	100	PE bag	2000
Banana F/F Red	101820R	100	PE bag	2000
Banana F/F White	101820W	100	PE bag	2000

Keystone Jack

## RJ45 Surface Mount Boxes



Box only ( without Keystone Jack )

Available in 2 Colors  WT  IV

Description	Item#	Std Pkg Qtg	Package	Qty/ctn
RJ 45 1 Port	101911	100	PE bag	500
RJ 45 2 Port	101912	100	PE bag	250



Box with 110 Keystone Jack

Available in 2 Colors  WT  IV

Port	Item#	Std Pkg Qtg	Package	Qty/ctn
Cat.5E 1 Port	101901	100	PE bag	500
Cat.5E 2 Port	101902	100	PE bag	250
Cat.6 1 Port	101904	100	PE bag	500
Cat.6 2 Port	101905	100	PE bag	250
Cat.5E 8 Port	101903WT	100	PE bag	20
Cat.6 8 Port	101906WT	100	PE bag	20



PCB Type

Port	Item#	Std Pkg Qtg	Package	Qty/ctn
Cat.5E 1Port	101909WT	100	PE bag	250
Cat.5E 2Port	101910WT	100	PE bag	250

## Cat.5 A80° RJ45 H.D. Keystone Jack



Port	Item#	Std Pkg Qtg	Package	Qty/ctn
Cat.5 180° RJ45 H.D. Keystone Jack	101606WT	100	PE bag	250

## Cat.6 180° RJ45 H.D. Keystone Jack



Port	Item#	Std Pkg Qtg	Package	Qty/ctn
Cat.6 180° RJ45 H.D. Keystone Jack	101706WT	100	PE bag	250


## Cat.6A 180° RJ45 H.D. Shielded Keystone Jack



Port	Item#	Std Pkg Qtg	Package	Qty/ctn
Cat.6A 180° RJ45 H.D. Shielded Keystone Jack	101722	100	PE bag	500



## RJ45 Keystone Couplers

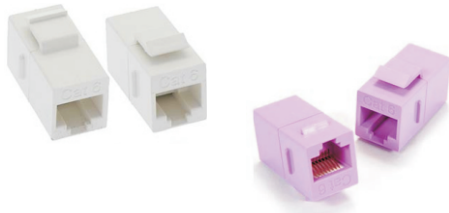

Available in 10 Colors

Port	Item#	Std Pkg Qty	Package	Qty\ctn
Cat.5E	102009	100	PE bag	1000
Cat.6	102010	100	PE bag	1000

## Cat.5E and Cat.6 Inline Couplers



Port	Item#	Std Pkg Qty	Package	Qty\ctn
Cat.5E	102001WT	100	PE bag	1000
Cat.5E Crossover	102002WT	100	PE bag	500
Cat.5E Shielded	102003	100	PE bag	1000
Cat.6	102004WT	100	PE bag	1000
Cat.6 Shielded	102011	100	PE bag	500

## Cat.5E and Cat.6 Inline Splicers




Port	Item#	Std Pkg Qty	Package	Qty\ctn
Cat.5E 110 Type	102006WT	100	PE bag	100
Cat.6 110 Type	102007WT	100	PE bag	100

## Keystone Jack Wall Plates



Smooth Face Type Mounting Screw included  WT  IV


Port	Item#	Std Pkg Qty	Package	Qty\ctn
1	101831	1	PE bag	400
2	101832	1	PE bag	400
3	101833	1	PE bag	400
4	101834	1	PE bag	400
6	101835	1	PE bag	400



Decora Type

Port	Item#	Std Pkg Qty	Package	Qty\ctn
1	101801	1	PE bag	350
2	101802	1	PE bag	350
3	101803	1	PE bag	350
4	101804	1	PE bag	350
6	101805	1	PE bag	350

## Junction Box Single Gang



Available in 2 Colors  WT  IV

4 1/2"(H) x 2 3/4"(W) x 1 7/8"(D)

Description	Item#	Std Pkg Qty	Package	Qty\ctn
Junction Box Single Gang	103201	1	PE bag	100



**BestLink Networkware Inc.**

16220 Carmenita Rd.

Cerritos, CA 90703

Tel: 562-677-3200

Toll Free:855-456-8891

[www.bestlinknetworkware.com](http://www.bestlinknetworkware.com)

E-mail:[info@bestlinknetworkware.com](mailto:info@bestlinknetworkware.com)

