

Product Description:

ODF-RS-205 is 19inch 1U slidable type fiber optic patch panel. It is used in fiber optic cabinet for fiber splicing, connection, protection and management.

Features:


- 1.19inch rack mounted application.
- 2.Small size, no sliding rail, light weight and reasonable structure.
- 3.Material: Cold-rolled steel, electrostatic power painting.
- 4.Color: black.
- 5.Dismountable adapter panel, easy to operate.
- 6.FC, LC, ST, SC ... adapter port available.
- 7.Capacity: 12, 24, 48 fibers.
- 8.Max. 4 splice tray of 12FO, max. 48FO.
- 9.Can load cable arrangement panel (GTP-1U-01) in front of adapter panel; 4pcs Φ22 mm cable entry ports (with two kinds of design), if load M22 cable gland for 7~13mm cable entry; 20pcs Φ4.3mm round cable port at rear side.

Performance:




- 1.LC/UPC:IL≤0.30dB;RL≥50dB(@1330nm&1550nm).
- 2.Geometry(percent of pass≥85%):
Fiber Hight:-100~+100mm;
Radius of curvature:7~25mm;
Apex Offset:0~50μm;
- 3.The end face meets IEC 61300-3-35 standard.
- 4.Storage or transportation: -20℃ ~70℃
- 5.Operation: -10℃ ~60℃

Item (Carton)	X-Item (PE bag)	Length
105603	X5603	≥1m

NO.	Specifications	Dimension	Material	Color	Qty.
1	Steel box	482x205x43.5mm	Cold-roll steel	Black	1
2	Fiber optic splice tray	/	ABS plastic	White	1
3	LC duplex adaptor	/	/	Blue	6
4	PE White T-type dust cap	/	PE	White	6
5	Fiber optic pigtail	≥1m	/	12 Colors	12
01	First Issue		XY.WEI		01-11-2025
REV	REVISION RECORD DESP.	ECN.NO	ZONE	BY	DATE


TOLERANCE	±MM	PART DESCRIPTION		PART NO.	
X	—	Slidable Rack-mount ODF ODF-RS-205-12C		105603	
X.X	—	DRAWN XY.WEI		CHKD F.SUN	
X.XX	—			APROVED Ethan Cao	
X.XXX	—	SCALE	UNIT	QTY	PAGE
		—	mm	1 PCS	1 OF 4
REV	—				
P/N	—				



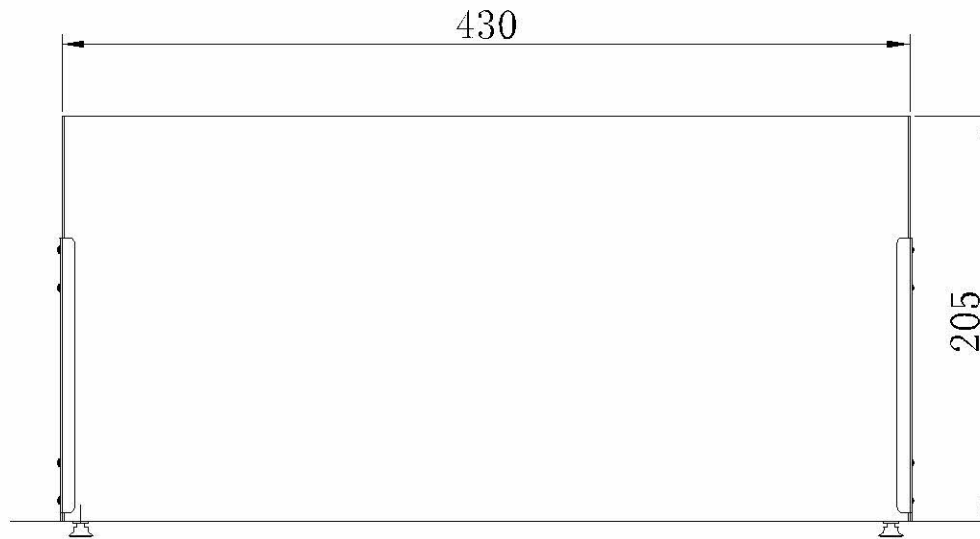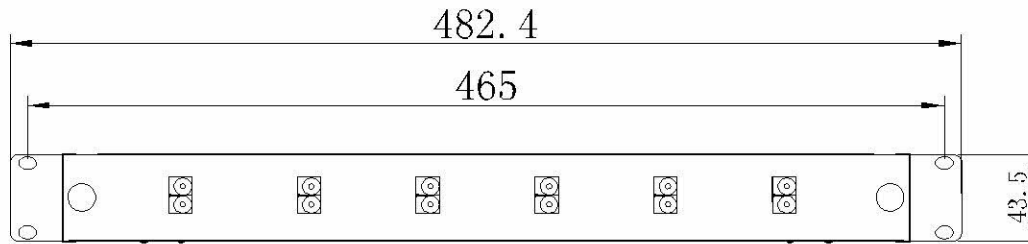

Item (Carton)	X-Item (PE bag)	Length
105603	X5603	≥1m

DRAWN		CHKD		APROVED
XY.WEI		F.SUN		Ethan Cao
SCALE	UNIT	QTY	PAGE	THIRD ANGLE PROJECTION
—	mm	1 PCS	2 OF 4	

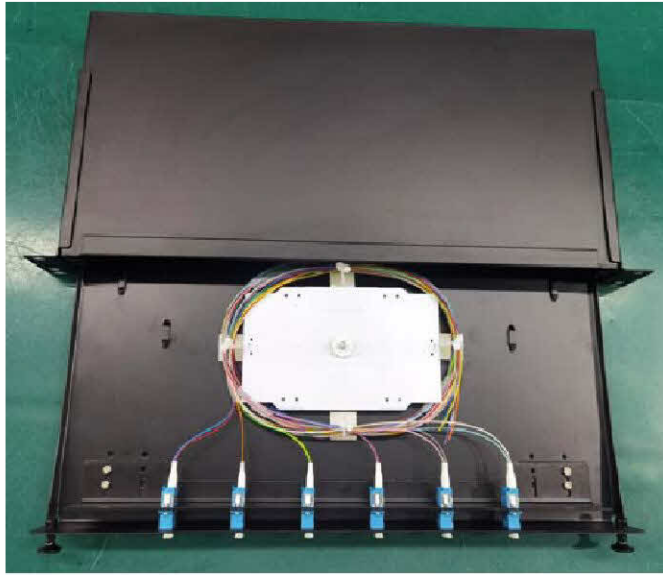

Picture of Accessories



Picture of real product

Descriptions of Accessories:

Item	Specification	QTY
Heat shrinkable protection sleeve	45*2.6*1.2mm	As per using capacity
Cable tie	3*120mm	4PCS
PG gland	M20	2PCS

DRAWN XY.WEI		CHKD F.SUN		APROVED Ethan Cao
SCALE —	UNIT mm	QTY 1 PCS	PAGE 3 OF 4	THIRD ANGLE PROJECTION 